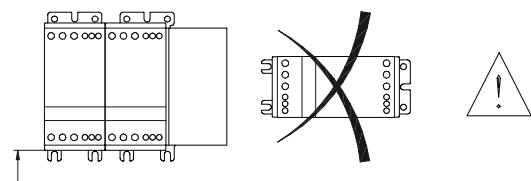



**Montering - Mounting  
Montage - Montage**


80 mm min.


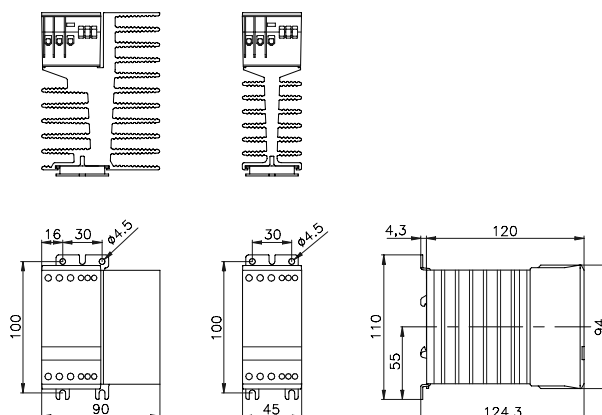


DK: Hvis enheden er monteret vandret, skal driftsstrømmen reduceres med 50%. Køleplade skal holdes ren. Luftstrømmen må ikke blokeres

UK: If the unit is mounted horizontally the current must be derated by 50%

DE: Falls Einheit horizontal montiert wird, muss der Strom um 50% reduziert werden

FR: En cas montage horizontal, réduire le courant de 50%


**Dimensioner - Dimensions  
Dimensionen - Dimensions**


DK: Køleplade skal holdes ren. Luftstrømmen må ikke blokeres

UK: Keep heatsink clean. Airflow must not be blocked

DE: Kühlflächen freihalten. Luftstrom muss ungehindert fließen

FR: Maintenir les plaques de refroidissement libres, l'air doit pouvoir circuler

**Forbindelse - Wiring - Verdrahtung - Cablage**

75°C Cu Wire/Kabel	mm <sup>2</sup>	mm <sup>2</sup>
*	1 x 0.75 - 4	1 x 0.5 - 1.5
	2 x 1.0	2 x 0.5 - 0.75
*	1 x 0.75 - 6	1 x 0.5 - 1.5
	2 x 0.75 - 4.5	2 x 0.5 - 1.5
*	1 x 0.75 - 6	1 x 0.5 - 1.5
	2 x 0.75 - 1.5	2 x 0.5 - 1.5
	Pozidrive 1 0.5 Nm max.	
	4 mm 0.5 Nm max.	3 mm 0.4 Nm max.




\* UL Tested

 - **Vigtigt** (Overhold max skruedrejningsmomenter)

 - **Important:** (Observe the maximum screw torque limits)

 - **Wichtig:** (Max. Drehmoment beachten)

Do not connect power factor correction capacitors to the output.

**SC 3 DX ....**

**SRC 3 DX ....**

**SMC 3 DA ..15 DOL**


UL: Use thermal overload protection as required by the National Electric Code.

UL: SMC.. DOL / SRC. When protected by a non-time delay K5 or H Class fuse, rated 266 % of motor FLA, this device is rated for use on a circuit capable of delivering not more than 5,000 rms. symmetrical amperes, 600 V maximum.

Maximum surrounding temperature 40°C.

DK: Se specifikationer i datablad UK: See recommendation in datasheet

DE: Empfehlungen im Datenblatt beachten

