

1844 KERN is founded – precision balances are produced
1863 A proud Gottlieb Kern with his staff
1880 Pharmaceutical balance with Aesculap
1923 Inflation – KERN wages are paid with self printed currency
1980 The electronic balance ousts mechanical devices



1994 Accredited DKD laboratory (ISO 17025)
2000 New premises in Balingen
2002 Existing QM system certification in accordance with DIN EN ISO 9001:2000 standards
2007 Approval for the manufacture of medical products (DIN EN 13485 and 93/42/EEC)
2008 Authorisation for initial verification by the manufacturer (2009/23/EC)



2009 Approval for the manufacture and sale of height rods (DIN EN 13485 and 93/42/EEC)
2012 Verification point for non-automatic balances and test weights.
 New customer portal www.kern-sohn.com goes live
2014 Expansion of the product range to include optical instruments (microscopes and refractometers)
2015 Inauguration of Ziegelei 2.0 with computer-controlled high-bay warehouse
2017 Come with KERN into the digital future: Expansion of the model ranges compatible with Industry 4.0, as well as the related services



MICROSCOPES & REFRACTOMETERS – for laboratory, industry and food

2018

GB

GB

MICROSCOPES & REFRACTOMETERS

for laboratory, industry and food



2018























KERN Models A – Z

OBB-C	80	ORF	98
OBD-1	20	ORT-1	103
OBE-1	11	OSE-4	46
OBF-1	14	OSF-4G	48
OBL-12 - OBL-13	16	OZB-H	80
OBL-14 - OBL-15	18	OZB-IR	83
OBN-13	22	OZB-M	74
OBN-14	26	OZB-S	81
OBN-15	24	OZB-U	79
OBS-1	9	OZC-5	66
OCM-1	28	OZG-4	68
OCS-9	44	OZL-44	50
ODC-1	85	OZL-45	54
ODC-8	86/87	OZL-45R	56
ODC-9	88	OZL-46	52
OKM-1	31	OZL-9	72
OKN-1	33	OZM-5	58
OKO-1	33	OZM-9	72
OLE-1	35	OZP-5	60
OLF-1	35	OZR-5	62
OLM-1	37	OZS-5	64
OPE-1	40	VIS (OXM-9)	89
OPM-1	42	Blowout sale	106
OPN-1	42	Checklist for your microscope	108
OPO-1	42	Checklist for your refractometer	114
ORA	92		

For an overview of the symbols, see the reverse side



KERN Pictograms

 360° rotatable microscope head	 Parallel optical system For stereomicroscopes, enables fatigue-proof working
 Monocular Microscope For the inspection with one eye	 Integrated scale In the eyepiece
 Binocular Microscope For the inspection with both eyes	 SD card For data storage
 Trinocular Microscope For the inspection with both eyes and the additional option for the connection of a camera	 USB 2.0 digital camera For direct transmitting of the picture to a PC
 Abbe Condenser With high numerical aperture for the concentration and the focusing of light	 USB 3.0 digital camera For direct transmitting of the picture to a PC
 Halogen illumination For pictures bright and rich in contrast	 WLAN data interface: For transmitting of the picture to a mobile display device
 LED illumination Cold, energy saving and especially long-life illumination	 HDMI digital camera For direct transmitting of the picture to a display device
 Incident illumination For non-transparent objects	 PC software To transfer the measurements from the device to a PC.
 Transmitting illumination For transparent objects	 Automatic temperature compensation For measurements between 10 °C and 30 °C
 Fluorescence illumination For stereomicroscopes	 Protection against dust and water splashes IPxx The type of protection is shown by the pictogram.
 Fluorescence illumination for compound microscopes With 100 W mercury lamp and filter	 Battery operation Ready for battery operation. The battery type is specified for each device.
 Fluorescence illumination for compound microscopes With 3 W LED illumination and filter	 Battery operation rechargeable Prepared for a rechargeable battery operation
 Phase contrast unit For a higher contrast	 Mains adapter 230V/50Hz in standard version for EU. On request GB, AUS or USA version.
 Darkfield condenser/unit For a higher contrast due to indirect illumination	 Power supply Integrated in balance. 230V/50Hz standard EU. More standards e.g. GB, AUS or USA on request.
 Polarising unit To polarise the light	 Package shipment The time required to manufacture the product internally is shown in days in the pictogram.
 Infinity system Infinity corrected optical system	
 Zoom magnification For stereomicroscopes	

Abbreviations

C-Mount	Adapter for the connection of a camera to a trinocular microscope	SLR camera	Single-Lens Reflex camera
FPS	Frames per second	SWF	Super Wide Field (Field number at least Ø 23 mm for 10× eyepiece)
H(S)WF	High (Super) Wide Field (Eyepiece with high eye point for wearers of glasses)	W.D.	Working Distance
LWD	Long Working Distance	WF	Wide Field (Field number up to Ø 22 mm for 10× eyepiece)
N.A.	Numerical Aperture		

Why you should choose a KERN microscope now!

For over 170 years, KERN & SOHN has been synonymous with high precision weighing and measuring technology. This claim is the driving force for the development of our microscope and refractometer ranges.

By working closely with you and our production partners, within 3 years we have developed a complete product range of high-quality microscopes and refractometers.

Thanks to consistent customer focus paired with smart ideas and the latest available technology we are proud to be suppliers of high-quality, durable top microscopes and refractometers, which help you to be as efficient as possible in your daily work.

When developing our microscopes we have concentrated on the very best optical quality and have used only high-quality glass and the latest technologies to achieve this. The high-quality Philips halogen and modern LED illumination produce razor-sharp images with high contrast and which will impress you with their brilliant true-colour display – you must have noticed this yourself.

Your advantages:

- all mechanical parts have been designed for a long service life
- special attention has been given to the ergonomics of our microscopes, as this allows the user to work for several hours in a comfortable position which does not cause fatigue
- our microscopes are fully-equipped and can be used immediately
- Highlight for 2018: die KERN camera software – you will be amazed at how user-friendly and intuitive it is
- and much more...

Use our practical “Check list for microscopes and refractometers”, which may help you to quickly determine specifications for the future instrument. Together with our KERN product specialist you can choose the right product for you.

If there is no suitable product in the standard range, for example, then we will of course configure an individual microscope for you.

Our aim is to develop a market-driven product solution, so with our microscope and refractometer range, the saying holds true: good quality at a competitive price! This is what we stand for and work towards, every day!

With our current 2018 product range you can benefit from improved quality and a clear reduction in price, which we have been able to achieve through more efficient production methods and increased global sales of our microscopes and refractometers and of course we pass this straight on to you

Do you have any questions about our range of microscopes and refractometers?

Your KERN customer consultants are available at any time to help you further.

I hope that you enjoy working efficiently with our KERN Optics products.



Albert Sauter, Managing Director

Notes

Important notice

Humidity

Our models are not suitable for rooms with a high level of air humidity (condensing). Please observe the applicable electrical regulations.

Miscellaneous

Product pictures printed in catalogue

All product pictures contained in our catalogue show devices similar to our products. Please note that possible technical innovations might be the cause of such deviations.

Accessory for optical instruments

Further extensive accessories for our optical instruments you can also find in the KERN Online shop on www.kern-sohn.com

Product group index 2018



Microscopes

Compound microscopes

08

01

Metallurgical microscopes

30

02

Polarising microscopes

39

03

Stereomicroscopes

45

04

Stereo microscope sets

71

05

Stereo microscope modular system

73

06

External light sources for stereomicroscopes

82

07

Microscope cameras & Software

84

08



Refractometers

Analogue refractometers – type: hand-held

92

09

Digital refractometers – type: hand-held

98

10

Abbe refractometers – type: desktop

103

11

HIGHLIGHTS 2018

Our highlights 2018: Innovative products in the usual KERN quality:

EDUCATIONAL LINE KERN OBS series

The new school microscope.
The perfect companion for
biology lessons



Further details ▶ page 9

LAB LINE KERN OCM Inverted microscope

The inverted biological laboratory
microscope – also with fluorescence



Further details ▶ page 28

LAB LINE KERN OBL phase contrast

Phase contrast procedure made
easy through powerful features



Further details ▶ page 18

KERN 100× objectives (water/dry)

Generate 1000× magnification
WITHOUT using oil. Water and air are
then used as the immersion media,
which ensures high-quality imaging.



Further details ▶ page 10, 12, 13, 15, 17, 19, 21

PROFESSIONAL LINE KERN OBN phase contrast

Fully-equipped phase contrast
microscope for a high level of
flexibility



Further details ▶ page 24

LED Fluorescence microscope

Expansion of our fluorescence
microscope range with a model
which is equipped with modern
LED technology



Further details ▶ page 26

LAB LINE KERN OLM Inverted microscope

The inverted metallurgical
microscope for professional
applications



Further details ▶ page 37

Stereomicroscopes KERN OZL-46

The bestseller range has grown
to include models with integrated
ring illumination units and a
practical carrying handle



Further details ▶ page 52

KERN stereo microscope sets

Preconfigured stereo microscope set including stand and illumination for a large working distance



Further details ▶ page 72

Stereo microscope modular system

Universal configuration for the very best level of flexibility and individual work



Further details ▶ from page 74

Polarisation ring illumination OZB-A7101

NEW

Powerful polarisation ring illumination unit which has been specially optimised for observing shiny surfaces



Further details ▶ page 83

KERN C-mount cameras

Your assistant for professional digital observations



Further details ▶ page 86

KERN eyepiece cameras

It's easy and in no time at all you're all ready for digital microscopy



Further details ▶ page 87

KERN WLAN microscope

NEW

Digital microscopy, easier than ever before. Direct, wireless transfer of the live image from the hand-held microscope to your tablet or smartphone.



Further details ▶ page 88

KERN Microscope VIS software

The perfect software for measuring, counting and documenting your samples



Further details ▶ page 89

Included with every KERN camera delivery

Digitale Refraktometer KERN ORF-Serie

NEW


Even more performance! IP65 protection, colour display, factory calibration and much more - all in the standard product!



Further details ▶ page 98

KERN Checklist for "My ideal microscope"


The clever helper when you are looking for the right microscope for your application

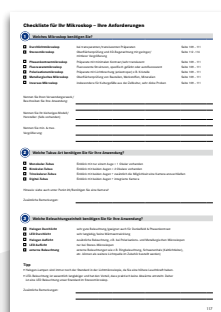

Further details ▶ page 108

KERN Blowout sale

Unbeatable offers/Everything must go. Buy products from our stock of discontinued models at significantly reduced prices.

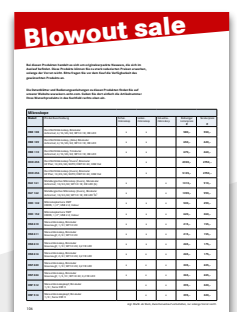

Further details ▶ page 106



WF10X/20

WF10X/20



Microscopes

1	Compound microscopes	08
	Compound, Phase contrast, Digital, Fluorescence and Inverted microscopes	
2	Metallurgical microscopes	30
3	Polarising microscopes	39
4	Stereomicroscopes	45
	Stereo, Stereo-Zoom, Coaxial and Gem microscopes	
5	Stereo microscope sets	71
6	Stereo microscope modular system	73
7	External light sources for stereomicroscopes	82
	Ring illumination and cold light sources	
8	Microscope cameras & Software	84

1 Compound microscopes

Compound, Phase contrast, Digital, Fluorescence and Inverted microscopes





Objectives OBS

01

EDUCATIONAL LINE

The school microscope – For the first steps in microscopy and for use in biology lessons

Features

- The KERN OBS range is a solid and simple school microscope range, which is easy to use due to its intuitive control elements
- The continuously dimmable 0.5W LED guarantees optimum illumination of the samples and also ensures long service life. Mobile use is also no problem through the use of rechargeable batteries
- The simple 0.65 condenser lens with rotating aperture diaphragm disc on the OBS 101 ensures the very best concentration of light and illumination of the sample. The OBS 104 and OBS 106 models have a 1.25 Abbe condenser which is height-adjustable and can therefore be focussed and has an aperture diaphragm, which ensures the very best concentration of light
- To focus the object, all models have a coarse and fine focusing knob on both sides. The mechanical stage enables you to work with the samples and move them rapidly (only for OBS 106)
- A large selection of different eyepieces and objectives is also available
- Please find detailed information in the following model outfit list

Scope of application

- Primary school, secondary school, training, hobby use

Applications/Samples

- Translucent, thin, high-contrast, less complex samples (e.g. plant tissue, coloured cells/parasites)

Technical data

- Finite optical system (DIN)
- Triple (OBS 101) or quadplex (OBS 104, OBS 106) nosepiece
- Tube 45° (OBS 101) or 30° (OBS 104, OBS 106) inclined/360° rotatable
- Diopter adjustment: Both-sided (for binocular models)
- Overall dimensions W×D×H 130×300×310 mm
- Net weight approx. 3 kg

STANDARD



OBS 104
OBS 106

Model	Standard configuration						
	Tube	Eyepiece	Objective quality	Objectives	Illumination	Stage	
OBS 101	Monocular	WF 10×/φ 18 mm	Achromatic	4×/10×/40×	0,5W LED (transmitted) (battery incl., rechargeable)	fix	
OBS 104	Binocular	WF 10×/φ 18 mm	Achromatic		0,5W LED (transmitted) (battery incl., rechargeable)	fix	↓
OBS 106	Binocular	WF 10×/φ 18 mm	Achromatic		0,5W LED (transmitted) (battery incl., rechargeable)	mechanical	↓

Compound microscope KERN OBS-1

Model outfit		Model KERN			Order number	
		OBS 101	OBS 104	OBS 106		
Eyepieces (23,2 mm)	WF 10×/∅ 18 mm	✓	✓✓	✓✓	OBB-A1473	
	WF 16×/∅ 13 mm	○	○○	○○	OBB-A1474	
	WF 20×/∅ 11 mm	○	○○	○○	OBB-A1475	
Achromatic objectives	4×/0,10 W.D. 18,0 mm	✓	✓	✓	OBB-A1476	
	10×/0,25 W.D. 7,0 mm	✓	✓	✓	OBB-A1477	
	40×/0,65 (spring) W.D. 0,53 mm	✓	✓	✓	OBB-A1478	
	60×/0,85 (spring) W.D. 0,1 mm	○	○	○	OBB-A1479	
	100×/1,25 (oil) (spring) W.D. 0,07 mm	○	○	○	OBB-A1480	
	E-Plan 100×/0,80 (dry) (spring) W.D. 0,15 mm	○	○	○	OBB-A1442	
	Plan 100×/1,0 (water) (spring) W.D. 0,18 mm	○	○	○	OBB-A1441	
Monocular tube	45° inclined/360° rotatable	✓			OBB-A1471	
Binocular tube	<ul style="list-style-type: none"> • 30° inclined/360° rotatable • Interpupillary distance 55-75 mm • Diopter adjustment: Both-sided 		✓	✓	OBB-A1472	
Fixed stage	<ul style="list-style-type: none"> • Stage size W×D 110×120 mm • Coaxial coarse and fine focusing knobs, scale: 2,5 µm 	✓	✓			
Mechanical stage	<ul style="list-style-type: none"> • Stage size W×D 115×125 mm • Travel 75×18 mm • Coaxial coarse and fine focusing knobs, scale: 2,5 µm 			✓		
Condenser	Simple condenser N.A. 0,65	✓				
	Abbe N.A. 1,25 (aperture diaphragm)		✓	✓		
Illumination	0,5 W LED illumination system (transmitted) (rechargeable)	✓	✓	✓		
Colour filters for transmitted illumination	Blue	✓	✓	✓	OBB-A1466	
	Green	○	○	○	OBB-A1467	
	Yellow	○	○	○	OBB-A1468	
	Gray	○	○	○	OBB-A1184	

✓ = Included with delivery

○ = Option



Trinocular version



Monocular version



Objectives OBE



Simple polarising unit



Darkfield unit

01

EDUCATIONAL LINE

The fully equipped all-round compound microscope for school, training and laboratories

Features

- The KERN OBE series is a range of high-quality, fully-equipped compound microscopes, which can't be beaten in terms of ease of use and ergonomic design
- The strong and continuously dimmable 3 W LED guarantees optimum illumination of the samples and also ensures long service life. Mobile use of several models is also no problem through the use of rechargeable batteries
- The height-adjustable and thereby focusable 1,25 Abbe condenser with aperture diaphragm is a further quality feature of the OBE series and ensures the very best concentration of light
- Height adjustment of the fully-equipped mechanical stage is carried out using a coarse and fine focusing knob on both

- sides. The ergonomically designed coaxial drive enables you to work with the samples and move them rapidly
- A large selection of different eyepieces and objectives, a simple polarising unit and a darkfield kit are available to you as accessories
- A protective dust cover, eye cups, as well as multi-lingual user instructions are included in the scope of the delivery
- A C-mount adapter is required to connect a camera to the trinocular version. You can select this adapter from the following model outfit list
- Please find detailed information in the following model outfit list

Scope of application

- Training, haematology, sediment investigation, doctor's practise


Applications/Samples

- Translucent, thin, high-contrast, less complex samples (e.g. plant tissue, coloured cells/parasites)

Technical data

- Finite optical system
- Quadplex nosepiece
- Siedentopf 30° inclined/360° rotatable
- Diopter adjustment: One-sided (for binocular and trinocular models)
- Overall dimensions WxDxH 320x180x365 mm
- Net weight approx. 5,5 kg

STANDARD



OPTION



Model	Standard configuration					
	Tube	Eyepiece	Objective quality	Objectives	Illumination	
KERN						
OBE 101	Monocular	HWF 10x/∅ 18 mm	Achromatic	4x/10x/40x	3 W LED (transmitted)	↓
OBE 102	Binocular	HWF 10x/∅ 18 mm	Achromatic		3 W LED (transmitted)	↓
OBE 103	Binocular	HWF 10x/∅ 18 mm	Achromatic		3 W LED (transmitted) (battery incl., rechargeable)	↓
OBE 104	Trinocular	HWF 10x/∅ 18 mm	Achromatic	4x/10x/40x/100x	3 W LED (transmitted)	↓
OBE 111	Monocular	HWF 10x/∅ 18 mm	Achromatic		3 W LED (transmitted)	
OBE 112	Binocular	HWF 10x/∅ 18 mm	Achromatic		3 W LED (transmitted)	↓
OBE 113	Binocular	HWF 10x/∅ 18 mm	Achromatic		3 W LED (transmitted) (battery incl., rechargeable)	↓
OBE 114	Trinocular	HWF 10x/∅ 18 mm	Achromatic		3 W LED (transmitted)	↓

↓ Price reduction

Model outfit		Model KERN				Order number	
		OBE 101	OBE 102	OBE 103	OBE 104		
Eyepieces (23,2 mm)	HWF 10×/∅ 18 mm	✓	✓✓	✓✓	✓✓	OBB-A1403	
	WF 16×/∅ 13 mm	○	○○	○○	○○	OBB-A1354	
	HWF 10×/∅ 18 mm (with Pointer)	○	○	○	○	OBB-A1348	
	HWF 10×/∅ 18 mm (reticule 0,1 mm) (non-adjustable)	○	○	○	○	OBB-A1349	
Achromatic objectives	4×/0,10 W.D. 18,6 mm	✓	✓	✓	✓	OBB-A1111	
	10×/0,25 W.D. 6,5 mm	✓	✓	✓	✓	OBB-A1108	
	40×/0,65 (spring) W.D. 0,47 mm	✓	✓	✓	✓	OBB-A1112	
	100×/1,25 (oil) (spring) W.D. 0,07 mm	○	○	○	○	OBB-A1109	
	20×/0,40 (spring) W.D. 1,75 mm	○	○	○	○	OBB-A1110	
	60×/0,85 (spring) W.D. 0,1 mm	○	○	○	○	OBB-A1113	
	E-Plan 100×/0,80 (dry) (spring) W.D. 0,15 mm	○	○	○	○	OBB-A1442	
	Plan 100×/1,0 (water) (spring) W.D. 0,18 mm	○	○	○	○	OBB-A1441	
Monocular tube	30° inclined/360° rotatable	✓				OBB-A1227	
Binocular tube	<ul style="list-style-type: none"> Siedentopf 30° inclined/360° rotatable Interpupillary distance 50 – 75 mm Diopter adjustment: One-sided 		✓	✓		OBB-A1123	
Trinocular tube	<ul style="list-style-type: none"> see binocular tube Light distribution 20:80 				✓	OBB-A1341	
Mechanical stage	<ul style="list-style-type: none"> Stage size W×D 125×115 mm Travel 50×70 mm Coaxial coarse and fine focusing knobs, scale: 2 µm 	✓	✓	✓	✓		
Condenser	Abbe N.A. 1,25 (aperture diaphragm)	✓	✓	✓	✓	OBB-A1101	
Darkfield unit	Usable for 4× – 40× objectives	○	○	○	○	OBB-A1148	
Polarising unit	Analyser/Polariser	○	○	○	○	OBB-A1276	
Illumination	3 W LED illumination system (transmitted) (non-rechargeable)	✓	✓		✓		
	3 W LED illumination system (transmitted) (rechargeable)			✓			
Colour filters for transmitted illumination	Blue	○	○	○	○	OBB-A1466	
	Green	○	○	○	○	OBB-A1467	
	Yellow	○	○	○	○	OBB-A1468	
	Gray	○	○	○	○	OBB-A1184	
C-Mount	0,5× (focus adjustable)				○	OBB-A1137	
	1×				○	OBB-A1139	

✓ = Included with delivery

○ = Option

Compound microscope KERN OBE-1

Model outfit		Model KERN				Order number	
		OBE 111	OBE 112	OBE 113	OBE 114		
Eyepieces (23,2 mm)	HWF 10×/∅ 18 mm	✓	✓✓	✓✓	✓✓	OBB-A1403	
	WF 16×/∅ 13 mm	○	○○	○○	○○	OBB-A1354	
	HWF 10×/∅ 18 mm (with Pointer)	○	○	○	○	OBB-A1348	
	HWF 10×/∅ 18 mm (reticule 0,1 mm) (non-adjustable)	○	○	○	○	OBB-A1349	
Achromatic objectives	4×/0,10 W.D. 18,6 mm	✓	✓	✓	✓	OBB-A1111	
	10×/0,25 W.D. 6,5 mm	✓	✓	✓	✓	OBB-A1108	
	40×/0,65 (spring) W.D. 0,47 mm	✓	✓	✓	✓	OBB-A1112	
	100×/1,25 (oil) (spring) W.D. 0,07 mm	✓	✓	✓	✓	OBB-A1109	
	20×/0,40 (spring) W.D. 1,75 mm	○	○	○	○	OBB-A1110	
	60×/0,85 (spring) W.D. 0,1 mm	○	○	○	○	OBB-A1113	
	E-Plan 100×/0,80 (dry) (spring) W.D. 0,15 mm	○	○	○	○	OBB-A1442	
	Plan 100×/1,0 (water) (spring) W.D. 0,18 mm	○	○	○	○	OBB-A1441	
Monocular tube	30° inclined/360° rotatable	✓				OBB-A1227	
Binocular tube	<ul style="list-style-type: none"> • Siedentopf 30° inclined/360° rotatable • Interpupillary distance 50 – 75 mm • Diopter adjustment: One-sided 		✓	✓		OBB-A1123	
Trinocular tube	<ul style="list-style-type: none"> • see binocular tube • Light distribution 20:80 				✓	OBB-A1341	
Mechanical stage	<ul style="list-style-type: none"> • Stage size W×D 125×115 mm • Travel 50×70 mm • Coaxial coarse and fine focusing knobs, scale: 2 µm 	✓	✓	✓	✓		
Condenser	Abbe N.A. 1,25 (aperture diaphragm)	✓	✓	✓	✓	OBB-A1101	
Darkfield unit	Usable for 4× – 40× objectives	○	○	○	○	OBB-A1148	
Polarising unit	Analyser/Polariser	○	○	○	○	OBB-A1276	
Illumination	3 W LED illumination system (transmitted) (non-rechargeable)	✓	✓		✓		
	3 W LED illumination system (transmitted) (rechargeable)			✓			
Colour filters for transmitted illumination	Blue	○	○	○	○	OBB-A1466	
	Green	○	○	○	○	OBB-A1467	
	Yellow	○	○	○	○	OBB-A1468	
	Gray	○	○	○	○	OBB-A1184	
C-Mount	0,5× (focus adjustable)				○	OBB-A1137	
	1×				○	OBB-A1139	

✓ = Included with delivery

○ = Option

01

01



Trinocular version



Simple polarising attachment

LAB LINE

The high-performance compound microscope for every laboratory with fixed, pre-centred Koehler illumination

Features

- The KERN OBF models are excellent, stable laboratory microscopes for all common routine applications. A central feature of this adaptable, robust microscope series is the stable mechanism which can be adjusted precisely
- Depending on the application, there is a choice of models with strong, continuously dimmable 3 W LED or 20 W halogen illumination (Philips)
- The fixed, pre-centred and focusable 1,25 Abbe condenser with aperture diaphragm and field diaphragm gives you a simplified Koehler illumination, without having to move the centre
- The large mechanical stage and its specimen holder holds up to two samples at the same time and is quick and easy to focus using a coaxial coarse and fine focusing knob on both sides
- A large selection of eyepieces, objectives and colour filters as well as a darkfield condenser and a simple polarising unit are available to you as accessories
- A protective dust cover, eye cups, as well as multi-lingual user instructions are included in the scope of delivery
- A C-mount adapter is required to connect a camera to the trinocular version. You can select this adapter from the following model outfit list
- Please find detailed information in the following model outfit list

Scope of application

- Haematology, urology, gynaecology, dermatology, pathology, microbiology and parasitology, immunology, oncology, entomology, vets, water analysis and breweries

Applications/Samples

- Translucent, thin, low-contrast, challenging samples (e.g. living mammal cells, bacteria, tissue)

Technical data

- Finite optical system (DIN)
- Quadplex nosepiece
- Siedentopf 30° inclined/360° rotatable
- Diopter adjustment: One-sided
- Overall dimensions W×D×H 395×200×380 mm
- Net weight approx. 6,7 kg

STANDARD



OPTION



Model	Standard configuration					
	Tube	Eyepiece	Objective quality	Objectives	Illumination	
KERN						
OBF 121	Binocular	HWF 10×/∅ 18 mm	Achromatic	4×/10×/40×/100×	6 V/20 W Halogen (transmitted)	↓
OBF 122	Binocular	HWF 10×/∅ 18 mm	Plan		6 V/20 W Halogen (transmitted)	↓
OBF 123	Binocular	HWF 10×/∅ 18 mm	Plan		3 W LED (transmitted)	↓
OBF 131	Trinocular	HWF 10×/∅ 18 mm	Achromatic		6 V/20 W Halogen (transmitted)	↓
OBF 132	Trinocular	HWF 10×/∅ 18 mm	Plan		6 V/20 W Halogen (transmitted)	↓
OBF 133	Trinocular	HWF 10×/∅ 18 mm	Plan		3 W LED (transmitted)	↓

↓ Price reduction

Model outfit		Model KERN						Order number	
		OBF 121	OBF 131	OBF 122	OBF 132	OBF 123	OBF 133		
Eyepieces (23,2 mm)	HWF 10×/∅ 18 mm	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	OBB-A1403	
	WF 16×/∅ 13 mm	○	○	○	○	○	○	OBB-A1354	
	HWF 10×/∅ 18 mm (with Pointer)	○	○	○	○	○	○	OBB-A1348	
	HWF 10×/∅ 18 mm (reticule 0,1 mm) (non-adjustable)	○	○	○	○	○	○	OBB-A1349	
Achromatic objectives	4×/0,10 W.D. 18,6 mm	✓	✓					OBB-A1111	
	10×/0,25 W.D. 6,5 mm	✓	✓					OBB-A1108	
	40×/0,65 (spring) W.D. 0,47 mm	✓	✓					OBB-A1112	
	100×/1,25 (oil) (spring) W.D. 0,07 mm	✓	✓					OBB-A1109	
	20×/0,40 (spring) W.D. 1,75 mm	○	○					OBB-A1110	
	60×/0,85 (spring) W.D. 0,1 mm	○	○					OBB-A1113	
Plan objectives	4×/0,10 W.D. 14,5 mm			✓	✓	✓	✓	OBB-A1255	
	10×/0,25 W.D. 5,65 mm			✓	✓	✓	✓	OBB-A1238	
	40×/0,65 (spring) W.D. 0,85 mm			✓	✓	✓	✓	OBB-A1256	
	100×/1,25 (oil) (spring) W.D. 0,07 mm			✓	✓	✓	✓	OBB-A1239	
	20×/0,40 (spring) W.D. 1,5 mm			○	○	○	○	OBB-A1249	
	60×/0,85 (spring) W.D. 0,07 mm			○	○	○	○	OBB-A1269	
	100×/1,0 (water) (spring) W.D. 0,18 mm	○	○	○	○	○	○	OBB-A1441	
Binocular tube	<ul style="list-style-type: none"> • Siedentopf 30° inclined/360° rotatable • Interpupillary distance 50 – 75 mm (for non-infinity system) • Diopter adjustment: One-sided 	✓	○	✓	○	✓	○	OBB-A1129	
Trinocular tube	<ul style="list-style-type: none"> • Siedentopf 30° inclined/360° rotatable • Interpupillary distance 50 – 75 mm • Light distribution 20:80 (for non-infinity system) • Diopter adjustment: One-sided 	○	✓	○	✓	○	✓	OBB-A1345	
Mechanical stage	<ul style="list-style-type: none"> • Stage size W×D 145×130 mm • Travel 76×52 mm • Coaxial coarse and fine focusing knobs, scale: 2 μm • Two slide holder 	✓	✓	✓	✓	✓	✓		
Condenser	Abbe N.A. 1,25 precentered (aperture diaphragm)	✓	✓	✓	✓	✓	✓	OBB-A1103	
Darkfield condenser	N.A. 0,85 – 0,91 (dry, paraboloid)	○	○	○	○	○	○	OBB-A1422	
Illumination	6 V/20 W Halogen spare bulb (transmitted)	✓	✓	✓	✓			OBB-A1370	
	3 W LED illumination system (transmitted) (non-rechargeable)					✓	✓		
Polarising unit	Analyser/Polariser	○	○	○	○	○	○	OBB-A1277	
Colour filters for transmitted illumination	Blue (built-in)	✓	✓	✓	✓	✓	✓		
	Green	○	○	○	○	○	○	OBB-A1188	
	Yellow	○	○	○	○	○	○	OBB-A1165	
	Gray	○	○	○	○	○	○	OBB-A1183	
C-Mount	0,47× (focus adjustable)		○		○		○	OBB-A1135	
	1×		○		○		○	OBB-A1142	

✓ = Included with delivery

○ = Option

01



Trinocular version



Simple polarising attachment

LAB LINE

The flexible laboratory assistant with infinity optical system and fixed, pre-centred Koehler illumination

Features

- The OBL series stands out through its infinity optical unit and is therefore ideally suited for all demanding transmitted illumination applications. The robust and ergonomic stand base guarantees safe and comfortable working
- Depending on the application, there is a choice of models with strong, continuously dimmable 3 W LED or 20 W halogen illumination (Philips)
- The fixed, pre-centred and focusable 1,25 Abbe condenser with aperture diaphragm and field diaphragm gives you a simplified Koehler illumination, without having to move the centre
- The large mechanical stage and its specimen holder holds up to two samples at the same time and is quick and easy to focus using a coaxial coarse and fine focusing knob on both sides
- A large selection of eyepieces, objectives and colour filters as well as a darkfield condenser, a simple polarising unit, different phase contrast kits through to HBO and LED fluorescence units are available to you as accessories
- A protective dust cover, eye cups, as well as multi-lingual user instructions are included in the scope of delivery
- A C-mount adapter is required to connect a camera to the trinocular version. You can select this adapter from the following model outfit list
- Please find detailed information in the following model outfit list

Scope of application

- Haematology, urology, gynaecology, dermatology, pathology, microbiology and parasitology, immunology, oncology, entomology, vets, water analysis and breweries

Applications/Samples

- Translucent, thin, low-contrast, challenging samples (e.g. living mammal cells, bacteria, tissue)


Technical data

- Infinity optical system
- Quadplex nosepiece
- Siedentopf 30° inclined/360° rotatable
- Diopter adjustment: One-sided
- Overall dimensions W×D×H 395×200×380 mm
- Net weight approx. 6,7 kg

STANDARD



OPTION



Model	Standard configuration					
	Tube	Eyepiece	Objective quality	Objectives	Illumination	
KERN						
OBL 125	Binocular	HWF 10×/∅ 20 mm	Infinity E-Plan	4×/10×/40×/100×	6 V/20 W Halogen (transmitted)	↓
OBL 127	Binocular	HWF 10×/∅ 20 mm	Infinity E-Plan		3 W LED (transmitted)	↓
OBL 135	Trinocular	HWF 10×/∅ 20 mm	Infinity E-Plan		6 V/20 W Halogen (transmitted)	↓
OBL 137	Trinocular	HWF 10×/∅ 20 mm	Infinity E-Plan		3 W LED (transmitted)	↓

↓ Price reduction

Model outfit		Model KERN				Order number	
		OBL 125	OBL 135	OBL 127	OBL 137		
Eyepieces (23,2 mm)	HWF 10×/∅ 20 mm	✓✓	✓✓	✓✓	✓✓	OBB-A1404	
	WF 16×/∅ 13 mm	○○	○○	○○	○○	OBB-A1354	
	HWF 10×/∅ 20 mm (with Pointer)	○	○	○	○	OBB-A1448	
Infinity E-Plan objectives	4×/0,10 W.D. 12,1 mm	✓	✓	✓	✓	OBB-A1161	
	10×/0,25 W.D. 2,1 mm	✓	✓	✓	✓	OBB-A1159	
	40×/0,65 (spring) W.D. 0,58 mm	✓	✓	✓	✓	OBB-A1160	
	100×/1,25 (oil) (spring) W.D. 0,19 mm	✓	✓	✓	✓	OBB-A1158	
	Plan 20×/0,40 (spring) W.D. 2,41 mm	○	○	○	○	OBB-A1250	
	Plan 60×/0,80 (spring) W.D. 0,33 mm	○	○	○	○	OBB-A1270	
	Plan 100×/1,15 (water) (spring) W.D. 0,18 mm	○	○	○	○	OBB-A1437	
Binocular tube	<ul style="list-style-type: none"> • Siedentopf 30° inclined/360° rotatable • Interpupillary distance 50 – 75 mm (for infinity system) • Diopter adjustment: One-sided 	✓	○	✓	○	OBB-A1130	
Trinocular tube	<ul style="list-style-type: none"> • Siedentopf 30° inclined/360° rotatable • Interpupillary distance 50 – 75 mm • Light distribution 20:80 (for infinity system) • Diopter adjustment: One-sided 	○	✓	○		OBB-A1346	
					✓	OBB-A1549	
Mechanical stage	<ul style="list-style-type: none"> • Stage size W×D 145×130 mm • Travel 76×52 mm • Coaxial coarse and fine focusing knobs, scale: 2 µm • Two slide holder 	✓	✓	✓	✓		
Condenser	Abbe N.A. 1,25 precentered (aperture diaphragm)	✓	✓	✓	✓	OBB-A1103	
Darkfield condenser	N.A. 0,85 – 0,91 (dry, paraboloid)	○	○	○	○	OBB-A1422	
Illumination	6 V/20 W Halogen spare bulb (transmitted)	✓	✓			OBB-A1370	
	3 W LED illumination system (transmitted) (non-rechargeable)			✓	✓		
Polarising unit	Analyser/Polariser	○	○	○	○	OBB-A1277	
Phase contrast units (including PH-condenser and PH-slides)	Single unit with ∞ PH-Plan objective 10×	○	○	○	○	OBB-A1215	
	Single unit with ∞ PH-Plan objective 20×	○	○	○	○	OBB-A1217	
	Single unit with ∞ PH-Plan objective 40×	○	○	○	○	OBB-A1219	
	Single unit with ∞ PH-Plan objective 100×	○	○	○	○	OBB-A1213	
	When several magnification levels are required, please contact us						
Fluorescence unit	100 W HBO Epi Fluorescence unit, three-hole slide (B/G) including centering objective	○	○	○	○	OBB-A1154	
	3 W LED Epi Fluorescence unit, three-hole slide (B/G) including centering objective	○	○	○	○	OBB-A1157	
Colour filters for transmitted illumination	Blue (built-in)	✓	✓	✓	✓		
	Green	○	○	○	○	OBB-A1188	
	Yellow	○	○	○	○	OBB-A1165	
	Gray	○	○	○	○	OBB-A1183	
C-Mount	0,47× (focus adjustable)	○	○	○		OBB-A1135	
	0,5× (focus adjustable)				○	OBB-A1515	
	1×	○	○	○		OBB-A1142	
					○	OBB-A1514	

✓ = Included with delivery

○ = Option

01



Mounted phase contrast condenser



Simple PH condenser with 40× PH slide

LAB LINE

High-quality phase contrast microscope – specially pre-configured with a series of options for flexible expansion

Features

- We have developed this series specially for general applications with phase contrast method. In addition, the stable, modular construction system of the OBL series offers many more options
- A strong and continuously adjustable 20 W halogen illumination unit (Philips) ensures the optimum lighting conditions
- A special fixed, pre-centred phase contrast condenser with aperture diaphragm as well as field diaphragm give you a simplified Koehler illumination and thereby a powerful phase-contrast display of your sample
- The large mechanical stage and its specimen holder holds up to two samples at the same time and is quick and easy to focus using a coaxial coarse and fine focusing knob on both sides
- A large selection of eyepieces, objectives and colour filters, a simple polarising unit as well as further phase contrast units are available to you as accessories
- A protective dust cover, eye cups, as well as multi-lingual user instructions are included in the scope of delivery
- A C-mount adapter is required to connect a camera to the trinocular version. You can select this adapter from the following model outfit list
- Please find detailed information in the following model outfit list

Scope of application

- Haematology, urology, gynaecology, dermatology, pathology, microbiology and parasitology, immunology, Sewage treatment plants, Oncology, entomology, vets, water analysis and breweries

Applications/Samples

- Specially for extremely translucent, thin, low-contrast, challenging samples (e.g. living mammal cells, bacteria, tissue) with phase contrast

Technical data

- Infinity optical system
- Quadplex nosepiece
- Siedentopf 30° inclined/360° rotatable
- Diopter adjustment: One-sided
- Overall dimensions W×D×H 395×200×380 mm
- Net weight approx. 6,7 kg

STANDARD



OPTION



Model	Standard configuration					
	Tube	Eyepiece	Objective quality	Objectives	Illumination	
KERN						
OBL 145	Binocular	HWF 10×/ø 20 mm	Infinity E-Plan/Plan	4×/PH10×/PH40×/100×	6 V/20 W Halogen (transmitted)	↓
OBL 155	Trinocular	HWF 10×/ø 20 mm	Infinity E-Plan/Plan		6 V/20 W Halogen (transmitted)	↓

↓ Price reduction

Model outfit		Model KERN		Order number	
		OBL 145	OBL 155		
Eyepieces (23,2 mm)	HWF 10×/∅ 20 mm	✓✓	✓✓	OBB-A1404	
	WF 16×/∅ 13 mm	○○	○○	OBB-A1354	
	HWF 10×/∅ 20 mm (with Pointer)	○	○	OBB-A1448	
Infinity E-Plan objectives	4×/0,10 W.D. 12,1 mm	✓	✓	OBB-A1161	
	10×/0,25 W.D. 2,1 mm	○	○	OBB-A1159	
	40×/0,65 (spring) W.D. 0,58 mm	○	○	OBB-A1160	
	100×/1,25 (oil) (spring) W.D. 0,19 mm	✓	✓	OBB-A1158	
	Plan 20×/0,40 (spring) W.D. 2,41 mm	○	○	OBB-A1250	
	Plan 60×/0,80 (spring) W.D. 0,33 mm	○	○	OBB-A1270	
	Plan 100×/1,15 (water) (spring) W.D. 0,18 mm	○	○	OBB-A1437	
Binocular tube	<ul style="list-style-type: none"> • Siedentopf 30° inclined/360° rotatable • Interpupillary distance 50 – 75 mm (for infinity system) • Diopter adjustment: One-sided 	✓	○	OBB-A1130	
Trinocular tube	<ul style="list-style-type: none"> • Siedentopf 30° inclined/360° rotatable • Interpupillary distance 50 – 75 mm • Light distribution 20:80 (for infinity system) • Diopter adjustment: One-sided 	○	✓	OBB-A1549	
Mechanical stage	<ul style="list-style-type: none"> • Stage size W×D 145×130 mm • Travel 76×52 mm • Coaxial coarse and fine focusing knobs, scale: 2 μm • Two slide holder 	✓	✓		
PH condenser	Abbe N.A. 1,25 precentered, for bright field and phase contrast	✓	✓	OBB-A1398	
Phase contrast units	Infinity PH-Plan objective 10×	✓	✓	OBB-A1390	
	Infinity PH-Plan objective 20×	○	○	OBB-A1391	
	Infinity PH-Plan objective 40×	✓	✓	OBB-A1392	
	Infinity PH-Plan objective 100×	○	○	OBB-A1393	
	PH slide 10×	✓	✓	OBB-A1399	
	PH slide 20×	○	○	OBB-A1400	
	PH slide 40×	✓	✓	OBB-A1401	
	PH slide 100×	○	○	OBB-A1402	
	Centering eyepiece	✓	✓		
Darkfield condenser	N.A. 0,85 – 0,91 (dry, paraboloid)	○	○	OBB-A1422	
Illumination	6 V/20 W Halogen spare bulb (transmitted)	✓	✓	OBB-A1370	
Colour filters for transmitted illumination	Blue (built-in)	✓	✓		
	Green	✓	✓	OBB-A1188	
	Yellow	○	○	OBB-A1165	
	Gray	○	○	OBB-A1183	
C-Mount	0,5× (focus adjustable)		○	OBB-A1515	
	1×		○	OBB-A1514	

For further optional accessories, please see the list of items for the OBL-12 and OBL-13 series from page 17

✓ = Included with delivery

○ = Option



Easy connection to the PC, Laptop not included in delivery. Please find the description of the software in chapter 8 (p. 93)

LAB LINE

The digital all-round talent for your applications, documentation and live transmissions through an integrated camera

Features

- The KERN OBD is an excellent, stable laboratory microscope with integrated camera and infinity optical system, based on the OBL series
- A strong and continuously adjustable 20 W halogen illumination unit (Philips) ensures the optimum lighting conditions
- The fixed, pre-centred and focusable 1,25 Abbe condenser with aperture diaphragm and field diaphragm gives you a simplified Koehler illumination, without having to move the centre
- The large mechanical stage and its specimen holder holds up to two samples at the same time and is quick and easy to focus using a coaxial coarse and fine focusing knob on both sides

- A large selection of eyepieces, objectives and colour filters, a simple polarising unit as well as phase contrast units are available to you as accessories
- Multi-lingual software, USB cable, calibration scale as well as a protective dust cover, eye cups and multi-lingual user instructions are included in the scope of delivery
- Please find detailed information in the following model outfit list

Scope of application

- Haematology, urology, gynaecology, dermatology, pathology, microbiology and parasitology, immunology, Sewage treatment plants, Oncology, entomology, vets, water analysis and breweries, if necessary, for training where there will be lots of people observing the screen/beamer at the same time

Applications/Samples

- Translucent, thin, low-contrast, challenging samples (e.g. living mammal cells, bacteria, tissue)


Technical data

- Infinity optical system
- Quadplex nosepiece
- Siedentopf 30° inclined/360° rotatable
- Diopter adjustment: One-sided
- Overall dimensions W×D×H
395×200×430 mm
- Net weight approx. 7 kg

STANDARD



OPTION



Model	Standard configuration					
	Tube	Eyepiece	Objective quality	Objectives	Illumination	
KERN						
OBD 127	Binocular/3MP digital/USB 2.0	HWF 10×/ø 20 mm	Infinity E-Plan	4×/10×/40×/100×	6 V/20 W Halogen (transmitted)	↓
OBD 128	Binocular/5MP digital/USB 2.0	HWF 10×/ø 20 mm	Infinity E-Plan		6 V/20 W Halogen (transmitted)	↓

↓ Price reduction

Compound microscope KERN OBD-1

Model outfit		Model KERN		Order number	
		OBD 127	OBD 128		
Eyepieces (23,2 mm)	HWF 10×/∅ 20 mm	✓✓	✓✓	OBB-A1404	
	WF 16×/∅ 13 mm	○○	○○	OBB-A1354	
	HWF 10×/∅ 20 mm (with Pointer)	○	○	OBB-A1448	
Infinity E-Plan objectives	4×/0,10 W.D. 12,1 mm	✓	✓	OBB-A1161	
	10×/0,25 W.D. 2,1 mm	✓	✓	OBB-A1159	
	40×/0,65 (spring) W.D. 0,58 mm	✓	✓	OBB-A1160	
	100×/1,25 (oil) (spring) W.D. 0,19 mm	✓	✓	OBB-A1158	
	Plan 20×/0,40 (spring) W.D. 2,41 mm	○	○	OBB-A1250	
	Plan 60×/0,80 (spring) W.D. 0,33 mm	○	○	OBB-A1270	
	Plan 100×/1,15 (water) (spring) W.D. 0,18 mm	○	○	OBB-A1437	
Digital tube Trinocular (3MP)	<ul style="list-style-type: none"> • 30° inclined/360° rotatable • Interpupillary distance 50 – 75 mm • Diopter adjustment: One-sided • Light distribution 80:20 • Built-in digital 3MP Camera with ½" CMOS • USB port for PC without extra power supply • With multilingual (DE, EN, FR, IT, ES) software "Microscope VIS" for Windows XP, Vista, 7, 8, 10 	✓		OBB-A1126	
Digital tube Trinocular (5MP)	<ul style="list-style-type: none"> • 30° inclined/360° rotatable • Interpupillary distance 50 – 75 mm • Diopter adjustment: One-sided • Light distribution 80:20 • Built-in digital 5 MP Camera with ½,5" CMOS • USB port for PC without extra power supply • With multilingual (DE, EN, FR, IT, ES) software "Microscope VIS" for Windows XP, Vista, 7, 8, 10 		✓	OBB-A1127	
Object micrometer	For calibrating the software measuring function, 0.01 mm division	✓	✓	OBB-A1224	
Mechanical stage	<ul style="list-style-type: none"> • Stage size W×D 145×130 mm • Travel 76×52 mm • Two slide holder • Coaxial coarse and fine focusing knobs, scale: 2 µm 	✓	✓		
Condenser	Abbe N.A. 1,25 precentered (aperture diaphragm)	✓	✓	OBB-A1103	
Darkfield condenser	N.A. 0,85 – 0,91 (dry, paraboloid)	○	○	OBB-A1422	
Illumination	6 V/20 W Halogen spare bulb (transmitted)	✓	✓	OBB-A1370	
Polarising unit	Analyser/Polariser	○	○	OBB-A1277	
Phase contrast units (including PH-condenser and PH-slides)	Single unit with ∞ PH-Plan objective 10×	○	○	OBB-A1215	
	Single unit with ∞ PH-Plan objective 20×	○	○	OBB-A1217	
	Single unit with ∞ PH-Plan objective 40×	○	○	OBB-A1219	
	Single unit with ∞ PH-Plan objective 100×	○	○	OBB-A1213	
	When several magnification levels are required, please contact us				
Colour filters for transmitted illumination	Blue (built-in)	✓	✓		
	Green	○	○	OBB-A1188	
	Yellow	○	○	OBB-A1165	
	Gray	○	○	OBB-A1183	

✓ = Included with delivery

○ = Option

01

01



Abbe condenser center-adjustable, also available with swing-out lens



Butterfly Tube (optionally available)

PROFESSIONAL LINE

Professionalism and versatility united in one microscope – with Koehler illumination for demanding applications

Features

- The OBN series stands out because of its unbeatable and consistently high quality and its ergonomic design. The range of modular components means that the OBN series can be individually customised for the professional user
- Depending on the application, there is a choice of models with strong, continuously dimmable 3 W LED or 20 W halogen transmitted illumination (Philips)
- This series has a professional Koehler illumination unit with an adjustable field diaphragm as well as a height-adjustable 1,25 Abbe condenser which can be centred and which has an adjustable aperture diaphragm
- The extremely large mechanical stage with ergonomic, coaxial coarse and fine focusing knob on both sides enables you to adjust and focus your sample rapidly and accurately
- A wide variety of modular systems, such as, for example, a swing-out condenser, various eyepieces, objectives, colour filters, phase contrast units, a darkfield condenser, a simple polarising unit, Butterfly Tube, through to complete fluorescence units are available to you as accessories
- A protective dust cover, eye cups, as well as multi-lingual user instructions are included in the scope of delivery
- A C-mount adapter is required to connect a camera. You can select this adapter from the following model outfit list
- Please find detailed information in the following model outfit list

Scope of application

- Haematology, urology, gynaecology, dermatology, pathology, microbiology and parasitology, immunology, Sewage treatment plants, Oncology, entomology, vets, water analysis and breweries

Applications/Samples

- Translucent, thin, low-contrast, challenging samples (e.g. living mammal cells, bacteria, tissue)


Technical data

- Infinity optical system
- Quintuple nosepiece
- Siedentopf 30° inclined/360° rotatable
- Diopter adjustment: Both-sided
- Overall dimensions W×D×H 390×200×400 mm
- Net weight approx. 9 kg

STANDARD



OPTION



Model	Standard configuration					
	Tube	Eyepiece	Objective quality	Objectives	Illumination	
KERN						
OBN 132	Trinocular	HWF 10×/ø 20 mm	Infinity Plan	4×/ 10×/20×/	6 V/20 W Halogen (transmitted)	↓
OBN 135	Trinocular	HWF 10×/ø 20 mm	Infinity Plan	40×/ 100×	3 W LED (transmitted)	↓

↓ Price reduction

Model outfit		Model KERN		Order number	
		OBN 132	OBN 135		
Eyepieces (23,2 mm)	HWF 10×/∅ 20 mm	✓✓	✓✓	OBB-A1404	
	WF 16×/∅ 13 mm	○○	○○	OBB-A1354	
Infinity Plan achromatic objectives	4×/0,10 W.D. 12,1 mm	✓	✓	OBB-A1263	
	10×/0,25 W.D. 4,64 mm	✓	✓	OBB-A1243	
	20×/0,40 (spring) W.D. 2,41 mm	✓	✓	OBB-A1250	
	40×/0,66 (spring) W.D. 0,65 mm	✓	✓	OBB-A1257	
	100×/1,25 (oil) (spring) W.D. 0,19 mm	✓	✓	OBB-A1240	
	2,5×/0,07 W.D. 8,47 mm	○	○	OBB-A1247	
	Plan 60×/0,80 (spring) W.D. 0,33 mm	○	○	OBB-A1270	
	Plan 100×/1,15 (water) (spring) W.D. 0,18 mm	○	○	OBB-A1437	
Trinocular tube	<ul style="list-style-type: none"> • Siedentopf 30° inclined/360° rotatable • Interpupillary distance 50 – 75 mm • Light distribution 100:0 • Diopter adjustment: Both-sided 	✓	✓		
	<ul style="list-style-type: none"> • Butterfly 30° inclined/360° rotatable • Interpupillary distance 50 – 75 mm • Light distribution 100:0 • Diopter adjustment: Both-sided 	○	○	OBB-A1382	
Mechanical stage	<ul style="list-style-type: none"> • Stage size W×D 175×145 mm • Travel 78×55 mm • Coaxial coarse and fine focusing knobs • Two slide holder 	✓	✓		
Condenser	Abbe N.A. 1,25 center-adjustable (aperture diaphragm)	✓	✓	OBB-A1102	
	Swing-out condenser N.A. 0,9/0,13 center-adjustable (aperture diaphragm)	○	○	OBB-A1104	
Darkfield condenser	N.A. 0,85 – 0,91 (dry, paraboloid)	○	○	OBB-A1421	
Koehler illumination	6 V/20 W Halogen spare bulb (transmitted)	✓		OBB-A1370	
	3 W LED illumination system (transmitted) (non-rechargeable)		✓		
Polarising unit	Analyser/Polariser	○	○	OBB-A1283	
Phase contrast units	Quintuple hole turret with 10×/20×/40×/100× Infinity-PH-Plan objectives (complete set)	○	○	OBB-A1237	
	Single unit with ∞ PH-Plan objective 10×	○	○	OBB-A1214	
	Single unit with ∞ PH-Plan objective 20×	○	○	OBB-A1216	
	Single unit with ∞ PH-Plan objective 40×	○	○	OBB-A1218	
	Single unit with ∞ PH-Plan objective 100×	○	○	OBB-A1212	
	When several magnification levels are required, please contact us				
C-Mount	1×	○	○	OBB-A1140	
	0,57× (focus adjustable)	○	○	OBB-A1136	
Fluorescence unit	100 W HBO Epi Fluorescence unit 6-filter disc (UV/V/B/G) including centering objective	○	○	OBB-A1155	
	100 W HBO Epi Fluorescence unit, two-hole slide (B/G) including centering objective	○	○	OBB-A1153	
	3 W LED Epi Fluorescence unit (B/G) including centering objective	○	○	OBB-A1156	
Colour filters for transmitted illumination	Blue	✓			
	Green	○	○	OBB-A1188	
	Yellow	○	○	OBB-A1165	
	Gray	○	○	OBB-A1183	

✓ = Included with delivery

○ = Option

01



Mounted phase contrast condenser



Quintuple PH universal rotary condenser with 10×/20×/40×/100× Infinity PH-Plan objectives (complete set)

PROFESSIONAL LINE

The powerful, fully-equipped phase contrast microscope with varied options

Features

- This series stands out through its wide-ranging phase-contrast feature which goes beyond the standard OBN level of quality
- A strong and continuously adjustable 20 W halogen transmitted illumination unit (Philips) ensures the optimum illumination of your samples
- This series has a professional Koehler illumination unit with a special height-adjustable PH universal rotary condenser which can be centred as well as an aperture diaphragm and field diaphragm
- The extremely large mechanical stage with ergonomic, coaxial coarse and fine focusing knob on both sides enables you to adjust and focus your sample rapidly and accurately
- The combination of a professional quintuple condenser wheel, the phase contrast condenser and the Infinity Plan phase contrast objectives makes the KERN OBN 158 a high-quality, fully-equipped microscope for all applications related to contrast procedures
- A wide variety of modular systems, such as, for example, a swing-out condenser, various eyepieces, objectives, colour filters, a darkfield condenser, a simple polarising unit, Butterfly Tube, through to complete fluorescence units are available to you as accessories
- This centring eyepiece for adjusting the phase contrast, a protective dust cover, eye cups as well as multi-lingual user instructions are included in the scope of delivery
- A C-mount adapter is required to connect a camera. You can select this adapter from the following model outfit list
- Please find detailed information in the following model outfit list

Scope of application

- Haematology, urology, gynaecology, dermatology, pathology, microbiology and parasitology, immunology, Sewage treatment plants, Oncology, entomology, vets, water analysis and breweries

Applications/Samples

- Specially for extremely translucent, thin, low-contrast, challenging samples (e.g. living mammal cells, bacteria, tissue) with phase contrast


Technical data

- Infinity optical system
- Quintuple nosepiece
- Siedentopf 30° inclined/360° rotatable
- Diopter adjustment: Both-sided
- Overall dimensions W×D×H 390×200×400 mm
- Net weight approx. 9 kg

STANDARD



OPTION



Model	Standard configuration					
	Tube	Eyepiece	Objective quality	Objectives	Illumination	
KERN						
OBN 158	Trinocular	HWF 10×/ø 20 mm	Infinity Plan	4×/PH10×/PH20×/PH40×/PH100×	6 V/20 W Halogen (transmitted)	↓

↓ Price reduction

Phase contrast microscope KERN OBN-15

Model outfit		Model KERN	Order number	
		OBN 158		
Eyepieces (23,2 mm)	HWF 10×/∅ 20 mm	✓✓	OBB-A1404	
	WF 16×/∅ 13 mm	○○	OBB-A1354	
Infinity Plan achromatic objectives	4×/0,10 W.D. 12,1 mm	✓	OBB-A1263	
	10×/0,25 W.D. 4,64 mm	○	OBB-A1243	
	20×/0,40 (spring) W.D. 2,41 mm	○	OBB-A1250	
	40×/0,66 (spring) W.D. 0,65 mm	○	OBB-A1257	
	100×/1,25 (oil) (spring) W.D. 0,19 mm	○	OBB-A1240	
	2,5×/0,07 W.D. 8,47 mm	○	OBB-A1247	
	Plan 60×/0,80 (spring) W.D. 0,33 mm	○	OBB-A1270	
Trinocular tube	<ul style="list-style-type: none"> • Siedentopf 30° inclined/360° rotatable • Interpupillary distance 50 – 75 mm • Light distribution 100:0 • Diopter adjustment: Both-sided 	✓		
	<ul style="list-style-type: none"> • Butterfly 30° inclined/360° rotatable • Interpupillary distance 50 – 75 mm • Light distribution 100:0 • Diopter adjustment: Both-sided 	○	OBB-A1382	
Mechanical stage	<ul style="list-style-type: none"> • Stage size W×D 175×145 mm • Travel 78×55 mm • Coaxial coarse and fine focusing knobs • Two slide holder 	✓		
PH condenser	Universal rotary condenser for bright field and phase contrast suitable for 10×/20×/40×/100× PH objectives center-adjustable PH ring units; with aperture diaphragm	✓		
Phase contrast units	Infinity PH-Plan objective 10×	✓	OBB-A1390	
	Infinity PH-Plan objective 20×	✓	OBB-A1391	
	Infinity PH-Plan objective 40×	✓	OBB-A1392	
	Infinity PH-Plan objective 100×	✓	OBB-A1393	
	Centering eyepiece	✓		
Darkfield condenser	N.A. 0,85 – 0,91 (dry, paraboloid)	○	OBB-A1421	
Koehler illumination	6 V/20 W Halogen spare bulb (transmitted)	✓	OBB-A1370	
Colour filters for transmitted illumination	Blue	○	OBB-A1170	
	Green	✓		
	Yellow	○	OBB-A1165	
	Gray	○	OBB-A1183	
C-Mount	1×	○	OBB-A1140	
	0,57× (focus adjustable)	○	OBB-A1136	

For further optional accessories, please see the list of items for the OBN-13 series from page 23

✓ = Included with delivery

○ = Option


01



OBN 141/OBN 147



Illumination unit

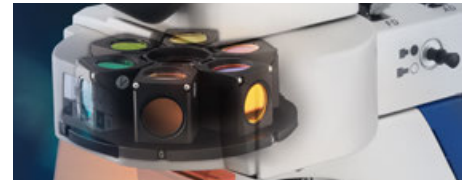

Sextuple filter wheel OBN 148

PROFESSIONAL LINE

The fluorescence microscope for the professional user

Features

- The fluorescence microscope in the OBN-14 series is based on the usual high quality and versatility of the OBN series. The outstanding, stable design in combination with high-quality optics set the standard in fluorescence microscopy in this class
- The powerful, dimmable 20W halogen illumination unit (Philips) and a 100W Epi fluorescence incident illumination unit on the OBN 147/OBN 148 models ensure perfect illumination and stimulation of your fluorescence samples
- As an alternative, with the OBN 141 model we can offer you a fluorescence microscope with a 3W LED transmitted illumination unit and 3W LED Epi fluorescence incident illumination unit
- This series has a professional Koehler illumination unit with an adjustable field diaphragm as well as a height-adjustable 1,25 Abbe condenser which can be centred and which has an adjustable aperture diaphragm
- The extremely large mechanical stage with ergonomic, coaxial coarse and fine focusing knob on both sides enables you to adjust and focus your sample rapidly and accurately
- With the OBN 147/OBN 148 halogen variant you have a filter wheel which has up to 6 fittings. As standard this is fitted with a B/G or B/G/UV/V fluorescence filter. The OBN 141 LED variant is fitted with a B/G fluorescence filter with a changeover slider as standard. The changeover slider and the filter wheel mean that you can change the stimulation filter quickly
- A large selection of eyepieces, objectives, colour filters, darkfield condensers as well as a Butterfly Tube, polarising and phase contrast units can easily be integrated thanks to the modular construction system
- The centring objective for adjusting the fluorescence, a protective dust cover, eye cups as well as multi-lingual user instructions are included in the scope of delivery
- A C-mount adapter is required to connect a camera. You can select this adapter from the following model outfit list
- Please find detailed information in the following model outfit list

Scope of application

- Haematology, urology, gynaecology, dermatology, pathology, microbiology and parasitology, immunology, Sewage treatment plants, Oncology, entomology, vets, water analysis and breweries

Applications/Samples

- Specially for translucent, thin, low-contrast, challenging samples (e.g. Immunofluorescence, FISH, DAPI staining, etc.)


Technical data

- Infinity optical system
- Quintuple nosepiece
- Siedentopf 30° inclined/360° rotatable
- Diopter adjustment: Both-sided
- Overall dimensions WxDxH 530x220x490 mm
- Net weight approx. 23 kg

STANDARD



OPTION



Model	Standard configuration					
	Tube	Eyepiece	Objective quality	Objectives	Illumination	
KERN						
OBN 141 <small>NEW</small>	Trinocular	WF 10x/φ 20 mm	Infinity Plan	4x/10x/20x/ 40x/100x	LED + 3 W LED Epi Fluorescence (B/G)	
OBN 147	Trinocular	WF 10x/φ 20 mm	Infinity Plan		Halogen + 100 W Epi Fluorescence (B/G)	↓
OBN 148	Trinocular	WF 10x/φ 20 mm	Infinity Plan		Halogen + 100 W Epi Fluorescence (B/G/UV/V)	↓

NEW ↓

Fluorescence microscope KERN OBN-14

Model outfit		Model KERN			Order number	
		OBN 141	OBN 147	OBN 148		
Eyepieces (23,2 mm)	WF 10×/∅ 20 mm	✓✓	✓✓	✓✓	OBB-A1351	
	WF 16×/∅ 13 mm	○○	○○	○○	OBB-A1354	
	WF 10×/∅ 20 mm (reticule 0,1 mm) (adjustable)	○	○	○	OBB-A1352	
Infinity Plan achromatic objectives	4×/0,10 W.D. 12,1 mm	✓	✓	✓	OBB-A1263	
	10×/0,25 W.D. 4,64 mm	✓	✓	✓	OBB-A1243	
	20×/0,40 (spring) W.D. 2,41 mm	✓	✓	✓	OBB-A1250	
	40×/0,66 (spring) W.D. 0,65 mm	✓	✓	✓	OBB-A1257	
	100×/1,25 (oil) (spring) W.D. 0,19 mm	✓	✓	✓	OBB-A1240	
	2,5×/0,07 W.D. 8,47 mm	○	○	○	OBB-A1247	
	Plan 60×/0,80 (spring) W.D. 0,33 mm	○	○	○	OBB-A1270	
Trinocular tube	<ul style="list-style-type: none"> • Siedentopf 30° inclined/360° rotatable • Interpupillary distance 50 – 75 mm • Light distribution 100:0 • Diopter adjustment: Both-sided 	✓	✓	✓		
	<ul style="list-style-type: none"> • Butterfly 30° inclined/360° rotatable • Interpupillary distance 50 – 75 mm • Light distribution 100:0 • Diopter adjustment: Both-sided 	○	○	○	OBB-A1382	
Mechanical stage	<ul style="list-style-type: none"> • Stage size W×D 175×145 mm • Travel 78×55 mm • Coaxial coarse and fine focusing knobs • Two slide holder 	✓	✓	✓		
Condenser	Abbe N.A. 1,25 center-adjustable (aperture diaphragm)	✓	✓	✓	OBB-A1102	
	Swing-out condenser N.A. 0,9/0,13 center-adjustable (aperture diaphragm)	○	○	○	OBB-A1104	
Darkfield condenser	N.A. 0,85 – 0,91 (dry, paraboloid)	○	○	○	OBB-A1421	
Koehler illumination	6 V/20 W Halogen spare bulb (transmitted)	✓	✓	✓	OBB-A1370	
Polarising unit	Analyser/Polariser	○	○	○	OBB-A1283	
Phase contrast units	Quintuple hole turret with 10×/20×/40×/100× Infinity-PH-Plan objectives (complete set)	○	○	○	OBB-A1237	
	Single unit with ∞ PH-Plan objective 10×	○	○	○	OBB-A1214	
	Single unit with ∞ PH-Plan objective 20×	○	○	○	OBB-A1216	
	Single unit with ∞ PH-Plan objective 40×	○	○	○	OBB-A1218	
	Single unit with ∞ PH-Plan objective 100×	○	○	○	OBB-A1212	
When several magnification levels are required, please contact us						
C-Mount	1×	○	○	○	OBB-A1140	
	0,57× (focus adjustable)	○	○	○	OBB-A1136	
Fluorescence unit	100 W HBO Epi Fluorescence unit 6-filter disc (UV/V/B/G) including centering objective			✓		
	100 W HBO Epi Fluorescence unit, two-hole slide (B/G) including centering objective		✓			
	3 W LED Epi Fluorescence unit (B/G) including centering objective	✓				
Colour filters for transmitted illumination	Blue	✓	✓	✓		
	Green	○	○	○	OBB-A1188	
	Yellow	○	○	○	OBB-A1165	
	Gray	○	○	○	OBB-A1183	

✓ = Included with delivery

○ = Option

01



N. A. 0,3 Abbe Condenser with phase contrast slide



Coaxial control knobs for x/y can be fitted either left or right

LAB LINE

The inverted biological laboratory microscope – also with fluorescence

Features

- The OCM range stands out through its design which is ergonomic, robust and extremely stable. This design, with its large working distance, is particularly suitable for the monitoring and analysis of cell cultures, for example
- A strong and continuously adjustable 30W halogen illumination unit ensures the optimum illumination in the bright field of your samples. An additional Osram 100 W Epi fluorescence illumination unit is available to you as a fluorescence microscope (OCM 165) for perfect illumination and excitation of your fluorescence samples
- A special Abbe N.A. 0.3 condenser with aperture diaphragm and large working distance of 72 mm guarantees the very best working practise in the bright field and with fluorescence applications
- As standard, the OCM range is fitted with a trinocular eyepiece tube

- The mechanical stage including specimen holder (∅ 118 mm) means that you can work quickly and effectively. Further brackets for petri dishes are included with delivery or available as accessories
- Further options such as, for example, a selection of eyepieces, objectives, specimen holders and other phase contrast units can be integrated as accessories
- A dust cover as well as user instructions are included with the delivery
- Please find detailed information in the following model outfit list

Scope of application

- Research and breeding of cell cultures and tissue cultures

Applications/Samples

- Particularly for viewing samples in culture vessels (flasks, petri dishes, microtitre plates), translucent, thin, low-contrast, challenging samples (e.g. living mammal cells, tissue, microorganisms if necessary, Immunofluorescence, FISH, DAPI staining etc.)

Technical data

- Infinity optical system
- Quintuple nosepiece
- Siedentopf 45° inclined
- Diopter adjustment: Both-sided


OCM 161

- Overall dimensions W×D×H 304×599×530 mm
- Net weight approx. 13,5 kg

OCM 165

- Overall dimensions W×D×H 304×782×530 mm
- Net weight approx. 21 kg

STANDARD



Model	Standard configuration					
	Tube	Eyepiece	Objective quality	Objectives	Illumination	
KERN						
OCM 161	Trinocular	HWF 10×/∅ 22 mm	Infinity Plan	LWD10×/LWD20×/ LWD40×/LWD20×PH	6 V/30 W Halogen (transmitted)	↓
OCM 165	Trinocular	HWF 10×/∅ 22 mm	Infinity Plan		6 V/30 W Halogen + 100 W Epi Fluorescence (B/G)	↓



Inverted microscope KERN OCM-1

Model outfit		Model KERN		Order number	
		OCM 161	OCM 165		
Eyepieces (30 mm)	HWF 10×/∅ 22 mm (adjustable)	✓✓	✓✓	OBB-A1491	
	HWF 10×/∅ 20 mm (reticule 0,1 mm) (adjustable)	○	○	OBB-A1523	
Infinity Plan achromatic objectives for long working distance	4×/0,11 W.D. 12,1 mm	○	○	OBB-A1493	
	10×/0,25 W.D. 8,3 mm	✓	✓	OBB-A1494	
	20×/0,40 W.D. 7,2 mm	✓	✓	OBB-A1495	
	40×/0,60 W.D. 3,4 mm	✓	✓	OBB-A1496	
Trinocular tube	<ul style="list-style-type: none"> • 45° inclined • Interpupillary distance 48–76 mm • Light distribution 100:0 • Diopter adjustment: Both-sided 	✓	✓		
Mechanical stage	<ul style="list-style-type: none"> • Stage size W×D 210×241 mm • Travel 128×80 mm • Coaxial coarse and fine focusing knobs • The x/y control knobs can be fitted either left or right • Suitable for attaching a 96-hole microtitre plate 	✓	✓		
	Drop specimen holder (∅ 110)	✓	✓	OBB-A1503	
	Specimen holder for 35 mm culture dish	○	○	OBB-A1505	
	Specimen holder for 54 mm culture dish	✓	✓	OBB-A1506	
	Specimen holder for 65 mm culture dish	○	○	OBB-A1507	
Condenser	Abbe N.A. 0,3 (aperture diaphragm), LWD 72 mm	✓	✓		
Illumination	6 V/30 W Halogen spare bulb (transmitted)	✓	✓	OBB-A1372	
Phase contrast units	Phase contrast slide (universal)	✓	✓	OBB-A1500	
	Infinity PH-Plan objective 10×	○	○	OBB-A1497	
	Infinity PH-Plan objective 20×	✓	✓	OBB-A1498	
	Infinity PH-Plan objective 40×	○	○	OBB-A1499	
	Centering eyepiece	✓	✓	OBB-A1544	
Fluorescence unit	100 W HBO Epi Fluorescence unit, two-hole slide (B/G)		✓		
Colour filters for transmitted illumination	Blue	✓	✓	OBB-A1510	
	Green	✓	✓	OBB-A1511	
	Yellow	○	○	OBB-A1512	
	Gray	○	○	OBB-A1513	
C-Mount	0,5×	○	○	OBB-A1515	
	1×	○	○	OBB-A1514	


✓ = Included with delivery

○ = Option

01

2 Metallurgical microscopes



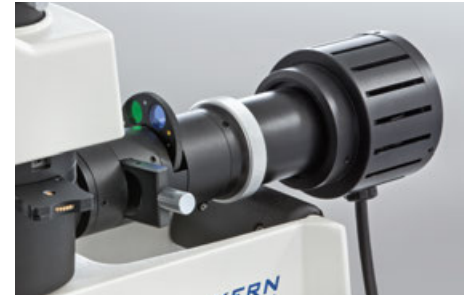

Illumination unit with filter disc



Stage and objectives

LAB LINE MET

The metallurgical reflected light microscope for material testing and surface testing, as well as quality assurance in industry

Features

- The KERN OKM is an excellent metallurgical reflected light microscope, e.g. for surface quality testing of raw materials and finished products in industry
- The strong, continuously dimmable 30 W halogen reflected illumination unit (Philips) ensures excellent, high-contrast images
- The illumination unit with an integrated 5-slot filter wheel for blue, green, yellow, grey and blank means that you can quickly change the colour filter for different contrast views
- A large mechanical stage for reflected illumination applications is configured as standard. The coarse and fine focusing knob on both sides guarantees optimal adjustment and focusing of your sample
- A simple polarising unit (analyser and polariser) is included with delivery
- A large selection of different eyepieces, objectives and a polarising unit are also available
- A protective dust cover, eye cups, as well as multi-lingual user instructions are included in the scope of delivery
- A C-mount adapter is required to connect a camera to the trinocular version. You can select this adapter from the following model outfit list
- Please find detailed information in the following model outfit list

Scope of application

- Metallurgy, material testing, quality assurance

Applications/Samples

- Opaque and thick samples, workpieces (surfaces, fold lines, coatings)

Technical data

- Infinity optical system
- Quadplex nosepiece
- Siedentopf 30° inclined/360° rotatable
- Diopter adjustment: One-sided
- Overall dimensions W×D×H 440×200×460 mm
- Net weight basic configuration approx. 8 kg

STANDARD



Model	Standard configuration					
	Tube	Eyepiece	Objective quality	Objectives	Illumination	
KERN						
OKM 172*	Binocular	HFV 10×/ø 18 mm	Infinity Plan	5×/10×/ LWD 20×/ LWD40×	6 V/30 W Halogen (incident)	↓
OKM 173	Trinocular	HFV 10×/ø 18 mm	Infinity Plan		6 V/30 W Halogen (incident)	↓

Model outfit		Model KERN		Order number	
		OKM 172	OKM 173		
Eyepieces (23,2 mm)	HWF 10×/∅ 18 mm	✓	✓	OBB-A1403	
	HWF 10×/∅ 18 mm (reticule 0,1 mm) (non-adjustable)	✓	✓	OBB-A1349	
	WF 5×/∅ 20 mm	○	○	OBB-A1355	
	WF 12,5×/∅ 14 mm	○	○	OBB-A1353	
	WF 16×/∅ 13 mm	○	○	OBB-A1354	
Infinity Plan achromatic objectives (no cover glass)	5×/0,11 W.D. 12,10 mm	✓	✓	OBB-A1268	
	10×/0,25 W.D. 4,75 mm	✓	✓	OBB-A1244	
	20×/0,40 (spring) W.D. 2,14 mm	○	○	OBB-A1251	
	40×/0,65 (spring) W.D. 0,45 mm	○	○	OBB-A1258	
Infinity Plan achromatic objectives (no cover glass) for long working distance	20×/0,40 W.D. 8,35 mm	✓	✓	OBB-A1252	
	40×/0,65 W.D. 3,90 mm	✓	✓	OBB-A1259	
	50×/0,70 (spring) W.D. 1,95 mm	○	○	OBB-A1266	
	80×/0,80 (spring) W.D. 0,85 mm	○	○	OBB-A1271	
Binocular tube	<ul style="list-style-type: none"> • Siedentopf 30° inclined/360° rotatable • Interpupillary distance 50 – 75 mm • Diopter adjustment: One-sided 	✓	○	OBB-A1130	
Trinocular tube	<ul style="list-style-type: none"> • Siedentopf 30° inclined/360° rotatable • Interpupillary distance 50 – 75 mm • Light distribution 80:20 • Diopter adjustment: One-sided 	○	✓	OBB-A1346	
Mechanical stage	<ul style="list-style-type: none"> • Stage size W×D 200×140 mm • Travel 76×52 mm • Coaxial coarse and fine focusing knobs 	✓	✓		
Illumination	6 V/30 W Halogen spare bulb (incident)	✓	✓	OBB-A1372	
Reflected illumination unit	5-filter unit (Blue, Green, Yellow, Gray, Empty)	✓	✓		
	Polarising unit (Incl. analyser and polariser slide)	✓	✓		
C-Mount	1×	○	○	OBB-A1142	
	0,47× (focus adjustable)	○	○	OBB-A1135	

✓ = Included with delivery

○ = Option



Stage OKN



Stage OKO



Illumination unit

02

PROFESSIONAL LINE MET

The fully-equipped reflected and transmitted light microscope for numerous applications in metallurgy

Features

- The KERN OKN and OKO series are professional, versatile, metallurgical microscopes, which are used in testing metals and analysing surfaces
- You can choose between two reflected illumination units: A 50 W halogen reflected illumination unit or a premium illumination unit with stunning 100 W reflected illumination for powerful performance
- A height-adjustable 1,25 Abbe condenser which can be centred as well as a field diaphragm are available for the transmitted light variants (KERN OKO series), for complete professional Koehler illumination
- The KERN OKO transmitted illumination variant is fitted with an open, mechanical stage, as standard. On the other hand, the KERN OKN reflected illumination variant has a closed, mechanical stage, as standard
- A simple polarising unit (analyser and polariser) is included with delivery
- A large selection of accessories, such as, for example, a Butterfly Tube, eyepieces and further objectives are available for longer working distances
- A protective dust cover, eye cups, as well as multi-lingual user instructions are included in the scope of delivery
- A C-Mount adapter is required to connect a camera. You can select this adapter from the following model outfit list
- Please find detailed information in the following model outfit list

Scope of application

- Metallurgy, material testing, quality assurance

Applications/Samples

- Opaque and thick samples, workpieces (surfaces, fold lines, coatings)

Technical data

- Infinity optical system
- Quintuple nosepiece
- Siedentopf 30° inclined/360° rotatable
- Diopter adjustment: Both-sided
- Overall dimensions W×D×H 550×200×460 mm
- Net weight basic configuration approx. 14,5 kg

STANDARD



Model	Standard configuration					
	Tube	Eyepiece	Objective quality	Objectives	Illumination	
OKN 175	Trinocular	WF 10×/∅ 18 mm	Infinity Plan	5×/10×/LWD20×/LWD40×	12 V/50 W Halogen (incident)	↓
OKO 176	Trinocular	WF 10×/∅ 18 mm	Infinity Plan	5×/10×/LWD20×/LWD40×/100×	12 V/50 W Halogen (incident) + 6 V/20 W (transmitted)	↓
OKN 177	Trinocular	WF 10×/∅ 18 mm	Infinity Plan	5×/10×/LWD20×/LWD40×	12 V/100 W Halogen (incident)	↓
OKO 178	Trinocular	WF 10×/∅ 18 mm	Infinity Plan	5×/10×/LWD20×/LWD40×/100×	12 V/100 W Halogen (incident) + 6 V/20 W (transmitted)	↓

Model outfit		Model KERN				Order number	
		OKN 175	OKO 176	OKN 177	OKO 178		
Eyepieces (23,2 mm)	WF 10×/∅ 18 mm	✓✓	✓✓	✓✓	✓✓	OBB-A1347	
	WF 10×/∅ 18 mm (reticule 0,1 mm) (adjustable)	✓	✓	✓	✓	OBB-A1350	
	WF 5×/∅ 20 mm	○	○	○	○	OBB-A1355	
	WF 12,5×/∅ 14 mm	○	○	○	○	OBB-A1353	
	WF 16×/∅ 13 mm	○	○	○	○	OBB-A1354	
Infinity Plan objectives (no cover glass)	5×/0,11 W.D. 6,73 mm	✓	✓	✓	✓	OBB-A1268	
	10×/0,25 W.D. 4,19 mm	✓	✓	✓	✓	OBB-A1244	
	20×/0,40 (spring) W.D. 2,14 mm	○	○	○	○	OBB-A1251	
	40×/0,65 (spring) W.D. 0,45 mm	○	○	○	○	OBB-A1258	
	100×/1,25 (oil) (spring) W.D. 0,12 mm		✓		✓	OBB-A1241	
Infinity Plan objectives (no cover glass) for long working distance	20×/0,40 W.D. 8,35 mm	✓	✓	✓	✓	OBB-A1252	
	40×/0,65 W.D. 3,90 mm	✓	✓	✓	✓	OBB-A1259	
	50×/0,70 (spring) W.D. 1,95 mm	○	○	○	○	OBB-A1266	
	80×/0,80 (spring) W.D. 0,85 mm	○	○	○	○	OBB-A1271	
Trinocular tube	<ul style="list-style-type: none"> • Siedentopf 30° inclined/360° rotatable • Interpupillary distance 50 – 75mm • Light distribution 100:0 • Diopter adjustment: Both-sided 	✓	✓	✓	✓		
	<ul style="list-style-type: none"> • Butterfly 30° inclined/360° rotatable • Interpupillary distance 50 – 75 mm • Light distribution 100:0 • Diopter adjustment: Both-sided 	○	○	○	○	OBB-A1382	
Mechanical stage for reflection	<ul style="list-style-type: none"> • Stage size W×D 200×140 mm • Travel 78×55 mm • Stage fast lowering unit • Stage Up-Down moving range: max. 50 mm 	✓		✓			
Mechanical stage for transmitted illumination	<ul style="list-style-type: none"> • Stage size W×D 175×145 mm • Travel 78×55 mm • Coaxial coarse and fine focusing knobs 		✓		✓		
Stage plate	Plate for sample placement	✓	✓	✓	✓		
Glass plate	Glass plate		○		○	OBB-A1378	
Reflected illumination unit	Polarising unit (Incl. analyser, polariser and blue filter slide)	✓	✓	✓	✓		
Condenser	Abbe N.A. 1,25 (aperture diaphragm)		✓		✓	OBB-A1380	
Illumination	6 V/20 W Halogen spare bulb (transmitted)		✓		✓	OBB-A1370	
	12 V/50 W Halogen spare bulb (incident)	✓	✓			OBB-A1207	
	12 V/100 W Halogen spare bulb (incident)			✓	✓	OBB-A1377	
Polarising unit	for transmitted illumination		✓		✓	OBB-A1470	
Colour filters for transmitted illumination	Blue		✓		✓		
	Green		○		○	OBB-A1188	
	Yellow		○		○	OBB-A1165	
	Gray		○		○	OBB-A1183	
C-Mount	1×	○	○	○	○	OBB-A1140	
	0,57× (focus adjustable)	○	○	○	○	OBB-A1136	

✓ = Included with delivery

○ = Option



OLE 161



OLF 162

02

EDUCATIONAL LINE MET

The compact inverted metallurgical microscope for details with large workpieces

Features

- The inverted series – KERN OLE and KERN OLF – stand out through their design which is compact, stable and ergonomic
- The strong, continuously dimmable 3 W LED reflected illumination guarantees a permanent optimum illumination of the materials being tested
- A mechanical stage with additional plate (opening \varnothing 10 mm and \varnothing 20 mm) is included with delivery as standard. The coarse and fine focusing knob on both sides guarantees optimal adjustment and focusing
- Colour filters (blue, green and grey) are included with delivery

- A large selection of eyepieces, stage inserts and objectives for a larger working distance are available as accessories
- A protective dust cover, eye cups, as well as multi-lingual user instructions are included in the scope of delivery
- Please find detailed information in the following model outfit list

Scope of application

- Training, metallurgy, material testing, quality assurance

Applications/Samples

- Inverted opaque or translucent samples, workpieces (surfaces, fold lines, coatings), inverted viewing

Technical data

- Finite optical system (DIN)
- Quadplex nosepiece
- Tube 45° inclined
- Diopter adjustment: One-sided (for binocular models)
- Overall dimensions W×D×H 340×190×330 mm
- Net weight basic configuration approx. 7 kg


STANDARD					OPTION
MONO	BINO	LED	230 V	1 DAY	SCALE

Model	Standard configuration					
	Tube	Eyepiece	Objective quality	Objectives	Illumination	
KERN						
OLE 161	Monocular	WF 10×/ϕ 18 mm	Plan	10×/20×/40×	3 W LED (incident)	
OLF 162	Binocular	WF 10×/ϕ 18 mm	Plan		3 W LED (incident)	

Model outfit		Model KERN		Order number	
		OLE 161	OLF 162		
Eyepieces (23,2 mm)	WF 10×/ø 18 mm	✓	✓✓	OBB-A1347	
	WF 12,5×/ø 14 mm	○	○○	OBB-A1353	
	WF 16×/ø 13 mm	○	○○	OBB-A1354	
	WF 5×/ø 20 mm	○	○○	OBB-A1355	
	WF 10×/ø 18 mm (reticule 0,1 mm) (non-adjustable)	○	○○	OBB-A1349	
Plan achromatic objectives	10×/0,25 W.D. 8,87 mm	✓	✓	OBB-A1246	
	20×/0,35 (spring) W.D. 1,6 mm	✓	✓	OBB-A1253	
	40×/0,65 W.D. 0,72 mm	✓	✓	OBB-A1261	
	100×/1,25 (spring) (oil) W.D. 0,69 mm	○	○	OBB-A1242	
	5×/0,10 W.D. 14,5 mm	○	○	OBB-A1265	
Plan achromatic objectives for long working distance	40×/0,60 W.D. 3,64 mm	○	○	OBB-A1262	
	50×/0,70 W.D. 3,01 mm	○	○	OBB-A1267	
	80×/0,80 (spring) W.D. 1,08 mm	○	○	OBB-A1272	
Monocular tube	45° inclined	✓		OBB-A1228	
Binocular tube	· Siedentopf 45° inclined · Diopter adjustment: One-sided		✓	OBB-A1128	
Mechanical stage	· Stage size W×D 180×180 mm · Travel 50×40 mm	✓	✓		
Extra stage plate	1 (opening ø 10 mm)	✓	✓	OBB-A1322	
	2 (opening ø 20 mm)	✓	✓	OBB-A1323	
	3 (opening ø 40 mm)	○	○	OBB-A1324	
Illumination	3 W LED illumination system (incident)	✓	✓		
Colour filters for transmitted illumination	Blue	✓	✓	OBB-A1174	
	Green	✓	✓	OBB-A1190	
	Gray	✓	✓	OBB-A1184	

✓ = Included with delivery

○ = Option

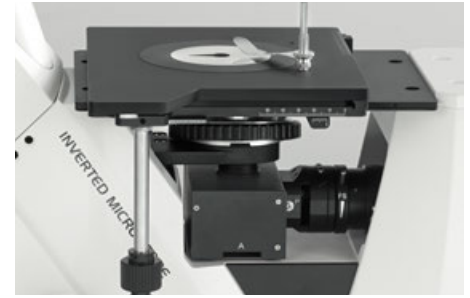

Specimen stage and illumination unit



Analyser/Polariser

02

LAB LINE

The inverted metallurgical microscope for professional applications

Features

- The KERN OLM range is part of the range of inverted microscopes and stands out through its design which is ergonomic, robust and extremely stable. This range, with its large working distance is, for example, particularly suitable for surface quality testing of raw materials and finished products in industry
- Strong and continuously adjustable 50W halogen illumination unit ensures the optimum illumination of the materials to be tested
- As standard, the OLM range is fitted with a trinocular eyepiece tube
- A simple polarising unit (analyser and polariser) is included with delivery
- A large mechanical stage is included with delivery as standard. The coarse and fine focusing knob on both sides guarantees optimal adjustment and focusing
- Further options such as, for example, a large selection of objectives can be integrated as accessories
- A dust cover as well as user instructions are included with the delivery
- Please find detailed information in the following model outfit list

Scope of application

- Metallurgy, material testing, quality assurance

Applications/Samples

- Opaque and thick samples, workpieces (surfaces, fold lines, coatings)

Technical data

- Infinity optical system
- Quintuple nosepiece
- Siedentopf 30° inclined
- Diopter adjustment: Both-sided
- Overall dimensions W×D×H 271×379×747 mm
- Net weight approx. 12,5 kg

STANDARD



Model	Standard configuration					
	Tube	Eyepiece	Objective quality	Objectives	Illumination	
KERN						
OLM 171	Trinocular	HWF 10×/ø 22 mm	Infinity Plan	LWD5×/LWD10×/ LWD20×/LWD50×	12 V/50 W Halogen (incident)	↓

Metallurgical inverted microscope KERN OLM-1

Model outfit		Model KERN	Order number	
		OLM 171		
Eyepieces (30 mm)	HWF 10×/∅ 22 mm (adjustable)	✓	OBB-A1491	
	HWF 10×/∅ 22 mm (reticule 0,1 mm) (adjustable)	✓	OBB-A1523	
Infinity Plan achromatic objectives for long working distance	5×/0,13 W.D. 24,23 mm	✓	OBB-A1525	
	10×/0,25 W.D. 18,48 mm	✓	OBB-A1526	
	20×/0,40 W.D. 8,35 mm	✓	OBB-A1527	
	50×/0,70 (spring) W.D. 1,95 mm	✓	OBB-A1528	
	80×/0,80 (spring) W.D. 0,85 mm	○	OBB-A1530	
	100×/0,90 (dry) W.D. 1,0 mm	○	OBB-A1531	
Trinocular tube	<ul style="list-style-type: none"> • 30° inclined • Interpupillary distance 48-76 mm • Light distribution 100:0 • Diopter adjustment: Both-sided 	✓		
Mechanical stage	<ul style="list-style-type: none"> • Stage size W×D 210×180 mm • Travel 50×50 mm • Coaxial coarse and fine focusing knobs 	✓		
Illumination	12 V/50 W Halogen spare bulb (incident)	✓	OBB-A1207	
Reflected illumination unit	Polarising unit (Incl. analyser, polariser and colour filter slide)	✓		
Colour filters for transmitted illumination	Blue	✓	OBB-A1510	
	Green	○	OBB-A1511	
	Yellow	○	OBB-A1512	
	Gray	○	OBB-A1513	
C-Mount	0,5×	○	OBB-A1515	
	1×	○	OBB-A1514	

✓ = Included with delivery

○ = Option

02

3 Polarising microscopes





λ Slip and quartz wedge

EDUCATIONAL LINE POL

The economical polarising microscope for training, laboratory and industry

Features

- The KERN OPE series is a range of excellent polarising microscopes with transmitted light for all common routine applications, such as, for example observation and analysis of translucent, isotropic materials such as, for example, crystals or minerals
- The strong, continuously dimmable 20 W halogen transmitted illumination is the basis for excellent and high-contrast images
- The height-adjustable and focusable 1,25 Abbe condenser with aperture diaphragm is a further quality feature of the KERN OPE series and ensures the very best adjustment of the illumination
- A quadruple nosepiece enables rapid and simple changing to the different magnification levels. As standard, the nosepiece is fitted with three achromatic “non stress” polarising objectives
- The monocular eyepiece tube is fitted with a polarising unit, a Bertrand lens and a $\lambda + \frac{1}{4} \lambda$ Slip
- A 360° revolving stage with 1° division, 6' fine division and locking function is integrated into the KERN OPE series as standard
- A large selection of accessories such as, for example, a quartz wedge, a mechanical table attachment as well as further objectives are available
- A protective dust cover, eye cups, as well as multi-lingual user instructions are included in the scope of delivery
- Please find detailed information in the following model outfit list

Scope of application

- Training, mineralogy, texture observations, material testing, observation of crystals

Applications/Samples

- Less complex samples with polarising properties

Technical data

- Finite Optik (DIN)
- Quadplex nosepiece
- Siedentopf 30° inclined/360° rotatable
- Overall dimensions WxDxH 320x180x380 mm
- Net weight approx. 5,5 kg

STANDARD



Model	Standard configuration					
	Tube	Eyepiece	Objective quality	Objectives	Illumination	
KERN						
OPE 118	Monocular	HWF 10x/φ 18 mm	Achromatic	Non-stress 4x/10x/40x	6 V/20 W Halogen (transmitted)	↓

Model outfit		Model KERN	Order number	
		OPE 118		
Eyepieces (23,2 mm)	HWF 10×/∅ 18 mm (reticule 0,1 mm) (non-adjustable)	✓	OBB-A1349	
	WF 16×/∅ 13 mm	○	OBB-A1354	
Non-stress achromatic objectives	4×/0,10 W.D. 18,6 mm	✓	OBB-A1280	
	10×/0,25 W.D. 6,5 mm	✓	OBB-A1278	
	40×/0,66 (spring) W.D. 0,47 mm	✓	OBB-A1281	
	20×/0,10 (spring) W.D. 1,75 mm	○	OBB-A1279	
	60×/0,80 (spring) W.D. 0,1 mm	○	OBB-A1282	
Monocular tube	30° inclined/360° rotatable	✓	OBB-A1227	
Analyser unit	0 – 90°, can easily be moved out of the optical path	✓		
Bertrand lens	Can easily be moved out of the optical path	✓	OBB-A1120	
λ + ¼ λ Slip	λ Slip and ¼ λ Slip (combination)	✓	OBB-A1316	
Quartz wedge	I – IV Class	○	OBB-A1320	
Revolving round stage	360° rotatable, Division 1°, Fine division 6', locking fuction	✓		
Polarising attached mechanical stage	Polarising attached mechanical stage	○	OBB-A1337	
Condenser	Abbe N.A. 1,25 (aperture diaphragm)	✓	OBB-A1101	
Polarising unit	Can be moved out of the optical path	✓		
Colour filters for transmitted illumination	Blue (holder ring)	✓	OBB-A1173	
Illumination	6 V/20 W Halogen spare bulb (transmitted)	✓	OBB-A1370	

✓ = Included with delivery

○ = Option




OPO




OPM



OPN

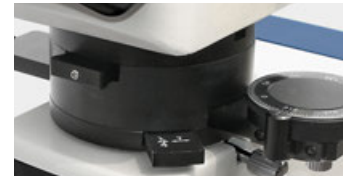

Bertrand lens, λ Slip, 360° rotatable analyser (removable)

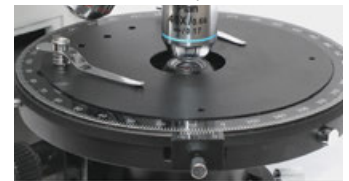

Center-adjustable and turnable polarisation stage



"Swing-Out" condenser

PROFESSIONAL LINE POL

The flexible and powerful polarising microscope for all professional applications with reflected and transmitted light

Features

- These devices are professional, fully-equipped polarising microscopes, which use the polarisation of light to analyse minerals, crystals and isotropic materials
- You can choose between a pure transmitted light variant (KERN OPM), a pure reflected light variant (KERN OPN) and a combi variant (KERN OPO). A complete Koehler illumination is integrated into all series as standard
- As standard, the KERN OPM and OPO transmitted illumination variants have a height-adjustable 0,9/0,13 swing-out Abbe condenser which can be centred, for complete Koehler illumination
- A 360° revolving stage with 1° division, 6' fine division and locking function is integrated into all series as standard
- As standard all series are fitted with a complete polarising unit with scale, a Bertrand lens, a $\lambda + \frac{1}{4} \lambda$ Slip as well as a quartz wedge
- A large selection of accessories such as, for example, a mechanical stage attachment as well as further objectives for a long working distance and filter units are also available
- A protective dust cover, eye cups, as well as multi-lingual user instructions are included in the scope of delivery
- A C-Mount adapter is required to connect a camera. You can select this adapter from the following model outfit list
- Please find detailed information in the following model outfit list

Scope of application

- Mineralogy, texture observations, material testing, observation of crystals

Applications/Samples

- More complex samples with polarising properties

Technical data

- Infinity optical system
- Quintuple nosepiece
- Siedentopf 30° inclined/360° rotatable
- Diopter adjustment: One-sided
- Overall dimensions W×D×H 500×200×500 mm
- Net weight approx. 14,5 kg

STANDARD



Model	Standard configuration					
	Tube	Eyepiece	Objective quality	Objectives	Illumination	
OPM 181	Trinocular	WF 10×/∅ 20 mm	Inifnity Plan	Non-stress 4×/10×/20×/40×	6 V/20 W Halogen (transmitted)	↓
OPN 182	Trinocular	WF 10×/∅ 18 mm	Inifnity Plan	Non-stress 4×/10×/20×/40×	12 V/50 W Halogen (incident)	↓
OPO 183	Trinocular	WF 10×/∅ 18 mm	Inifnity Plan	Non-stress 4×/10×/20×/40×/60×	12 V/50 W Halogen (incident) + 6 V/20 W (transmitted)	↓
OPN 184	Trinocular	WF 10×/∅ 18 mm	Inifnity Plan	Non-stress 4×/10×/20×/40×	12 V/100 W Halogen (incident)	↓
OPO 185	Trinocular	WF 10×/∅ 18 mm	Inifnity Plan	Non-stress 4×/10×/20×/40×/60×	12 V/100 W Halogen (incident) + 6 V/20 W (transmitted)	↓



Model outfit		Model KERN					Order number	
		OPM 181	OPN 182	OPO 183	OPN 184	OPO 185		
Eyepieces (23,2 mm)	WF 10×/18 mm		✓	✓	✓	✓	OBB-A1347	
	WF 10×/18 mm (reticule 0,1 mm) (adjustable)		✓	✓	✓	✓	OBB-A1464	
	WF 10×/20 mm	✓					OBB-A1351	
	WF 10×/20 mm (reticule 0,1 mm) (adjustable)	✓					OBB-A1465	
Non-stress Infinity Plan objectives	4×/0,10 W.D. 12,1 mm	✓	✓	✓	✓	✓	OBB-A1294	
	10×/0,25 W.D. 4,64 mm	✓	✓	✓	✓	✓	OBB-A1289	
	20×/0,40 (spring) W.D. 2,41 mm	✓	✓	✓	✓	✓	OBB-A1290	
	40×/0,65 (spring) W.D. 0,65 mm	✓		✓		✓	OBB-A1292	
	40×/0,65 (spring) (no cover glass) W.D. 3,9 mm	○	✓	○	✓	○	OBB-A1288	
	60×/0,80 (spring) W.D. 0,33 mm	○	○	✓	○	✓	OBB-A1296	
Infinity Plan objectives (no cover glass) for long working distance	20×/0,40 W.D. 8,35 mm	○	○	○	○	○	OBB-A1291	
	40×/0,65 W.D. 3,90 mm	○	○	○	○	○	OBB-A1293	
	50×/0,70 (spring) W.D. 1,95 mm	○	○	○	○	○	OBB-A1295	
	80×/0,80 (spring) W.D. 0,85 mm	○	○	○	○	○	OBB-A1297	
Trinocular tube	<ul style="list-style-type: none"> • Siedentopf 30° inclined • Interpupillary distance 50 – 75 mm • Light distribution 100:0 • Diopter adjustment: One-sided 	✓	✓	✓	✓	✓		
Professional dedicated polarising trinocular head	To keep the reticular cross in the right-hand eyepiece in the same position, independent of the adjustment of the tube.	○	○	○	○	○	OBB-A1210	
Analyser unit with scale	360° rotatable, lockable	✓	✓	✓	✓	✓		
Bertrand lens	Built-in, center-adjustable	✓	✓	✓	✓	✓	OBB-A1121	
λ + ¼ λ Slip	λ Slip and ¼ λ Slip (combination)	✓	✓	✓	✓	✓	OBB-A1316	
Quartz wedge	I – IV Class	✓	✓	✓	✓	✓	OBB-A1321	
Revolving round stage	360° rotatable, center-adjustable, division 1°, Vernier division 6'	✓	✓	✓	✓	✓		
Polarising attached mechanical stage	Polarising attached mechanical stage	○	○	○	○	○	OBB-A1337	
Swing-out condenser	N.A. 0,9/0,13 swing-out achromatic condenser (aperture diaphragm)	✓		✓		✓	OBB-A1107	
Polarising unit with scale (transmitted)	360° rotatable, lockable	✓		✓		✓		
Koehler illumination	6 V/20 W Halogen spare bulb (transmitted)	✓		✓		✓	OBB-A1370	
Reflecting polarising unit replacement bulb	12 V/50 W Halogen		✓	✓	○	○	OBB-A1207	
	12 V/100 W Halogen		○	○	✓	✓	OBB-A1377	
Colour filters for transmitted illumination	Blue	✓		✓		✓	OBB-A1170	
	Green	○		○		○	OBB-A1188	
	Yellow	○		○		○	OBB-A1165	
	Gray	○		○		○	OBB-A1183	
C-Mount	1×	○	○	○	○	○	OBB-A1140	
	0,57× (focus adjustable)	○	○	○	○	○	OBB-A1136	

✓ = Included with delivery

○ = Option



Cleaning sets for microscopes

Features

- This economical and fully equipped 7-piece cleaning set contains everything you need for the very best care of your microscope
- A silicon hand blower, dust brush, 60 ml of cleaning liquid, lint-free duster, optical cleaning cloths and cleaning swabs. You get all that in a high-quality KERN storage bag which you can also easily fix onto your belt
- You can use this set not only to gently clean your microscope, but also for example your camera, binoculars or all other optical surfaces

Model	Description	
KERN		
OCS 901	7-piece cleaning sets for microscopes und other optical instruments	

Microscopy, measuring technology and testing services from a single source



Optical instruments catalogue



Balances & test service catalogue



Medical scales catalogue



SAUTER measuring equipment catalogue



DAkkS calibration service brochure

4 Stereomicroscopes

Stereo, Stereo-Zoom, Coaxial and Gem microscopes





OSE 416/417



With white stage plate



With black stage plate

04

EDUCATIONAL LINE

The small robust model for school, training establishment or workshops

Features

- The KERN OSE-4 is an extremely robust, stable stereo microscope which is easy to use, it is ideal for all conventional applications in schools, workshops and training companies
- Depending on the model, optional LED reflected illumination as well as transmitted and reflected illumination ensure the very best illumination of your sample
- Despite its low price it has very good optical characteristics, which enable you to have sharp images over a large field of view
- A turnable objective with predefined magnifications is available to make your working procedures quicker and more efficient
- The eyepieces are fixed in the eyepiece tube, to stop them getting damaged or lost
- A special feature of this adaptable and yet robust microscope series is the stable mechanism of the microscope stand which can be adjusted precisely. It will also impress you with its functionality and ergonomic design
- A large selection of eyepieces as well as various additional external illumination units are available as accessories
- A protective dust cover, eye cups, as well as multi-lingual user instructions are included in the scope of delivery
- Please find detailed information in the following model outfit list

Scope of application

- Training, in vitro fertilisation, detection of parasites, zoology and botany, tissue preparation, section, quality control

Applications/Samples

- Samples with focus on three-dimensional impression (depth, thickness), e.g. insects, seeds, circuit boards, components

Technical data

- Optical system: Greenough optics
- Tube 45° inclined
- Interpupillary distance 55 – 75 mm
- Diopter adjustment: One-sided
- Overall dimensions W×D×H 230×130×330 mm
- Net weight approx. 2 kg

STANDARD



Model	Standard configuration					
	Tube	Eyepiece	Field of view mm	Objective	Stand	Illumination
KERN OSE 416	Binocular	WF 10×/ø 20 mm	ø 20	1×/3×	Pillar style	0,21 W LED (incident); 0,21 W LED (transmitted)
KERN OSE 417	Binocular	WF 10×/ø 20 mm	ø 20	2×/4×	Pillar style	0,21 W LED (incident); 0,21 W LED (transmitted)

Stereomicroscope KERN OSE-4

Eyepiece	Specifications – Objectives				
	Magnification	1×	2×	3×	4×
WF 5×	Total magnification	5×	10×	15×	20×
	Field of view mm	∅ 20	∅ 10	∅ 6,7	∅ 5
WF 10×	Total magnification	10×	20×	30×	40×
	Field of view mm	∅ 20	∅ 10	∅ 6,7	∅ 5
WF 15×	Total magnification	15×	30×	45×	60×
	Field of view mm	∅ 15	∅ 7,5	∅ 5	∅ 3,7
WF 20×	Total magnification	20×	40×	60×	80×
	Field of view mm	∅ 10	∅ 6,5	∅ 4,3	∅ 3,2
Working distance		57 mm	57 mm	57 mm	57 mm

Model outfit		Model KERN		Order number	
		OSE 416	OSE 417		
Eyepieces (30,5 mm)	WF 5×/∅ 16,2 mm	○ ○	○ ○	OZB-A4101	
	WF 10×/∅ 20 mm	✓ ✓	✓ ✓	OZB-A4102	
	WF 15×/∅ 15 mm	○ ○	○ ○	OZB-A4103	
	WF 20×/∅ 10 mm	○ ○	○ ○	OZB-A4104	
Stand	Pillar style, without illumination				
	Pillar style, with 0,21 W LED illumination (incident)				
	Pillar style, with 0,21 W LED illumination (transmission + incident)	✓	✓		
Stage plate	Black-white/∅ 59,5 mm			OZB-A4816	
	Frosted glass/∅ 95 mm	✓	✓	OZB-A4805	
	Black-white/∅ 95 mm	✓	✓	OZB-A4806	
External illumination	Please find the information about external illumination units in the catalogue on page 83 and on the internet				

✓ = Included with delivery

○ = Option



Stage plate black



Stage plate white

4

EDUCATIONAL LINE

The practical and robust product for schools, training centres, the workshop and laboratory

Features

- With its integrated handle as well as its stable arm curved stand, the KERN OSF-4G has been specially developed for schools and workshops
- The LED reflected and transmitted illumination included as standard guarantees the very best, continuously dimmable illumination of your sample
- As well as very good optical characteristics, its ergonomic working surface means that it offers the highest level of convenience in this class
- A turnable objective with three predefined magnifications is available to make your working procedures quicker and more effective
- The eyepieces are fixed in the eyepiece tube, to stop them getting damaged or lost
- The ergonomic shape and the stable mechanism which can be adjusted extremely accurately offer a high level of functionality and enable you to work quickly and efficiently with very little effort
- A large selection of eyepieces as well as various additional external illumination units are available as accessories
- A protective dust cover, eye cups, as well as multi-lingual user instructions are included in the scope of delivery
- Please find detailed information in the following model outfit list

Scope of application

- Training, in vitro fertilisation, detection of parasites, zoology and botany, tissue preparation, section, quality control

Applications/Samples

- Samples with focus on three-dimensional impression (depth, thickness), e.g. insects, seeds, circuit boards, components

Technical data

- Optical system: Greenough optics
- Brightness adjustable (separate)
- Tube 45° inclined
- Interpupillary distance 55 – 75 mm
- Diopter adjustment: One-sided
- Overall dimensions W×D×H 230×180×275 mm
- Net weight approx. 2,5 kg

STANDARD



Model	Standard configuration					
	Tube	Eyepiece	Field of view mm	Objective	Stand	Illumination
KERN						
OSF 438	Binocular	WF 10×/ø 20 mm	ø 20	1×/2×/3×	Arm curved	1 W LED (incident); 0,35 W LED (transmitted)
OSF 439	Binocular	WF 10×/ø 20 mm	ø 20	1×/2×/4×	Arm curved	1 W LED (incident); 0,35 W LED (transmitted)

Eyepiece	Specifications – Objectives				
	Magnification	1×	2×	3×	4×
WF 5×	Total magnification	5×	10×	15×	20×
	Field of view mm	∅ 20	∅ 10	∅ 6,7	∅ 5
WF 10×	Total magnification	10×	20×	30×	40×
	Field of view mm	∅ 20	∅ 10	∅ 6,7	∅ 5
WF 15×	Total magnification	15×	30×	45×	60×
	Field of view mm	∅ 15	∅ 7,5	∅ 5	∅ 3,7
WF 20×	Total magnification	20×	40×	60×	80×
	Field of view mm	∅ 10	∅ 6,5	∅ 4,3	∅ 3,2
Working distance		57 mm	57 mm	57 mm	57 mm

Model outfit		Model KERN		Order number	
		OSF 438	OSF 439		
Eyepieces (30,5 mm)	WF 5×/∅ 16,2 mm	○○	○○	OZB-A4101	
	WF 10×/∅ 20 mm	✓✓	✓✓	OZB-A4102	
	WF 15×/∅ 15 mm	○○	○○	OZB-A4103	
	WF 20×/∅ 10 mm	○○	○○	OZB-A4104	
Stand	Arm curved, incl. handle, with LED illumination (0,35 W transmitted + 1 W incident)	✓	✓		
Stage plate	Frosted glass/∅ 59,5 mm	✓	✓	OZB-A4815	
	Black-white/∅ 59,5 mm	✓	✓	OZB-A4816	
External illumination	Please find the information about external illumination units in the catalogue on page 83 and on the internet				

✓ = Included with delivery

○ = Option



04

LAB LINE

The affordable and flexible stereo zoom microscope for laboratories, inspection authorities and quality controls

Features

- The products in the KERN OZL-44 series are stereo zoom microscopes, which will impress you with their easy handling, flexibility as well as their stability and economical price
- The LED reflected and transmitted illumination included as standard guarantees the very best illumination of your sample
- As well as excellent optical characteristics and their large working surface, these models offer the highest level of comfort in this class – ideal for training companies, workshops as well as assembly and repair workstations, e.g. in the electronics industry
- The zoom objective gives you continuous magnification of 7,5× – 36×
- The OZL-44 series is available as a binocular version. The eyepieces are fixed in the eyepiece tube, to stop them getting damaged or lost
- The pillar stand offers you the highest level of flexibility and the freedom to remove the microscope head and to integrate it into other modular systems, for example into a universal stand
- A large selection of eyepieces, external illumination units as well as auxiliary objectives are available as accessories
- A protective dust cover, eye cups, as well as multi-lingual user instructions are included in the scope of delivery
- Please find detailed information in the following model outfit list

Scope of application

- In vitro fertilisation, detection of parasites, zoology and botany, tissue preparation, section, quality control

Applications/Samples

- Samples with focus on three-dimensional impression, zoom with variable magnification (depth, thickness), e.g. insects, seeds, circuit boards, components

Technical data

- Optical system: Greenough optics
- Brightness adjustable (separate)
- Tube 45° inclined
- Magnification ratio: 4,8:1
- Interpupillary distance 55 – 75 mm
- Diopter adjustment: Both-sided
- Overall dimensions W×D×H 330×235×380 mm
- Net weight approx. 5 kg

STANDARD



Model	Standard configuration					
	Tube	Eyepiece	Field of view mm	Objective Zoom	Stand	Illumination
KERN OZL 445	Binocular	WF 10×/ø 20 mm	ø 26,7 – 5,6	0,75× – 3,6×	Pillar style	1 W LED (incident); 0,35 W LED (transmitted)

Stereo zoom microscope KERN OZL-44

OZL 445		Specifications - Objectives				
Eyepiece	Magnification	Standard 1,0×	Auxiliary objectives			
			0,5×	0,75×	1,5×	2,0×
WF 5×	Total magnification	3,75× - 18×	1,875× - 9×	2,81× - 13,5×	5,625× - 27×	7,5× - 36×
	Field of view mm	∅ 26 - 6	∅ 60 - 13	∅ 32 - 7	∅ 16 - 4	∅ 12,5 - 3
WF 10×	Total magnification	7,5× - 36×	3,75× - 18×	5,625× - 27×	11,25× - 54×	15× - 72×
	Field of view mm	∅ 26,7 - 5,6	∅ 53,3 - 11,1	∅ 35,5 - 7,4	∅ 17,8 - 3,7	∅ 13,3 - 2,8
WF 15×	Total magnification	11,25× - 54×	5,625× - 27×	8,44× - 40,5×	16,875× - 81×	22,5× - 108×
	Field of view mm	∅ 19 - 4,5	∅ 43 - 9,5	∅ 24 - 5,5	∅ 12 - 3	∅ 9,5 - 2
WF 20×	Total magnification	15× - 72×	7,5× - 36×	56,25× - 54×	22,5× - 108×	30× - 144×
	Field of view mm	∅ 12,5 - 3	∅ 28 - 6	∅ 16 - 3,5	∅ 8 - 2	∅ 6 - 1,5
Working distance		86 mm	178 mm	96 mm	42,5 mm	25,5 mm
Maximum sample height		100 mm	10 mm	60 mm	120 mm	135 mm

Model outfit		Model KERN	Order number
		OZL 445	
Eyepieces (30,5 mm)	WF 5×/∅ 16,2 mm	○ ○	OZB-A4101
	WF 10×/∅ 22 mm		OZB-A4105
	WF 10×/∅ 20 mm	✓ ✓	OZB-A4102
	WF 15×/∅ 15 mm	○ ○	OZB-A4103
	WF 20×/∅ 10 mm	○ ○	OZB-A4104
Auxiliary objectives	0,5×	○	OZB-A4201
	0,75×	○	OZB-A4202
	1,5×	○	OZB-A4204
	2,0×	○	OZB-A4205
	Soldering protection lens	○	OZB-A4251
Stand	Pillar style, with LED illumination (0,35 W transmitted + 1 W incident)	✓	
Stage plate	Frosted glass/∅ 95 mm	✓	OZB-A4805
	Black-white/∅ 95 mm	✓	OZB-A4806
External illumination	Please find the information about external illumination units in the catalogue on page 83 and on the internet		

✓ = Included with delivery

○ = Option



OZL 464
With standard stand



OZL 465
With ring illumination



OZL 467
With handle

LAB LINE

The flexible, affordable all-rounder with zoom function for schools, training companies, inspection authorities and laboratories

Features

- The products in the KERN OZL-46 series are stereo zoom microscopes, which will impress you with their quality, easy handling, flexibility as well as their stability and economical price
- The LED reflected and transmitted illumination included as standard guarantees the very best illumination of your sample
- The highlight of the OZL 465/OZL 466 is the strong, continuously dimmable, integrated LED ring illumination in the objective housing, which ensures uniform, shadow-free illumination. An LED transmitted light variant is also included
- As well as excellent optical characteristics and their large working surface, these models offer the highest level of comfort in this class – ideal for training companies, workshops as well as assembly and repair workstations, e.g. in the electronics industry
- The zoom objective offers you continuous magnification from 7×–45×
- The KERN OZL-46 series is available as a binocular or trinocular version
- The pillar stand offers you the highest level of flexibility and the freedom to remove the microscope head and to integrate it into other modular systems, for example into a universal stand
- With its integrated handle as well as its stable arm curved stand, the KERN OZL 467/OZL 468 has been specially developed for schools and workshops
- A large selection of eyepieces, external illumination units as well as auxiliary objectives are available as accessories
- A protective dust cover, eye cups, as well as multi-lingual user instructions are included in the scope of delivery
- A C-mount adapter is required to connect a camera to the trinocular version. You can select this adapter from the following model outfit list
- Please find detailed information in the following model outfit list

Scope of application

- In vitro fertilisation, detection of parasites, zoology and botany, tissue preparation, section, quality control

Applications/Samples

- Samples with focus on three-dimensional impression, zoom with variable magnification (depth, thickness), e.g. insects, seeds, circuit boards, components

Technical data

- Optical system: Greenough optics
- Brightness adjustable (separate)
- Tube 45° inclined
- Magnification ratio: 6,4:1
- Light distribution 50:50
- Interpupillary distance 55 – 75 mm
- Diopter adjustment: Both-sided
- Overall dimensions W×D×H 300×240×420 mm
- Net weight approx. 4 kg

STANDARD



Model	Standard configuration						
	Tube	Eyepiece	Field of view mm	Objective Zoom	Stand	Illumination	
KERN							
OZL 463	Binocular	HWF 10×/ø 20 mm	ø 28,6 – 4,4	0,7× – 4,5×	Pillar style	3 W LED (incident); 3 W LED (transmitted)	↓
OZL 464	Trinocular	HWF 10×/ø 20 mm	ø 28,6 – 4,4	0,7× – 4,5×	Pillar style	3 W LED (incident); 3 W LED (transmitted)	↓
OZL 465 <small>NEW</small>	Binocular	HWF 10×/ø 20 mm	ø 28,6 – 4,4	0,7× – 4,5×	Pillar style	3 W LED (incident); 3 W LED (transmitted)	
OZL 466 <small>NEW</small>	Trinocular	HWF 10×/ø 20 mm	ø 28,6 – 4,4	0,7× – 4,5×	Pillar style	3 W LED (incident); 3 W LED (transmitted)	
OZL 467 <small>NEW</small>	Binocular	HWF 10×/ø 20 mm	ø 28,6 – 4,4	0,7× – 4,5×	Arm curved	3 W LED (incident); 3 W LED (transmitted)	
OZL 468 <small>NEW</small>	Trinocular	HWF 10×/ø 20 mm	ø 28,6 – 4,4	0,7× – 4,5×	Arm curved	3 W LED (incident); 3 W LED (transmitted)	

NEW ↓ Price reduction

Eyepiece	Specifications - Objectives					
	Magnification	Standard 1,0×	Auxiliary objectives			
			0,5×	0,75×	1,5×	2,0×
HSWF 10×	Total magnification	7× - 45×	3,5× - 22,5×	5,3× - 33,8×	10,5× - 67,5×	14× - 90×
	Field of view mm	∅ 28,6 - 4,4	∅ 57,1 - 8,9	∅ 38,1 - 5,9	∅ 19 - 3	∅ 14,3 - 2,2
HWF 15×	Total magnification	10,5× - 67,5×	5,3× - 33,8×	7,9× - 50,6×	15,5× - 101,3×	21× - 135×
	Field of view mm	∅ 21,4 - 3,3	∅ 42,9 - 6,7	∅ 28,5 - 4,4	∅ 14,3 - 2,2	∅ 10,7 - 1,7
HSWF 20×	Total magnification	14× - 90×	7× - 45×	10,5× - 67,5×	21× - 135×	28× - 180×
	Field of view mm	∅ 14,3 - 2,2	∅ 28,6 - 4,4	∅ 19,1 - 2,9	∅ 9,5 - 1,5	∅ 7,1 - 1,1
HWF 25×	Total magnification	17,5× - 122,5×	8,8× - 56,3×	13,1× - 91,9×	26,3× - 168,8×	35× - 225×
	Field of view mm	∅ 12,9 - 2,0	∅ 25,7 - 4,0	∅ 17,2 - 2,7	∅ 8,6 - 1,3	∅ 6,4 - 1,0
Working distance		105 mm	177 mm	120 mm	47 mm	26 mm
Maximum sample height		140 mm	35 mm	80 mm	165 mm	185 mm

Model outfit		Model KERN						Order number	
		OZL 463	OZL 464	OZL 465	OZL 466	OZL 467	OZL 468		
Eyepieces (30,0 mm)	HWF 10×/∅ 20 mm	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	OZB-A4631	
	HSWF 15×/∅ 15 mm	○	○	○	○	○	○	OZB-A4632	
	HWF 20×/∅ 10 mm	○	○	○	○	○	○	OZB-A4633	
	HSWF 25×/∅ 9 mm	○	○	○	○	○	○	OZB-A4634	
Auxiliary objectives	0,5×	○	○	○	○	○	○	OZB-A4641	
	0,75×	○	○	○	○	○	○	OZB-A4644	
	1,5×	○	○	○	○	○	○	OZB-A4642	
	2,0×	○	○	○	○	○	○	OZB-A4643	
C-Mount	1× (focus adjustable)		✓		✓		✓	OZB-A4809	
	0,3× (focus adjustable)		○		○		○	OZB-A4810	
	0,5× (focus adjustable)		○		○		○	OZB-A4811	
Stand	Pillar style, with 3 W-LED illumination (transmitted + incident)	✓	✓						
	Pillar style, with 3 W-LED illumination (transmitted)			✓	✓				
	Arm curved, incl. handle, with 3 W-LED illumination (transmitted + incident)					✓	✓		
Ring illumination	Integrated into the microscope head as incident illumination			✓	✓				
Stage plate	Frosted glass/∅ 95 mm	✓	✓	✓	✓	✓	✓	OZB-A4805	
	Black-white/∅ 95 mm	✓	✓	✓	✓	✓	✓	OZB-A4806	
External illumination	Please find the information about external illumination units in the catalogue on page 83 and on the internet								

✓ = Included with delivery

○ = Option



04

LAB LINE

Stereo zoom microscope with or without halogen illumination, for the laboratory, training centres, quality control or agriculture

Features

- The KERN OZL-45 stereo zoom microscope series will impress you with its excellent optical characteristics, easy operation and high level of ergonomic working comfort
- The Halogen incident and transmitted illumination included as standard guarantees the very best illumination of your sample
- The high-quality optics, together with a large working surface offers the highest level of comfort for your applications
- The zoom objective offers you continuous magnification from 7,5×–50×
- The KERN OZL-45 series is available as a binocular version
- The pillar stand offers you the highest level of flexibility and the freedom to remove the microscope head and to integrate it into other modular systems, for example into a universal stand

- A large selection of eyepieces, external illumination units as well as auxiliary objectives are available as accessories
- A protective dust cover, eye cups, as well as multi-lingual user instructions are included in the scope of delivery
- Please find detailed information in the following model outfit list

Scope of application

- In vitro fertilisation, detection of parasites, zoology and botany, tissue preparation, section, quality control


Applications/Samples

- Samples with focus on three-dimensional impression, zoom with variable magnification (depth, thickness), e.g. insects, seeds, circuit boards, components

Technical data

- Optical system: Greenough optics
- Brightness adjustable
- Tube 45° inclined
- Magnification ratio: 6,7:1
- Interpupillary distance 55 – 75 mm
- Diopter adjustment: Both-sided
- Overall dimensions W×D×H 330×270×460 mm
- Net weight approx. 5 kg

STANDARD



Model	Standard configuration					
	Tube	Eyepiece	Field of view mm	Objective Zoom	Stand	Illumination
KERN						
OZL 45 1	Binocular	HSWF 10×/ø 23 mm	ø 33 – 5	0,75× – 5,0×	Pillar style	12 V / 10 W Halogen (incident) 12 V / 10 W Halogen (transmitted)

Eyepiece	Specifications - Objectives				
	Magnification	Standard 1,0×	Auxiliary objectives		
			0,5×	0,75×	2,0×
HWF 5×	Total magnification	3,75× - 25×	1,875× - 12,5×	2,813× - 18,75×	7,5× - 50×
	Field of view mm	∅ 31 - 4,6	∅ 61,3 - 9,2	∅ 41,3 - 6,1	∅ 16 - 2,5
HSWF 10×	Total magnification	7,5× - 50×	3,75× - 25×	5,625× - 37,5×	15× - 100×
	Field of view mm	∅ 33 - 5	∅ 65 - 10	∅ 44 - 6,7	∅ 16 - 2,5
HWF 15×	Total magnification	11,25× - 75×	5,625× - 37,5×	8,438× - 56,25×	22,5× - 150×
	Field of view mm	∅ 24 - 4,2	∅ 48 - 8,5	∅ 32 - 5,6	∅ 12 - 2
HSWF 20×	Total magnification	15× - 100×	7,5× - 50×	11,25× - 75×	30× - 200×
	Field of view mm	∅ 20 - 3,5	∅ 40 - 7	∅ 26,7 - 4,7	∅ 10 - 1,8
HWF 25×	Total magnification	18,75× - 125×	9,375× - 62,5×	14,063× - 93,75×	37,5× - 255×
	Field of view mm	∅ 15,8 - 2,4	∅ 31,5 - 4,8	∅ 24,1 - 3,2	∅ 7,9 - 1,2
Working distance		113 mm	177 mm	117 mm	35 mm
Maximum sample height		120 mm	60 mm	90 mm	165 mm

Model outfit		Model KERN	Order number	
		OZL 451		
Eyepieces (30,0 mm)	HWF 5×/∅ 23,2 mm	○ ○	OZB-A4112	
	HSWF 10×/∅ 23 mm	✓ ✓	OZB-A4118	
	HWF 15×/∅ 15 mm	○ ○	OZB-A4119	
	HSWF 20×/∅ 14,5 mm	○ ○	OZB-A4120	
	HWF 25×/∅ 11,7 mm	○ ○	OZB-A4121	
Auxiliary objectives	0,5×	○	OZB-A4209	
	0,75×	○	OZB-A4210	
	2,0×	○	OZB-A4206	
Stand	Pillar style, with 12 V/ 10 W Halogen Illumination (transmitted + incident)	✓		
Stage plate	Frosted glass/∅ 95 mm	✓	OZB-A4805	
	Black-white/∅ 95 mm	✓	OZB-A4806	
Illumination	12 V/ 10 W spare bulb (transmitted + incident)	✓	OZB-A4804	
Mechanical stage (Pre-assembling on request)	Stage size W×D 180×155 mm, Travel 75×55 mm, for transmitted and incident illumination	○	OZB-A4605	
External illumination	Please find the information about external illumination units in the catalogue on page 83 and on the internet			

✓ = Included with delivery

○ = Option



04

LAB LINE

The practical and flexible stereo zoom microscope with integrated LED ring illumination and large zoom range

Features

- The KERN OZL-456 stereo zoom microscope series will impress you with its excellent optical characteristics, easy operation and its integrated LED ring illumination unit
- The highlight of the KERN OZL-456 is the strong, continuously dimmable, integrated LED ring illumination in the objective housing, which ensures uniform, shadow-free illumination. An LED transmitted light variant is also included
- With its built-in, top-quality optics and powerful, integrated LED illumination unit, this model is a special all-rounder for all areas of application
- The zoom objective offers you continuous magnification from 7,5× – 50×
- As standard, the KERN OZL-45R series is provided as a binocular version with 10× eyepieces with a field of view with a diameter of 23 mm
- The arm curved stand gives you a large working area as well as a precise adjustment mechanism
- A large selection of eyepieces as well as auxiliary objectives are available as accessories
- A protective dust cover, eye cups, as well as multi-lingual user instructions are included in the scope of delivery
- Please find detailed information in the following model outfit list

Scope of application

- In vitro fertilisation, detection of parasites, zoology and botany, tissue preparation, section, quality control

Applications/Samples

- Samples with focus on three-dimensional impression, zoom with variable magnification (depth, thickness), e.g. insects, seeds, circuit boards, components

Technical data

- Optical system: Greenough optics
- Incident illumination dimmable
- Tube 45° inclined
- Magnification ratio: 6,7:1
- Interpupillary distance 55 – 75 mm
- Diopter adjustment: Both-sided
- Overall dimensions W×D×H 320×275×420 mm
- Net weight approx. 4,5 kg

STANDARD



Model	Standard configuration					
	Tube	Eyepiece	Field of view mm	Objective Zoom	Stand	Illumination
KERN OZL 456	Binocular	HSWF 10×/ø 23 mm	ø 33 – 5	0,75× – 5,0×	Arm curved	1 W LED (incident); 0,21 W LED (transmitted)

Stereo zoom microscope KERN OZL-45R

Eyepiece	Specifications - Objectives		
	Magnification	Standard 1,0×	Auxiliary objectives
			2,0×
HWF 5×	Total magnification	3,75× - 25×	7,5× - 50×
	Field of view mm	∅ 31 - 4,6	∅ 16 - 2,5
HSWF 10×	Total magnification	7,5× - 50×	15× - 100×
	Field of view mm	∅ 33 - 5	∅ 16 - 2,5
HWF 15×	Total magnification	11,25× - 75×	22,5× - 150×
	Field of view mm	∅ 24 - 4,2	∅ 12 - 2
HSWF 20×	Total magnification	15× - 100×	30× - 200×
	Field of view mm	∅ 20 - 3,5	∅ 10 - 1,8
HWF 25×	Total magnification	18,75× - 125×	37,5× - 255×
	Field of view mm	∅ 15,8 - 2,4	∅ 7,9 - 1,2
Working distance		113 mm	35 mm
Maximum sample height		45 mm	95 mm

04

Model outfit		Model KERN	Order number
		OZL 456	
Eyepieces (30,0 mm)	HWF 5×/∅ 23,2 mm	○ ○	OZB-A4112
	HSWF 10×/∅ 23 mm	✓ ✓	OZB-A4118
	HWF 15×/∅ 15 mm	○ ○	OZB-A4119
	HSWF 20×/∅ 14,5 mm	○ ○	OZB-A4120
	HWF 25×/∅ 11,7 mm	○ ○	OZB-A4121
Auxiliary objectives	2,0×	○	OZB-A4206
Stand	Arm curved, with LED illumination (0,21 W transmitted + 1 W incident)	✓	
Stage plate	Frosted glass/∅ 95 mm	✓	OZB-A4805
	Black-white/∅ 95 mm	✓	OZB-A4806
Mechanical stage (Pre-assembling on request)	Stage size W×D 180×155 mm, Travel 75×55 mm, for transmitted and incident illumination	○	OZB-A4605
External illumination	Please find the information about external illumination units in the catalogue on page 83 and on the internet		

✓ = Included with delivery

○ = Option



04

LAB LINE

First-class optics and strong illumination combined with a high level of flexibility

Features

- The KERN OZM series is a range of excellent stereo zoom microscopes with above-average optical features
- The ergonomic shape allows a simple, effortless working over a period of several hours
- The extraordinarily strong and continuously dimmable 3 W LED reflected and transmitted illumination ensures a flexible and particularly good level of illumination for your sample
- With its large working distance, an extra large field of view and its brilliant resolution, the KERN OZM provides sharp, high-contrast, colour-true images
- The zoom objective gives you continuous magnification from 7,5×–45×
- There is a choice of a binocular model as well as a trinocular model for connecting a camera for documentation purposes and for quality reports
- The pillar stand is particularly flexible due to its variable and sturdy adjustment mechanism and therefore enables ergonomic working procedures
- A large selection of eyepieces, (universal) stands, a darkfield kit, external illumination units as well as auxiliary objectives and more are available as accessories
- A protective dust cover, eye cups, as well as multi-lingual user instructions are included in the scope of delivery
- A C-mount adapter is required to connect a camera to the trinocular version. You can select this adapter from the following model outfit list
- Please find detailed information in the following model outfit list

Scope of application

- In vitro fertilisation, detection of parasites, zoology and botany, tissue preparation, section, quality control, electronics and semiconductor industry, assembly and repair

Applications/Samples

- Samples with focus on three-dimensional impression, zoom with variable magnification (depth, thickness), e.g. insects, seeds, circuit boards, components

Technical data

- Optical system: Greenough optics
- Brightness adjustable (separate)
- Tube 45° inclined
- Magnification ratio: 6,4:1
- Light distribution OZM 543/544: 50:50
- Interpupillary distance 52 – 76 mm
- Diopter adjustment: Both-sided
- Overall dimensions W×D×H 330×285×440 mm
- Net weight approx. 4,5 kg

STANDARD



OPTION



Model	Standard configuration					
	Tube	Eyepiece	Field of view mm	Objective Zoom	Stand	Illumination
KERN						
OZM 542	Binocular	HSWF 10×/ø 23 mm	ø 32,8 – 5,1	0,7× – 4,5×	Pillar style	3 W LED (incident); 3 W LED (transmitted)
OZM 544	Trinocular	HSWF 10×/ø 23 mm	ø 32,8 – 5,1	0,7× – 4,5×	Pillar style	3 W LED (incident); 3 W LED (transmitted)

Eyepiece	Specifications - Objectives					
	Magnification	Standard 1,0×	Auxiliary objectives			
			0,5×	0,7×	1,5×	2×
HSWF 10×	Total magnification	7× - 45×	3,5× - 22,5×	4,9× - 31,5×	10,5× - 67,5×	14× - 90×
	Field of view mm	∅ 32,8 - 5,1	∅ 65,7 - 10,2	∅ 46,9 - 7,3	∅ 21,9 - 3,4	∅ 16,4 - 2,6
SWF 15×	Total magnification	10,5× - 67,5×	5,3× - 33,8×	7,4× - 47,2×	15,8× - 101,3×	21× - 135×
	Field of view mm	∅ 24,3 - 3,8	∅ 48,6 - 7,6	∅ 34,7 - 5,4	∅ 16,2 - 2,5	∅ 12,1 - 1,9
SWF 20×	Total magnification	14× - 90×	7× - 45×	9,8× - 63×	21× - 135×	28× - 180×
	Field of view mm	∅ 20 - 3,1	∅ 40 - 6,2	∅ 28,6 - 4,4	∅ 13,3 - 2,1	∅ 10 - 1,6
SWF 30×	Total magnification	21× - 135×	10,5× - 67,5×	14,7× - 94,5×	31,5× - 202,5×	42× - 270×
	Field of view mm	∅ 12,9 - 2	∅ 25,7 - 4	∅ 18,4 - 2,9	∅ 8,6 - 1,6	∅ 6,4 - 1
Working distance		110 mm	195 mm	145 mm	50 mm	35 mm
Maximum sample height		130 mm	30 mm	65 mm	160 mm	175 mm

Model outfit		Model KERN		Order number	
		OZM 542	OZM 544		
Eyepieces (30,0 mm)	HSWF 10×/∅ 23 mm	✓✓	✓✓	OZB-A5503	
	SWF 15×/∅ 17 mm	○○	○○	OZB-A5504	
	SWF 20×/∅ 14 mm	○○	○○	OZB-A5505	
	SWF 30×/∅ 9 mm	○○	○○	OZB-A5506	
	HSWF 10×/∅ 23 mm (reticule 0,1 mm)	○	○	OZB-A5512	
	SWF 15×/∅ 17 mm (reticule 0,05 mm)	○	○	OZB-A5513	
	SWF 20×/∅ 14 mm (reticule 0,05 mm)	○	○	OZB-A5514	
Achromatic auxiliary objectives	0,5×	○	○	OZB-A5612	
	0,7×	○	○	OZB-A5613	
	1,5×	○	○	OZB-A5615	
	2,0×	○	○	OZB-A5616	
	Soldering protection lens	○	○	OZB-A5614	
C-Mount	0,3× (focus adjustable)		○	OZB-A5701	
	0,5× (focus adjustable)		○	OZB-A5702	
	1,0× (focus adjustable)		○	OZB-A5703	
	1,0× (with micrometer) only in combination with OZB-A5703		○	OZB-A5704	
	for SLR cameras (Nikon)		○	OZB-A5706	
	for SLR cameras (Olympus)		○	OZB-A5707	
	for SLR cameras (Canon)		○	OZB-A5708	
Darkfield unit	Darkfield unit	○	○	OZB-A4601	
Object clamp	Object clamp	○	○	OBB-A6205	
Stand	Pillar style, without illumination				
	Pillar style, with 3 W LED illumination (transmitted + incident)	✓	✓		
	Please find more stands in the catalogue on page 79 and on the internet				
Stage plate	Frosted glass/∅ 94,5 mm	✓	✓	OZB-A5192	
	Black-white/∅ 94,5 mm	✓	✓	OZB-A5191	
	Glass/∅ 94,5 mm	○	○	OZB-A5190	
Mechanical stage (Pre-assembling on request)	Stage size W×D 188×160 mm, Travel 76×65 mm, for transmitted and incident illumination	○	○	OZB-A5781	
	Stage size W×D 180×175 mm, Travel 100×86 mm, for incident illumination only	○	○	OZB-A5782	
External illumination	Please find the information about external illumination units in the catalogue on page 83 and on the internet				



Trinocular version

04

LAB LINE

Professional and powerful – thanks to its extremely large magnification range, strong illumination and first-class optics

Features

- The KERN OZP stereo zoom microscope stands out through its above-average magnification range and its robust shape which is also ergonomic, it enables effortless, simple working over a period of several hours
- The KERN OZP series is available as a strong, continuously adjustable 3 W LED reflected and transmitted light variant for the very best illumination of your sample or as a variant without illumination
- With its large working distance, an extra large field of view and brilliant resolution, the KERN OZP provides sharp, high-contrast and colour-true images
- The extremely large, continuously adjustable magnification range from 6 to 55 times magnification means that you can work quickly and effectively
- There is a choice of a binocular model as well as a trinocular model for connecting a camera for documentation purposes and for quality reports
- The pillar stand is particularly flexible due to its variable and sturdy adjustment mechanism and therefore enables ergonomic working procedures
- A large selection of eyepieces, (universal) stands, a darkfield kit, external illumination units as well as auxiliary objectives and more are available as accessories
- A protective dust cover, eye cups, as well as multi-lingual user instructions are included in the scope of delivery
- A C-mount adapter is required to connect a camera to the trinocular version. You can select this adapter from the following model outfit list
- Please find detailed information in the following model outfit list

Scope of application

- Zoology and botany, quality control, electronics and semiconductor industry, assembly and repair

Applications/Samples

- Samples with focus on three-dimensional impression, zoom with variable magnification (depth, thickness), e.g. insects, seeds, circuit boards, components

Technical data

- Optical system: Greenough optics
- Brightness adjustable (separate)
- Tube: 35° inclined
- Magnification ratio: 9,2:1
- Light distribution OZP 557/558: 50:50
- Interpupillary distance 52 – 76 mm
- Diopter adjustment: Both-sided
- Overall dimensions W×D×H 330×285×470 mm
- Net weight approx. 4,5 kg

STANDARD



OPTION



Model	Standard configuration					
	Tube	Eyepiece	Field of view mm	Objective Zoom	Stand	Illumination
KERN OZP 556	Binocular	HSWF 10×/ø 23 mm	ø 38,3 – 4,2	0,6× – 5,5×	Pillar style	3 W LED (incident); 3 W LED (transmitted)
OZP 558	Trinocular	HSWF 10×/ø 23 mm	ø 38,3 – 4,2	0,6× – 5,5×	Pillar style	3 W LED (incident); 3 W LED (transmitted)

Eyepiece	Specifications – Objectives					
	Magnification	Standard 1,0×	Auxiliary objectives			
			0,5×	0,7×	1,5×	2×
HSWF 10×	Total magnification	6× – 55×	3× – 27,5×	4,2× – 38,5×	9× – 82,5×	12× – 110×
	Field of view mm	∅ 38,3 – 4,2	∅ 76,7 – 8,4	∅ 54,8 – 6	∅ 25,6 – 2,8	∅ 19,2 – 2,1
SWF 15×	Total magnification	9× – 82,5×	4,5× – 41,25×	6,3× – 57,75×	13,5× – 123,75×	18× – 165×
	Field of view mm	∅ 28,3 – 3,1	∅ 56,7 – 6,2	∅ 40,5 – 4,4	∅ 18,9 – 2,1	∅ 14,2 – 1,5
SWF 20×	Total magnification	12× – 110×	6× – 55×	8,4× – 77×	18× – 165×	24× – 220×
	Field of view mm	∅ 23,3 – 2,5	∅ 46,7 – 5,1	∅ 33,3 – 3,6	∅ 15,6 – 1,7	∅ 11,7 – 1,3
SWF 30×	Total magnification	18× – 165×	9× – 82,5×	12,6× – 115,5×	27× – 247,5×	36× – 330×
	Field of view mm	∅ 15 – 1,6	∅ 30 – 3,3	∅ 21,4 – 2,3	∅ 10 – 1,1	∅ 7,5 – 0,8
Working distance		108 mm	195 mm	145 mm	50 mm	35 mm
Maximum sample height		110 mm	10 mm	45 mm	140 mm	150 mm

Model outfit		Model KERN		Order number	
		OZP 556	OZP 558		
Eyepieces (30,0 mm)	HSWF 10×/∅ 23 mm	✓✓	✓✓	OZB-A5503	
	SWF 15×/∅ 17 mm	○○	○○	OZB-A5504	
	SWF 20×/∅ 14 mm	○○	○○	OZB-A5505	
	SWF 30×/∅ 9 mm	○○	○○	OZB-A5506	
	HSWF 10×/∅ 23 mm (reticule 0,1 mm)	○	○	OZB-A5512	
	SWF 15×/∅ 17 mm (reticule 0,05 mm)	○	○	OZB-A5513	
	SWF 20×/∅ 14 mm (reticule 0,05 mm)	○	○	OZB-A5514	
Achromatic auxiliary objectives	0,5×	○	○	OZB-A5612	
	0,7×	○	○	OZB-A5613	
	1,5×	○	○	OZB-A5615	
	2,0×	○	○	OZB-A5616	
	Soldering protection lens	○	○	OZB-A5614	
C-Mount	0,3× (focus adjustable)		○	OZB-A5701	
	0,5× (focus adjustable)		○	OZB-A5702	
	1,0× (focus adjustable)		○	OZB-A5703	
	1,0× (with micrometer) only in combination with OZB-A5703		○	OZB-A5704	
	for SLR cameras (Nikon)		○	OZB-A5706	
	for SLR cameras (Olympus)		○	OZB-A5707	
	for SLR cameras (Canon)		○	OZB-A5708	
Darkfield unit	Darkfield unit	○	○	OZB-A4601	
Object clamp	Object clamp	○	○	OBB-A6205	
Stand	Pillar style, without illumination				
	Pillar style, with 3 W LED illumination (transmitted + incident)	✓	✓		
	Please find more stands in the catalogue on page 79 and on the internet				
Stage plate	Frosted glass/∅ 94,5 mm		✓	OZB-A5192	
	Black-white/∅ 94,5 mm	✓	✓	OZB-A5191	
	Glass/∅ 94,5 mm		○	OZB-A5190	
Mechanical stage (Pre-assembling on request)	Stage size W×D 188×160 mm, Travel 76×65 mm, for incident and transmitted illumination	○	○	OZB-A5781	
	Stage size W×D 180×175 mm, Travel 100×86 mm, for incident illumination only	○	○	OZB-A5782	
External illumination	Please find the information about external illumination units in the catalogue on page 83 and on the internet				



OZR 564
With illumination



OZR 563
Without illumination

04

PROFESSIONAL LINE

Professional stereo zoom microscope with parallel optics for excellent images, depth of field, contrast and fatigue-free working

Features

- The KERN OZR series is a special, high-quality stereo zoom microscope with parallel optics for demanding analyses
- The KERN OZR series is available as a strong, continuously adjustable 3 W LED reflected and transmitted light variant for the very best illumination of your sample or as a variant without illumination
- The parallel optical system is a high-quality optical system and provides excellent images with the best contrast, colour and depth of field with fatigue-free working. Refocusing is also only necessary in very few cases when magnifying the zoom
- The continuously adjustable magnification range from 8 to 50 times magnification means that you can work quickly and effectively
- As standard, the models of the KERN OZR series are trinocular and are therefore equipped for connecting a camera for documentation purposes and for quality reports
- The pillar stand is particularly flexible due to its variable and sturdy adjustment mechanism and therefore enables ergonomic working procedures
- A large selection of eyepieces, (universal) stands, a darkfield kit, external illumination units as well as auxiliary objectives and more are available as accessories
- A protective dust cover, eye cups, as well as multi-lingual user instructions are included in the scope of delivery
- A C-mount adapter is required to connect a camera to the trinocular version. You can select this adapter from the following model outfit list
- Please find detailed information in the following model outfit list

Scope of application

- In vitro fertilisation, detection of parasites, zoology and botany, tissue preparation, section, quality control, electronics and semiconductor industry, assembly and repair

Applications/Samples

- Samples with focus on three-dimensional impression, zoom with variable magnification (depth, thickness), e.g. insects, seeds, circuit boards, components

Technical data

- Optical system: Parallel optics
- Brightness adjustable (separate)
- Tube 45° inclined
- Magnification ratio: 6,25:1
- Light distribution 50:50
- Interpupillary distance 52 – 76 mm
- Diopter adjustment: Both-sided
- Overall dimensions W×D×H 305×300×540 mm
- Net weight approx. 5,5 kg

STANDARD



OPTION



Model	Standard configuration						
	Tube	Eyepiece	Field of view mm	Objective Zoom	Stand	Illumination	
KERN							
OZR 563	Trinocular	HWF 10×/ø 22 mm	ø 27,5 - 4,4	0,8× - 5×	Pillar style	-	↓
OZR 564	Trinocular	HWF 10×/ø 22 mm	ø 27,5 - 4,4	0,8× - 5×	Pillar style	3 W LED (incident); 3 W LED (transmitted)	↓

Stereo zoom microscope KERN OZR-5

Eyepiece	Specifications - Objectives				
	Magnification	Standard Plan 1,0×	Achromatic objectives		
			0,5×	0,7×	1,5× (Auxiliary)
HWF 10×	Total magnification	8× - 50×	4× - 25×	5,6× - 35×	12× - 75×
	Field of view mm	∅ 27,5 - 4,4	∅ 55 - 8,8	∅ 39,3 - 6,3	∅ 18,33 - 2,93
SWF 15×	Total magnification	12× - 75×	6× - 37,5×	8,4× - 5,5×	18× - 112,5×
	Field of view mm	∅ 21,25 - 3,4	∅ 42,5 - 6,8	∅ 30,36 - 4,86	∅ 14,17 - 2,27
SWF 20×	Total magnification	16× - 100×	8× - 50×	11,2× - 70×	24× - 150×
	Field of view mm	∅ 17,5 - 2,8	∅ 35 - 5,6	∅ 25 - 4	∅ 11,67 - 1,87
SWF 30×	Total magnification	24× - 150×	12× - 75×	16,8× - 105×	36× - 225×
	Field of view mm	∅ 11,25 - 1,8	∅ 22,5 - 3,6	∅ 16,1 - 2,57	∅ 7,5 - 1,2
Working distance		91 mm	186 mm	135 mm	40 mm
Maximum sample height		100 mm	30 mm	80 mm	125 mm

Model outfit		Model KERN		Order number	
		OZR 563	OZR 564		
Eyepieces (30,0 mm)	HWF 10×/∅ 22 mm	✓✓	✓	OZB-A5502	
	SWF 15×/∅ 17 mm	○○	○○	OZB-A5504	
	SWF 20×/∅ 14 mm	○○	○○	OZB-A5505	
	SWF 30×/∅ 9 mm	○○	○○	OZB-A5506	
	HWF 10×/∅ 22 mm (reticule 0,1 mm)	○	○	OZB-A5511	
	SWF 15×/∅ 17 mm (reticule 0,05 mm)	○	○	OZB-A5513	
	SWF 20×/∅ 14 mm (reticule 0,05 mm)	○	○	OZB-A5514	
Plan achromatic objective	1,0×	✓	✓	OZB-A5603	
Achromatic objectives	0,5×	○	○	OZB-A5601	
	0,7×	○	○	OZB-A5602	
	1,5× Only in combination with OZB-A5603	○	○	OZB-A5604	
Trinocular beamsplitter	Division 100:0	✓	✓	OZB-A5401	
	Division 50:50	○	○	OZB-A5402	
C-Mount	0,3× (focus adjustable)	○	○	OZB-A5701	
	0,5× (focus adjustable)	○	○	OZB-A5702	
	1,0× (focus adjustable)	○	○	OZB-A5703	
	1,0× (with micrometer) only in combination with OZB-A5703	○	○	OZB-A5704	
	for SLR cameras (Nikon)	○	○	OZB-A5706	
	for SLR cameras (Olympus)	○	○	OZB-A5707	
	for SLR cameras (Canon)	○	○	OZB-A5708	
Darkfield unit	Darkfield unit		○	OZB-A4601	
Object clamp	Object clamp	○	○	OBB-A6205	
Stand	Pillar style, without illumination	✓			
	Pillar style, with 3 W LED illumination (transmitted + incident)		✓		
Stage plate	Frosted glass/∅ 94,5 mm		✓	OZB-A5192	
	Black-white/∅ 94,5 mm	✓	✓	OZB-A5191	
	Glass/∅ 94,5 mm		○	OZB-A5190	
Mechanical stage (Pre-assembling on request)	Stage size W×D 188×160 mm, Travel 76×65 mm, for incident and transmitted illumination	○	○	OZB-A5781	
	Stage size W×D 180×175 mm, Travel 100×86 mm, for incident illumination only	○	○	OZB-A5782	
External illumination	Please find the information about external illumination units in the catalogue on page 83 and on the internet				

✓ = Included with delivery

○ = Option



OZS 574
With illumination



OZS 573
Without illumination

PROFESSIONAL LINE

High-quality parallel optics for the best images, depth of field and contrast – with extra large zoom range

Features

- The devices in the KERN OZS series are special, high-quality stereo zoom microscopes with parallel optics and an above-average zoom range for demanding analyses
- The KERN OZS series is available as a strong, continuously adjustable 3 W LED reflected and transmitted light variant for the very best illumination of your sample or as a variant without illumination
- The parallel optics is a high-quality optical system and provides excellent images with the best contrast, colour and depth of field with fatigue-free working
- The exceptionally large, adjustable magnification range from 8 to 80 times magnification gives you continuous zoom for the views you need
- As standard, the models of the KERN OZS series are trinocular and therefore equipped for connecting a camera for documentation purposes and for quality reports
- These models are particularly flexible due to the modular construction, the pillar stand as well as the powerful, longlife LED reflected and transmitted illumination which can be integrated as an option
- A large selection of eyepieces, (universal) stands, a darkfield kit, external illumination units as well as auxiliary objectives and more are available as accessories
- A protective dust cover, eye cups, as well as multi-lingual user instructions are included in the scope of delivery
- A C-mount adapter is required to connect a camera. You can select this adapter from the following model outfit list
- Please find detailed information in the following model outfit list

Scope of application

- In vitro fertilisation, detection of parasites, zoology and botany, tissue preparation, section, quality control, electronics and semiconductor industry, assembly and repair

Applications/Samples

- Samples with focus on three-dimensional impression, zoom with variable magnification (depth, thickness), e.g. insects, seeds, circuit boards, components

Technical data

- Optical system: Parallel optics
- Brightness adjustable (separate)
- Tube 45° inclined
- Magnification ratio: 10:1
- Light distribution 50:50
- Interpupillary distance 52 – 76 mm
- Diopter adjustment: Both-sided
- Overall dimensions W×D×H 305×300×540 mm
- Net weight approx. 5,5 kg

STANDARD



OPTION



Model	Standard configuration						
	Tube	Eyepiece	Field of view mm	Objective Zoom	Stand	Illumination	
KERN							
OZS 573*	Trinocular	HWF 10×/ø 22 mm	ø 27,5 – 2,75	0,8× – 8×	Pillar style	-	⬇
OZS 574	Trinocular	HWF 10×/ø 22 mm	ø 27,5 – 2,75	0,8× – 8×	Pillar style	3 W LED (incident); 3 W LED (transmitted)	

Stereo zoom microscope KERN OZS-5

Eyepiece	Specifications - Objectives				
	Magnification	Standard Plan 1,0×	Achromatic objectives		
			0,5×	0,7×	1,5× (Auxiliary)
HWF 10×	Total magnification	8× - 80×	4× - 40×	5,6× - 56×	12× - 120×
	Field of view mm	∅ 27,5 - 2,75	∅ 55 - 5,5	∅ 39,3 - 3,93	∅ 18,33 - 1,83
SWF 15×	Total magnification	12× - 120×	6× - 60×	8,4× - 84×	18× - 180×
	Field of view mm	∅ 21,25 - 2,13	∅ 42,5 - 4,25	∅ 30,36 - 3,04	∅ 14,17 - 1,42
SWF 20×	Total magnification	16× - 160×	8× - 80×	11,2× - 112×	24× - 240×
	Field of view mm	∅ 17,5 - 1,75	∅ 35 - 3,5	∅ 25 - 2,5	∅ 11,67 - 1,17
SWF 30×	Total magnification	24× - 240×	12× - 120×	16,8× - 168×	36× - 360×
	Field of view mm	∅ 11,25 - 1,13	∅ 22,5 - 2,25	∅ 16,1 - 1,61	∅ 7,5 - 0,75
Working distance		91 mm	186 mm	135 mm	40 mm
Maximum sample height		100 mm	30 mm	80 mm	125 mm

Model outfit		Model KERN		Order number	
		OZS 573	OZS 574		
Eyepieces (30,0 mm)	HWF 10×/∅ 22 mm	✓✓	✓	OZB-A5502	
	SWF 15×/∅ 17 mm	○○	○○	OZB-A5504	
	SWF 20×/∅ 14 mm	○○	○○	OZB-A5505	
	SWF 30×/∅ 9 mm	○○	○○	OZB-A5506	
	HWF 10×/∅ 22 mm (reticule 0,1 mm)	○	○	OZB-A5511	
	SWF 15×/∅ 17 mm (reticule 0,05 mm)	○	○	OZB-A5513	
	SWF 20×/∅ 14 mm (reticule 0,05 mm)	○	○	OZB-A5514	
Plan achromatic objective	1,0×	✓	✓	OZB-A5603	
Achromatic objectives	0,5×	○	○	OZB-A5601	
	0,7×	○	○	OZB-A5602	
	1,5× Only in combination with OZB-A5603	○	○	OZB-A5604	
Trinocular beamsplitter	Division 100:0	✓	✓	OZB-A5401	
	Division 50:50	○	○	OZB-A5402	
C-Mount	0,3× (focus adjustable)	○	○	OZB-A5701	
	0,5× (focus adjustable)	○	○	OZB-A5702	
	1,0× (focus adjustable)	○	○	OZB-A5703	
	1,0× (with micrometer) only in combination with OZB-A5703	○	○	OZB-A5704	
	for SLR cameras (Nikon)	○	○	OZB-A5706	
	for SLR cameras (Olympus)	○	○	OZB-A5707	
	for SLR cameras (Canon)	○	○	OZB-A5708	
Darkfield unit	Darkfield unit		○	OZB-A4601	
Object clamp	Object clamp	○	○	OBB-A6205	
Stand	Pillar style, without illumination	✓			
	Pillar style, with 3 W LED illumination (transmitted + incident)		✓		
Stage plate	Frosted glass/∅ 94,5 mm		✓	OZB-A5192	
	Black-white/∅ 94,5 mm	✓	✓	OZB-A5191	
	Glass/∅ 94,5 mm		○	OZB-A5190	
Mechanical stage (Pre-assembling on request)	Stage size W×D 188×160 mm, Travel 76×65 mm, for incident and transmitted illumination	○	○	OZB-A5781	
	Stage size W×D 180×175 mm, Travel 100×86 mm, for incident illumination only	○	○	OZB-A5782	
External illumination	Please find the information about external illumination units in the catalogue on page 83 and on the internet				

✓ = Included with delivery

○ = Option



Plug in for power supply

04

PROFESSIONAL LINE

The coaxial with parallel optics for excellent contrast and depth of field

Features

- The KERN OZC has been developed specially to meet requirements for high contrast and depth of field. These devices are absolutely essential for the LCD/LED electronics industry
- The coaxial 2 W LED reflected illumination which is integrated into the objective guarantees selective depth of focus, so that even low-lying sections can be recorded (e.g. the bottom of a drilled hole)
- The parallel optics is a high-quality optical system and provides excellent images with the best contrast, colour and depth of field with fatigue-free working. Refocusing is also only necessary in very few cases when magnifying the zoom
- The large, adjustable magnification range from 18 to 65 times gives you continuous zoom when you are working
- As standard, the KERN OZC is trinocular and is therefore equipped for connecting a camera for documentation purposes and for quality reports
- The arm curved stand ensures precise adjustment and focusing of your sample. The stand base is particularly heavy and therefore offers a high level of stability and an extremely secure footing
- A large selection of eyepieces and a mechanical stage extension are available as accessories
- A protective dust cover, eye cups, as well as multi-lingual user instructions are included in the scope of delivery
- A C-mount adapter is required to connect a camera. You can select this adapter from the following model outfit list
- Please find detailed information in the following model outfit list

Scope of application

- LCD/LED electronics, semiconductor technology

Applications/Samples

- Samples with focus on three-dimensional impression (depth, thickness), zoom for variable magnification, e.g. LCD/LED electronics, circuit boards, ICs

Technical data

- Optical system: Parallel optics
- Brightness adjustable
- Tube 45° inclined
- Magnification ratio: 3,6:1
- Light distribution 50:50
- Interpupillary distance 52 - 76 mm
- Diopter adjustment: Both-sided
- Overall dimensions W×D×H 305×180×405 mm
- Net weight approx. 6,6 kg.

STANDARD



OPTION



Model	Standard configuration					
	Tube	Eyepiece	Field of view mm	Objective Zoom	Stand	Illumination
KERN						
OZC 583	Trinocular	HSWF 10×/ø 23 mm	ø 12,78 - 3,5	1,8× - 6,5×	Arm curved	2 W LED (coaxial incident)

*** ONLY WHILE STOCKS LAST**

Price reduction

Coaxial microscope KERN OZC-5

Eyepiece	Specifications - Objectives	
	Magnification	Standard 1,0×
HWF 10×	Total magnification	18× - 65×
	Field of view mm	∅ 12,78 - 3,5
SWF 15×	Total magnification	27× - 97,5×
	Field of view mm	∅ 9,5 - 2,6
SWF 20×	Total magnification	36× - 130×
	Field of view mm	∅ 7,78 - 2,2
SWF 30×	Total magnification	54× - 195×
	Field of view mm	∅ 5 - 1,4
Working distance		92 mm
Maximum sample height		35 mm

Model outfit		Model KERN	Order number	
		OZC 583		
Eyepieces (30,0 mm)	HSWF 10×/∅ 23 mm	✓✓	OZB-A5503	
	SWF 15×/∅ 17 mm	○○	OZB-A5504	
	SWF 20×/∅ 14 mm	○○	OZB-A5505	
	SWF 30×/∅ 9 mm	○○	OZB-A5506	
	HSWF 10×/∅ 23 mm (reticule 0,1 mm)	○	OZB-A5512	
	SWF 15×/∅ 17 mm (reticule 0,05 mm)	○	OZB-A5513	
	SWF 20×/∅ 14 mm (reticule 0,05 mm)	○	OZB-A5514	
C-Mount	0,3× (focus adjustable)	○	OZB-A5701	
	0,5× (focus adjustable)	○	OZB-A5702	
	1,0× (focus adjustable)	○	OZB-A5703	
	1,0× (with micrometer) only in combination with OZB-A5703	○	OZB-A5704	
	for SLR cameras (Nikon)	○	OZB-A5706	
	for SLR cameras (Olympus)	○	OZB-A5707	
	for SLR cameras (Canon)	○	OZB-A5708	
Stand	Arm curved, without illumination	✓		
External illumination	Please find the information about external illumination units in the catalogue on page 83 and on the internet			

✓ = Included with delivery

○ = Option



OZG 493



OZG 497 *



Backside of OZG 497



Tilt positions



Tilt positions

04

LAB LINE

The specialist for jewellers and the gem industry

Features

- The KERN OZG series has been specially developed for jewellers and mineral observations in the gem industry. Precious stones and gems can be checked and handled with this stereo zoom microscope
- You have a choice of a strong halogen transmitted illumination unit as well as halogen reflected and transmitted illumination variants, each with an additional frontal illumination
- As well as very good optical characteristics, these models form an ideal package with their dark field unit with object clamp which is included in the scope of delivery
- The KERN OZG 493 is fitted with a pillar stand as well as an integrated bright halogen light unit with reflected and transmitted illumination
- The KERN OZG 497 has a arm curved stand, which is extremely flexible as it can be tilted and rotated Together with the powerful illumination units, which also includes a single fiber. This is an ideal solution for jewellers and the gem industry

- A protective dust cover, eye cups, as well as multi-lingual user instructions are included in the scope of delivery
- A C-mount adapter is required to connect a camera to the trinocular version. You can select this adapter from the following model outfit list
- Please find detailed information in the following model outfit list

Scope of application

- Jewellers and gem industry

Applications/Samples

- Samples with focus on three-dimesnional impression (depth, thickness), zoom for variable magnification, special stand for processing workpieces e.g. gems, components, precious stones

Technical data

- Optical system: Greenough optics
- Brightness adjustable
- Tube 45° inclined
- Interpupillary distance 55 – 75 mm
- Diopter adjustment: Both-sided

OZG 493

- Magnification ratio: 5,1:1
- Overall dimensions W×D×H 310×170×350 mm
- Net weight approx. 5 kg

OZG 497

- Magnification ratio: 6,7:1
- Light distribution 50:50
- Overall dimensions W×D×H 340×235×480 mm
- Net weight approx. 11,5 kg

STANDARD



Model	Standard configuration						
	Tube	Eyepiece	Field of view mm	Objective Zoom	Stand	Illumination	
KERN							
OZG 493	Binocular	WF 10×/ø 20 mm	ø 26,7 – 5,6	0,7× – 3,6×	Pillar style	12 V/10 W Halogen (incident) 12 V/10 W Halogen (transmitted) 10 W Fluorescence (front illumination)	
OZG 497 *	Trinocular	HSWF 10×/ø 23 mm	ø 33 – 5,1	0,75× – 5,0×	Arm curved	12 V/10 W Halogen (transmitted) 10 W Fluorescence (front illumination including single fiber)	↓

! * ONLY WHILE STOCKS LAST

Gem microscope KERN OZG-4

OZG 493		
Specifications - Objectives		
Eyepiece	Magnification	Standard 1,0×
WF 5×	Total magnification	3,75× - 18×
	Field of view mm	∅ 26 - 6
WF 10×	Total magnification	7,5× - 36×
	Field of view mm	∅ 26,7 - 5,6
WF 15×	Total magnification	11,25× - 54×
	Field of view mm	∅ 19 - 4,5
WF 20×	Total magnification	15× - 72×
	Field of view mm	∅ 12,5 - 3
Working distance		86 mm

OZG 497		
Specifications - Objectives		
Eyepiece	Magnification	Standard 1,0×
HWF 5×	Total magnification	3,75× - 25×
	Field of view mm	∅ 31 - 4,6
HSWF 10×	Total magnification	7,5× - 50×
	Field of view mm	∅ 33 - 5
HWF 15×	Total magnification	11,25× - 75×
	Field of view mm	∅ 24 - 4,2
HSWF 20×	Total magnification	15× - 100×
	Field of view mm	∅ 20 - 3,5
HWF 25×	Total magnification	18,75× - 125×
	Field of view mm	∅ 15,8 - 2,4
Working distance		113 mm

04

Model outfit		Model KERN		Order number	
		OZG 493	OZG 497		
Eyepieces (30,5 mm)	WF 5×/∅ 16,2 mm	○ ○		OZB-A4101	
	WF 10×/∅ 20 mm	✓ ✓		OZB-A4102	
	WF 15×/∅ 15 mm	○ ○		OZB-A4103	
	WF 20×/∅ 10 mm	○ ○		OZB-A4104	
Eyepieces (30,0 mm)	HWF 5×/∅ 23,2 mm		○ ○	OZB-A4112	
	HSWF 10×/∅ 23 mm		✓ ✓	OZB-A4118	
	HWF 15×/∅ 15 mm		○ ○	OZB-A4119	
	HSWF 20×/∅ 14,5 mm		○ ○	OZB-A4120	
	HWF 25×/∅ 11,7 mm		○ ○	OZB-A4121	
C-Mount	1,0× (focus adjustable)		○	OZB-A4809	
	0,3× (focus adjustable)		○	OZB-A4810	
	0,5× (focus adjustable)		○	OZB-A4811	
Darkfield unit	Darkfield unit	✓	✓	OZB-A4601	
Object clamp	Object clamp (steel wire)	✓	✓	OZB-A4604	
Stand	Pillar style, with 12 V/10 W Halogen (transmitted + incident) and 10 W Fluorescent illumination (front)	✓			
	Arm curved, with 12 V/10 W Halogen (transmitted) and 10 W Fluorescent illumination (front) + Single fiber illumination		✓		
Stage plate	Frosted glass/∅ 95 mm	✓		OZB-A4805	
	Black-white/∅ 95 mm	✓		OZB-A4806	
Illumination	12 V/10 W spare bulb (transmitted + incident)	✓	✓	OZB-A4804	

✓ = Included with delivery

○ = Option



Otto Grunenberg, Head of Technical Department & Test Services



1 Pure competence in balances

“KERN offers you a complete, carefully-designed range of laboratory balances, analytical balances, moisture analysers, industrial scales and test weights. And all this at an extremely attractive price with the same high level of quality.

Browse and find products in the KERN 2018 catalogue for Balances & Test service.”

TIPS FROM THE EXPERTS

As well as our microscopes and refractometers, we can offer you an extensive range of precision balances, industrial scales, medical balances, measuring and testing technology as well as an extensive range of test services.

We will offer you reliable quality at fair prices and with the shortest delivery times. Our product specialists will give you professional advice, will work with you to find the right product and will provide comprehensive support after the purchase too. This ensures a high level of investment security and a good feeling – KERN, the nice balance manufacturer from the wilds of Southern Germany.

2 Pure competence in measuring and testing technology

“The SAUTER measuring technology range covers a large selection of force-measurement devices, measurement devices for coating thickness, material thickness, hardness measurement equipment (Shore, Leeb), calliper gauges, photometers, sound level meters and test benches.




With the SAUTER 2018 catalogue for measuring technology and test services you are perfectly equipped for all technical measuring applications.”



Albert Sauter, Managing Director SAUTER measuring equipment



Hendrik Neff, Product specialist Medical Scales

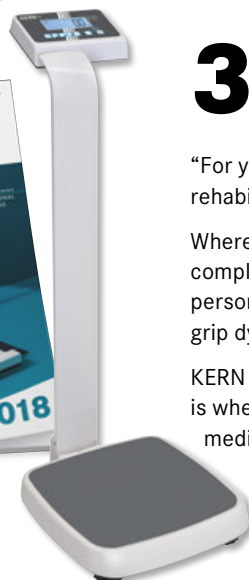


3 Medical products from KERN – products you can rely on

“For years an established name in hospitals, doctors’ surgeries, rehabilitation clinics and nursing homes.

Wherever reliable quality is important, look no further than the complete KERN range of medical scales, from baby scales, to personal scales, chair scales, obesity scales through to hand grip dynamometers.

KERN 2018 catalogue for medical balances and devices – this is where you will find everything for day-to-day tasks in the medical environment!”

5 Stereo microscope sets

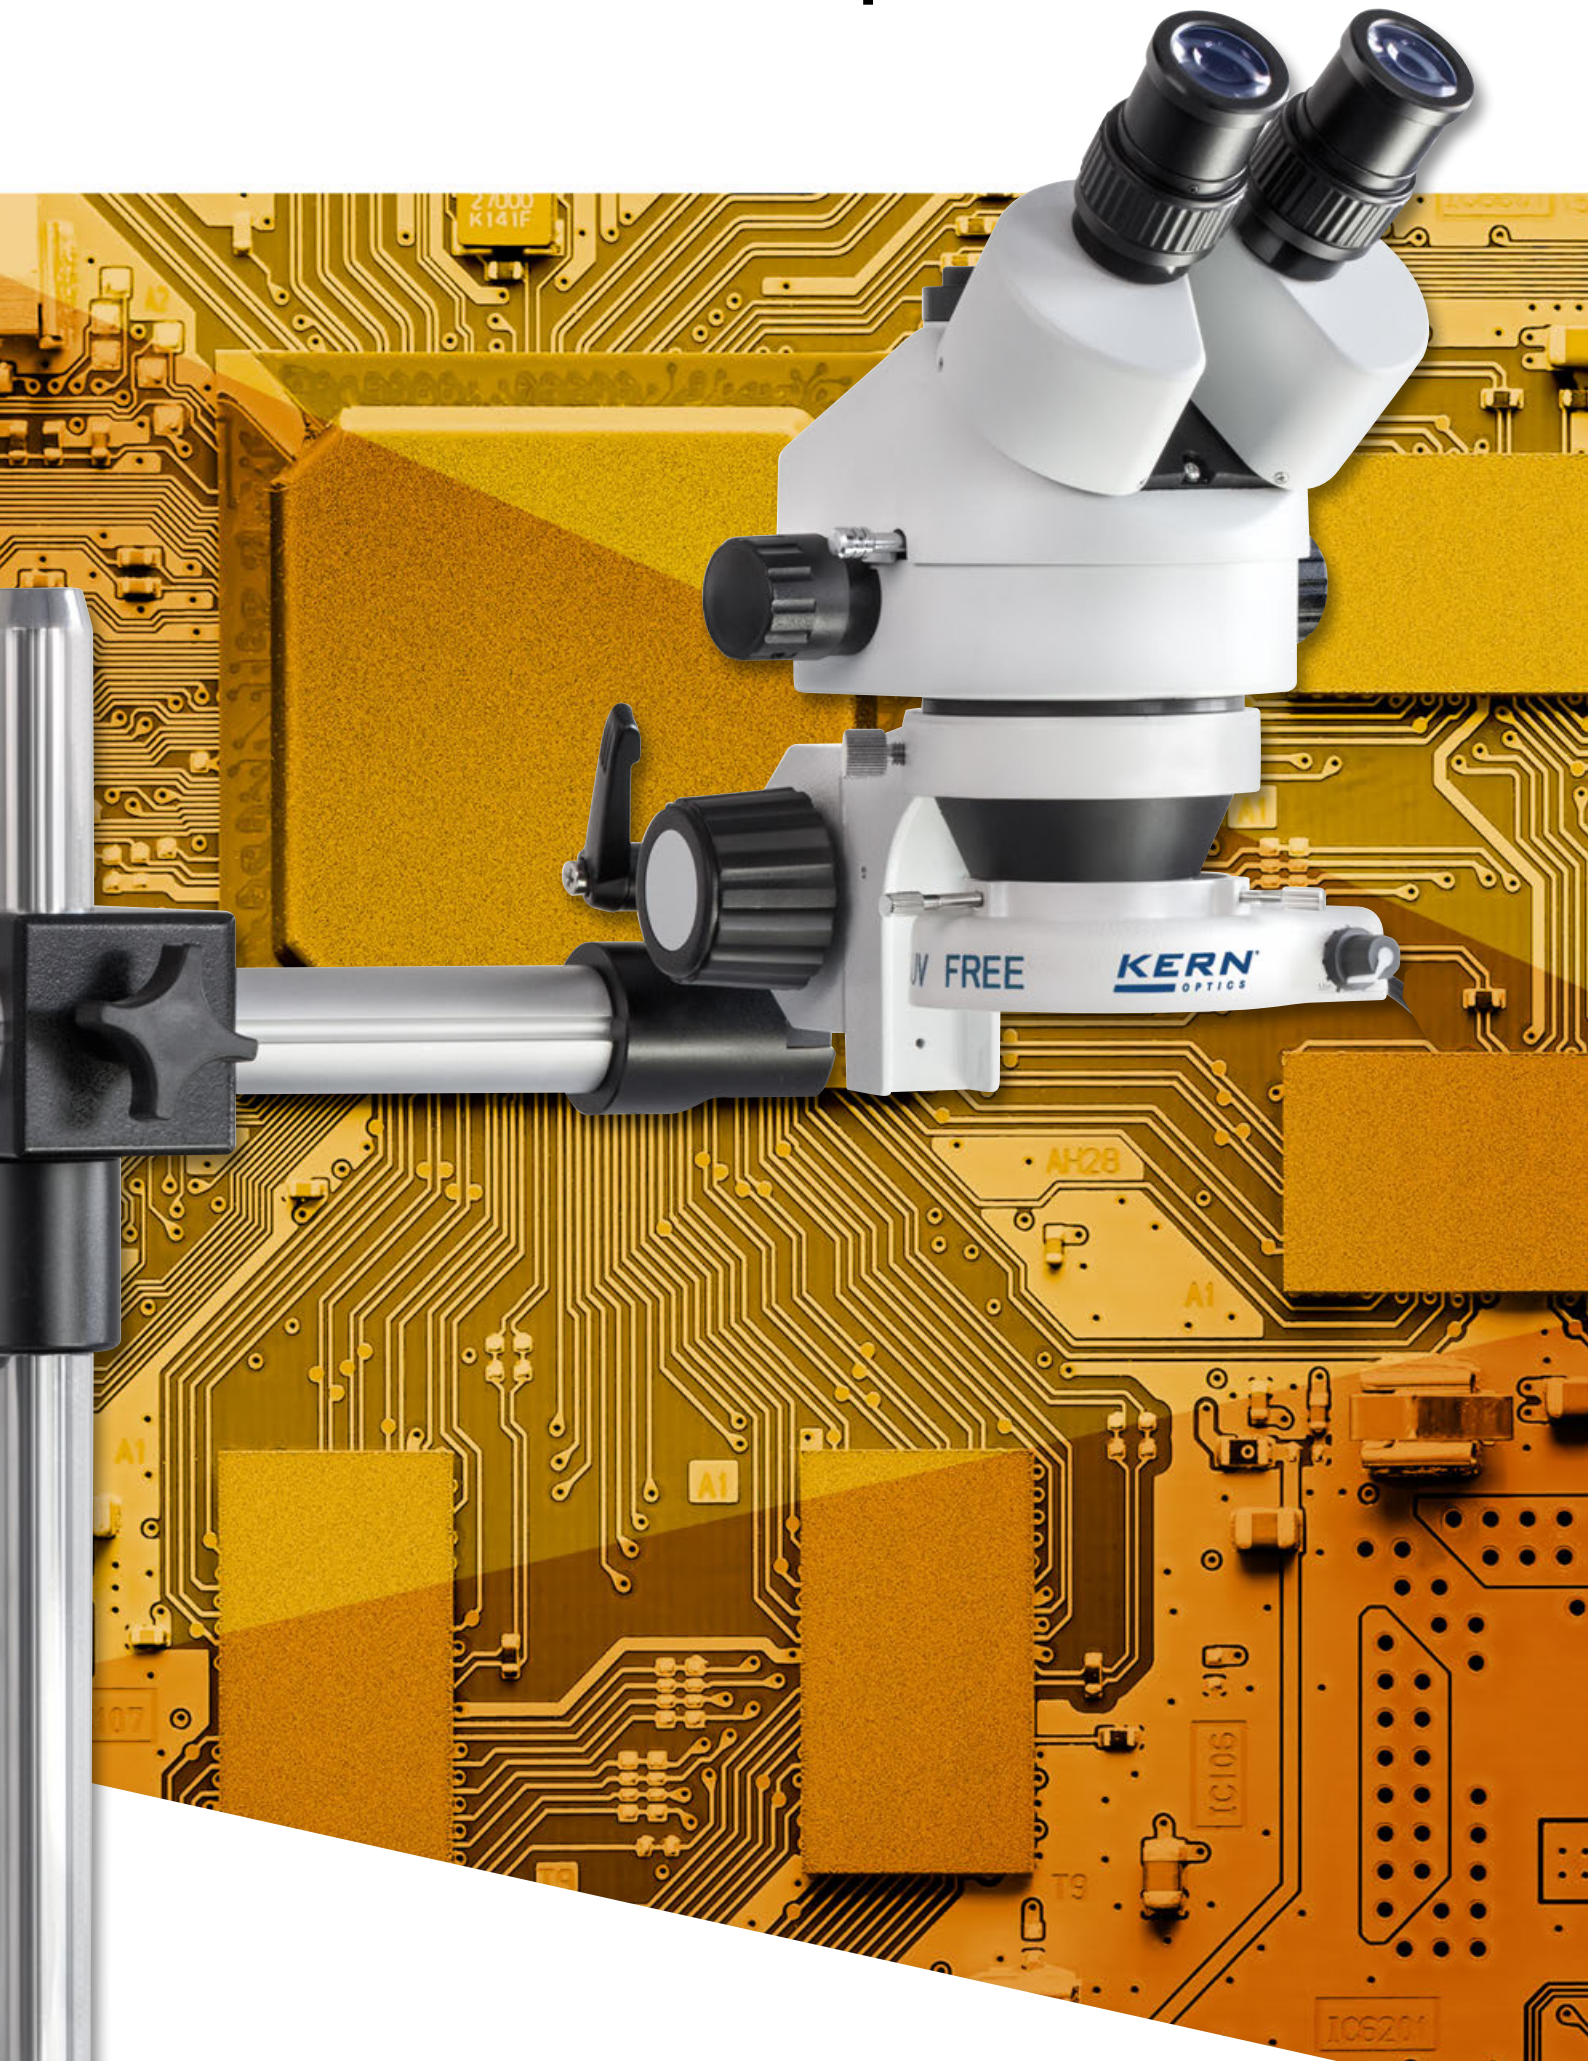



OZL 961/963



OZM 912/913



OSE 409



OZM 932/933



OZM 952/953



OZM 982/983

Predefined stereo microscope sets with universal stand and illumination for your functional workplace

Features

- Sets which have already been defined (except OSE 409), consisting of a stereo microscope head (p. 74), a universal stand (p. 79), a holder (p. 80) and a ring illumination from our range (p. 83)
- Simple – convenient – affordable
- This saves you spending time on configuration and being spoiled for choice in the combination of different components. In this way you get an expensive and highly-flexible solution for your microscope workplace

Model	Microscope head		Stand	Holder	Illumination	
	Tube	Objective Zoom				
OSE 409	Binocular (WF 10×/ø 20 mm)	1x (WD: 230 mm)	Swivel arm with block pedestal	With coarse focusing knob Adjustable torque of the hand wheels	3W LED goose neck (integrated)	↓
OZL 961	Binocular (OZL 461)	0,7× – 4,5×	Telescopic arm with plate	With coarse focusing knob Adjustable torque of the hand wheels	4,5 W LED ring light (OBB-A6 102)	↓
OZL 963	Trinocular (OZL 462)	0,7× – 4,5×	Telescopic arm with plate	With coarse focusing knob Adjustable torque of the hand wheels	4,5 W LED ring light (OBB-A6 102)	↓
OZM 912	Binocular (OZM 546)	0,7× – 4,5×	Telescopic arm with plate (OZB-A5201)	With coarse focusing knob Adjustable torque of the hand wheels (OZB-A5301)	4,5 W LED ring light (OBB-A6 102)	
OZM 913	Trinocular (OZM 547)	0,7× – 4,5×	Telescopic arm with plate (OZB-A5201)	With coarse focusing knob Adjustable torque of the hand wheels (OZB-A5301)	4,5 W LED ring light (OBB-A6 102)	
OZM 932	Binocular (OZM 546)	0,7× – 4,5×	ball-bearing double telescopic arm with plate (OZB-A5203)	With coarse focusing knob Adjustable torque of the hand wheels (OZB-A5301)	4,5 W LED ring light (OBB-A6 102)	
OZM 933	Trinocular (OZM 547)	0,7× – 4,5×	ball-bearing double telescopic arm with plate (OZB-A5203)	With coarse focusing knob Adjustable torque of the hand wheels (OZB-A5301)	4,5 W LED ring light (OBB-A6 102)	
OZM 952	Binocular (OZM 546)	0,7× – 4,5×	Jointed arm with clamp (OZB-A5212)	With coarse focusing knob Adjustable torque of the hand wheels (OZB-A5301)	4,5 W LED ring light (OBB-A6 102)	
OZM 953	Trinocular (OZM 547)	0,7× – 4,5×	Jointed arm with clamp (OZB-A5212)	With coarse focusing knob Adjustable torque of the hand wheels (OZB-A5301)	4,5 W LED ring light (OBB-A6 102)	
OZM 982	Binocular (OZM 546)	0,7× – 4,5×	Spring loaded arm with clamp (OZB-A6302)	With double handle	4,5 W LED ring light (OBB-A6 102)	
OZM 983	Trinocular (OZM 547)	0,7× – 4,5×	Spring loaded arm with clamp (OZB-A6302)	With double handle	4,5 W LED ring light (OBB-A6 102)	



6 Stereo microscope modular system

You can find sample diagrams of showing the configuration of a modular system like this on pages 76, 77 and 78 below.





Head of the microscope series OSF-5
(OSF 512, 514, 516)



Head of the microscope series OZL-46
(OZL 461, 462)



Head of the microscope series OZM-5
(OZM 546, 547)



Head of the microscope series OZP-5
(OZP 551, 552)



Head of the microscope series OZO-5
(OZO 556, 557)

Individuality, variety and flexible working through our modular construction system ► Stereo microscope heads

Features

- To enable the highest level of flexibility for your special requirements and applications, we have a large selection of stereo microscope heads, universal stands and external illumination units, which are easy to combine
- Through the different properties of the stereo microscope heads, as well as the flexibility of the universal stands and the professional fixing of our brackets, we can configure your ideal microscope to suit your needs
- There are various microscope heads available from our product range for this purpose, both as binocular or trinocular versions
- A C-mount adapter is required to connect a camera to the trinocular version. You can select this adapter from the corresponding model outfit lists on the following pages

Technical data

- Optical system: Greenough optics
- Further technical data and model features is located in the tables below on the following pages
 - OSF-5: p. 75
 - OZL-46: p. 75
 - OZM-5: p. 76
 - OZP-5: p. 77
 - OZO-5: p. 78

Model	Tube	Tube angle	Eyepieces (included)	Interpupillary distance	Objective	Magnification ratio	Diopeter adjustment	
KERN					Zoom			
OSF 512	Binocular	45°	HSWF 10×/∅ 23 mm	52–76 mm	1×/2×	–	One-sided (-6/6)	↓
OSF 514	Binocular	45°	HSWF 10×/∅ 23 mm	52–76 mm	1×/3×	–	One-sided (-6/6)	↓
OSF 516	Binocular	45°	HSWF 10×/∅ 23 mm	52–76 mm	2×/4×	–	One-sided (-6/6)	↓
OZL 461	Binocular	45°	HWF 10×/∅ 20 mm	55–75 mm	0,7× – 4,5×	6,4:1	Both-sided (-5/5)	
OZL 462	Trinocular	45°	HWF 10×/∅ 20 mm	52–76 mm	0,7× – 4,5×	6,4:1	Both-sided (-5/5)	
OZM 546	Binocular	45°	HSWF 10×/∅ 23 mm	52–76 mm	0,7× – 4,5×	6,4:1	Both-sided (-6/6)	
OZM 547	Trinocular	45°	HSWF 10×/∅ 23 mm	52–76 mm	0,7× – 4,5×	6,4:1	Both-sided (-6/6)	
OZP 551	Binocular	35°	HSWF 10×/∅ 23 mm	52–76 mm	0,6× – 5,5×	9,2:1	Both-sided (-6/6)	
OZP 552	Trinocular	35°	HSWF 10×/∅ 23 mm	52–76 mm	0,6× – 5,5×	9,2:1	Both-sided (-6/6)	
OZO 556	Binocular	35°	HSWF 10×/∅ 23 mm	52–76 mm	0,8× – 7×	8,8:1	Both-sided (-6/6)	
OZO 557	Trinocular	35°	HSWF 10×/∅ 23 mm	52–76 mm	0,8× – 7×	8,8:1	Both-sided (-6/6)	

Fittings and accessories for the heads for the OSF-5 microscope range (OSF 512, 514, 516)

Eyepiece	Specifications - Objectives				
	Magnification	1×	2×	3×	4×
HSWF 10×	Total magnification	10×	20×	30×	40×
	Field of view mm	∅ 23	∅ 11,5	∅ 7,67	∅ 5,75
SWF 15×	Total magnification	15×	30×	45×	60×
	Field of view mm	∅ 17	∅ 8,5	∅ 5,67	∅ 4,25
SWF 20×	Total magnification	20×	40×	60×	80×
	Field of view mm	∅ 14	∅ 7	∅ 4,67	∅ 3,5
SWF 30×	Total magnification	30×	60×	90×	120×
	Field of view mm	∅ 9	∅ 4,5	∅ 3	∅ 2,25
Working distance		105 mm	105 mm	105 mm	105 mm

Model outfit		Model KERN			Order number
		OSF 512	OSF 514	OSF 516	
Eyepieces (30,0 mm)	HSWF 10×/∅ 23 mm	✓✓	✓✓	✓✓	OZB-A5503
	SWF 15×/∅ 17 mm	○	○	○	OZB-A5504
	SWF 20×/∅ 14 mm	○	○	○	OZB-A5505
	SWF 30×/∅ 9 mm	○	○	○	OZB-A5506
	HSWF 10×/∅ 23 mm (reticule 0,1 mm)	○	○	○	OZB-A5512
	SWF 15×/∅ 17 mm (reticule 0,05 mm)	○	○	○	OZB-A5513
	SWF 20×/∅ 14 mm (reticule 0,05 mm)	○	○	○	OZB-A5514

✓ = Included with delivery

○ = Option

Fittings and accessories for the heads for the OZL-46 microscope range (OZL 461, OZL 462)

Eyepiece	Specifications - Objectives					
	Magnification	Standard 1,0×	Auxiliary objectives			
			0,5×	0,75×	1,5×	2,0×
HSWF 10×	Total magnification	7× - 45×	3,5× - 22,5×	5,3× - 33,8×	10,5× - 67,5×	14× - 90×
	Field of view mm	∅ 28,6 - 4,4	∅ 57,1 - 8,9	∅ 38,1 - 5,9	∅ 19 - 3	∅ 14,3 - 2,2
HWF 15×	Total magnification	10,5× - 67,5×	5,3× - 33,8×	7,9× - 50,6×	15,5× - 101,3×	21× - 135×
	Field of view mm	∅ 21,4 - 3,3	∅ 42,9 - 6,7	∅ 28,5 - 4,4	∅ 14,3 - 2,2	∅ 10,7 - 1,7
HSWF 20×	Total magnification	14× - 90×	7× - 45×	10,5× - 67,5×	21× - 135×	28× - 180×
	Field of view mm	∅ 14,3 - 2,2	∅ 28,6 - 4,4	∅ 19,1 - 2,9	∅ 9,5 - 1,5	∅ 7,1 - 1,1
HWF 25×	Total magnification	17,5× - 122,5×	8,8× - 56,3×	13,1× - 91,9×	26,3× - 168,8×	35× - 225×
	Field of view mm	∅ 12,9 - 2,0	∅ 25,7 - 4,0	∅ 17,2 - 2,7	∅ 8,6 - 1,3	∅ 6,4 - 1,0
Working distance		105 mm	177 mm	95 mm	47 mm	26 mm

Model outfit		Model KERN		Order number
		OZL 461	OZL 462	
Eyepieces (30,0 mm)	HWF 10×/∅ 20 mm	✓✓	✓✓	OZB-A4631
	HSWF 15×/∅ 15 mm	○	○	OZB-A4632
	HWF 20×/∅ 10 mm	○	○	OZB-A4633
	HSWF 25×/∅ 9 mm	○	○	OZB-A4634
Auxiliary objectives	0,5×	○	○	OZB-A4641
	0,75×	○	○	OZB-A4644
	1,5×	○	○	OZB-A4642
	2,0×	○	○	OZB-A4643
C-Mount	1× (focus adjustable)		✓	OZB-A4809
	0,3× (focus adjustable)		○	OZB-A4810
	0,5× (focus adjustable)		○	OZB-A4811

✓ = Included with delivery

○ = Option

Fittings and accessories for the heads for the OZM-5 microscope range (OZM 546, OZM 547)

Eyepiece	Specifications - Objectives						
	Magnification	Standard 1,0×	Auxiliary objectives				
			0,37×	0,5×	0,7×	1,5×	2×
HSWF 10×	Total magnification	7× - 45×	2,59× - 16,65×	3,5× - 22,5×	4,9× - 31,5×	10,5× - 67,5×	14× - 90×
	Field of view mm	∅ 32,8 - 5,1	∅ 88,8 - 13,8	∅ 65,7 - 10,2	∅ 46,9 - 7,3	∅ 21,9 - 3,4	∅ 16,4 - 2,6
SWF 15×	Total magnification	10,5× - 67,5×	3,89× - 25×	5,3× - 33,8×	7,4× - 47,2×	15,8× - 101,3×	21× - 135×
	Field of view mm	∅ 24,3 - 3,8	∅ 65,6 - 10,2	∅ 48,6 - 7,6	∅ 34,7 - 5,4	∅ 16,2 - 2,5	∅ 12,1 - 1,9
SWF 20×	Total magnification	14× - 90×	5,18× - 33,3×	7× - 45×	9,8× - 63×	21× - 135×	28× - 180×
	Field of view mm	∅ 20 - 3,1	∅ 54,1 - 8,4	∅ 40 - 6,2	∅ 28,6 - 4,4	∅ 13,3 - 2,1	∅ 10 - 1,6
SWF 30×	Total magnification	21× - 135×	7,77× - 50×	10,5× - 67,5×	14,7× - 94,5×	31,5× - 202,5×	42× - 270×
	Field of view mm	∅ 12,9 - 2	∅ 34,7 - 5,4	∅ 25,7 - 4	∅ 18,4 - 2,9	∅ 8,6 - 1,6	∅ 6,4 - 1
Working distance		110 mm	275 mm	195 mm	145 mm	50 mm	35 mm

Model outfit		Model KERN		Order number	
		OZM 546	OZM 547		
Eyepieces (30,0 mm)	HSWF 10×/∅ 23 mm	✓✓	✓✓	OZB-A5503	
	SWF 15×/∅ 17 mm	○	○	OZB-A5504	
	SWF 20×/∅ 14 mm	○	○	OZB-A5505	
	SWF 30×/∅ 9 mm	○	○	OZB-A5506	
	HSWF 10×/∅ 23 mm (reticule 0,1 mm)	○	○	OZB-A5512	
	SWF 15×/∅ 17 mm (reticule 0,05 mm)	○	○	OZB-A5513	
	SWF 20×/∅ 14 mm (reticule 0,05 mm)	○	○	OZB-A5514	
Achromatic auxiliary objectives	0,37× only in combination with a universal stand	○	○	OZB-A5611	
	0,5×	○	○	OZB-A5612	
	0,7×	○	○	OZB-A5613	
	1,5×	○	○	OZB-A5615	
	2,0×	○	○	OZB-A5616	
	Soldering protection lens	○	○	OZB-A5614	
C-Mount	0,3× (focus adjustable)		○	OZB-A5701	
	0,5× (focus adjustable)		○	OZB-A5702	
	1,0× (focus adjustable)		○	OZB-A5703	
	1,0× (with micrometer) only in combination with OZB-A5703		○	OZB-A5704	
	for SLR cameras (Nikon)		○	OZB-A5706	
	for SLR cameras (Olympus)		○	OZB-A5707	
	for SLR cameras (Canon)		○	OZB-A5708	

✓ = Included with delivery

○ = Option

Functionality of our stereo microscope modular system

Step 1:

Select a microscope head (from page 74), a universal stand (page 79), a bracket (page 80) and a ring illumination unit (page 83), in order to generate a customised model.



Sample configuration

Fittings and accessories for the heads for the OZP-5 microscope range (OZP 551, OZP 552)

Eyepiece	Specifications - Objectives						
	Magnification	Standard 1,0×	Auxiliary objectives				
			0,37×	0,5×	0,7×	1,5×	2×
HSWF 10×	Total magnification	6× - 55×	2,96× - 25,9×	3× - 27,5×	4,2× - 38,5×	9× - 82,5×	12× - 110×
	Field of view mm	∅ 38,3 - 4,2	∅ 74,3 - 8,5	∅ 76,7 - 8,4	∅ 54,8 - 6	∅ 25,6 - 2,8	∅ 19,2 - 2,1
SWF 15×	Total magnification	9× - 82,5×	4,44× - 38,9×	4,5× - 41,25×	6,3× - 57,75×	13,5× - 123,75×	18× - 165×
	Field of view mm	∅ 28,3 - 3,1	∅ 57,4 - 6,6	∅ 56,7 - 6,2	∅ 40,5 - 4,4	∅ 18,9 - 2,1	∅ 14,2 - 1,5
SWF 20×	Total magnification	12× - 110×	5,92× - 51,8×	6× - 55×	8,4× - 77×	18× - 165×	24× - 220×
	Field of view mm	∅ 23,3 - 2,5	∅ 47,3 - 5,4	∅ 46,7 - 5,1	∅ 33,3 - 3,6	∅ 15,6 - 1,7	∅ 11,7 - 1,3
SWF 30×	Total magnification	18× - 165×	8,88× - 77,7×	9× - 82,5×	12,6× - 115,5×	27× - 247,5×	36× - 330×
	Field of view mm	∅ 15 - 1,6	∅ 30,4 - 3,5	∅ 30 - 3,3	∅ 21,4 - 2,3	∅ 10 - 1,1	∅ 7,5 - 0,8
Working distance		108 mm	275 mm	195 mm	145 mm	50 mm	35 mm

Model outfit		Model KERN		Order number	
		OZP 551	OZP 552		
Eyepieces (30,0 mm)	HSWF 10×/∅ 23 mm	✓✓	✓✓	OZB-A5503	
	SWF 15×/∅ 17 mm	○	○	OZB-A5504	
	SWF 20×/∅ 14 mm	○	○	OZB-A5505	
	SWF 30×/∅ 9 mm	○	○	OZB-A5506	
	HSWF 10×/∅ 23 mm (reticule 0,1 mm)	○	○	OZB-A5512	
	SWF 15×/∅ 17 mm (reticule 0,05 mm)	○	○	OZB-A5513	
	SWF 20×/∅ 14 mm (reticule 0,05 mm)	○	○	OZB-A5514	
Achromatic auxiliary objectives	0,37× only in combination with a universal stand	○	○	OZB-A5611	
	0,5×	○	○	OZB-A5612	
	0,7×	○	○	OZB-A5613	
	1,5×	○	○	OZB-A5615	
	2,0×	○	○	OZB-A5616	
	Soldering protection lens	○	○	OZB-A5614	
C-Mount	0,3× (focus adjustable)		○	OZB-A5701	
	0,5× (focus adjustable)		○	OZB-A5702	
	1,0× (focus adjustable)		○	OZB-A5703	
	1,0× (with micrometer) only in combination with OZB-A5703		○	OZB-A5704	
	for SLR cameras (Nikon)		○	OZB-A5706	
	for SLR cameras (Olympus)		○	OZB-A5707	
	for SLR cameras (Canon)		○	OZB-A5708	

✓ = Included with delivery

○ = Option

Functionality of our stereo microscope modular system

Step 2:

Further illumination units (page 83), a suitable protective dust cover (page 80) or a multitude of other basic stands (page 81) give you the opportunity to adapt the configuration, expansion and field of application of your ideal microscope individually to suit your own requirements

Fiber illumination



Polarising ring light



Dust cover



Basic stand



Fittings and accessories for the heads for the OZO-5 microscope range (OZO 556, OZO 557)

Eyepiece	Specifications - Objectives						
	Magnification	Standard 1,0×	Auxiliary objectives				
			0,37×	0,5×	0,7×	1,5×	2×
HSWF 10×	Total magnification	8× - 70×	2,96× - 25,9×	4× - 35×	5,6× - 49×	12× - 105×	16× - 140×
	Field of view mm	∅ 28,75 - 3,3	∅ 74,3 - 8,5	∅ 57,5 - 6,6	∅ 41,1 - 4,7	∅ 19,2 - 2,2	∅ 14,4 - 1,6
SWF 15×	Total magnification	12× - 105×	4,44× - 38,9×	6× - 52,5×	8,4× - 73,5×	18× - 157,5×	24× - 210×
	Field of view mm	∅ 21,25 - 2,4	∅ 57,4 - 6,6	∅ 42,5 - 4,9	∅ 30,4 - 3,5	∅ 14,2 - 1,6	∅ 10,6 - 1,2
SWF 20×	Total magnification	16× - 140×	5,92× - 51,8×	8× - 70×	11,2× - 98×	24× - 210×	32× - 280×
	Field of view mm	∅ 17,5 - 2	∅ 47,3 - 5,4	∅ 35 - 4	∅ 25 - 2,9	∅ 11,7 - 1,3	∅ 8,75 - 1
SWF 30×	Total magnification	24× - 210×	8,88× - 77,7×	12× - 105×	16,8× - 147×	36× - 315×	48× - 420×
	Field of view mm	∅ 11,25 - 1,3	∅ 30,4 - 3,5	∅ 22,5 - 2,6	∅ 16,1 - 1,8	∅ 7,5 - 0,9	∅ 5,625 - 0,6
Working distance		108 mm	275 mm	195 mm	145 mm	50 mm	35 mm

Model outfit		Model KERN				Order number	
		OZO 551	OZO 552	OZO 553	OZO 554		
Eyepieces (30,0 mm)	HSWF 10×/∅ 23 mm	✓✓	✓✓	✓✓	✓✓	OZB-A5503	
	SWF 15×/∅ 17 mm	○○	○○	○○	○○	OZB-A5504	
	SWF 20×/∅ 14 mm	○○	○○	○○	○○	OZB-A5505	
	SWF 30×/∅ 9 mm	○○	○○	○○	○○	OZB-A5506	
	HSWF 10×/∅ 23 mm (reticule 0,1 mm)	○	○	○	○	OZB-A5512	
	SWF 15×/∅ 17 mm (reticule 0,05 mm)	○	○	○	○	OZB-A5513	
	SWF 20×/∅ 14 mm (reticule 0,05 mm)	○	○	○	○	OZB-A5514	
Achromatic auxiliary objectives	0,37× only in combination with a universal stand	○	○	○	○	OZB-A5611	
	0,5×	○	○	○	○	OZB-A5612	
	0,7×	○	○	○	○	OZB-A5613	
	1,5×	○	○	○	○	OZB-A5615	
	2,0×	○	○	○	○	OZB-A5616	
	Soldering protection lens	○	○	○	○	OZB-A5614	
C-Mount	0,3× (focus adjustable)			○	○	OZB-A5701	
	0,5× (focus adjustable)			○	○	OZB-A5702	
	1,0× (focus adjustable)			○	○	OZB-A5703	
	1,0× (with micrometer) only in combination with OZB-A5703			○	○	OZB-A5704	
	for SLR cameras (Nikon)			○	○	OZB-A5706	
	for SLR cameras (Olympus)			○	○	OZB-A5707	
	for SLR cameras (Canon)			○	○	OZB-A5708	

✓ = Included with delivery

○ = Option

Functionality of our stereo microscope modular system

Step 3:

When using a trinocular microscope configuration, select the microscope camera (from page 85) which meets your requirements. To find the appropriate C-mount adapter, which is essential to correctly connect the camera, please see the fitting lists of the selected microscope head (from page 75).





OZB-A5201/OZB-A5211



OZB-A5202/OZB-A5212



OZB-A5203/OZB-A5213



OZB-A6301



OZB-A6302

Individuality, variety and flexible working through our modular construction system ► Universal stands

Features

- With our universal stands and basic stands, as well as microscope heads and external illumination units, you can configure your microscope to your own specifications and adapt it to your application
- Thanks to the versatile, adjustable universal stands it is possible to work in the very best way in all areas with the most varied of samples
- Universal stands are available as stand base variants as well as with the option of a bench clamp. Depending on the model, you have the choice of a telescopic arm stand, a jointed arm stand or a telescopic double arm universal stand with ball bearings
- A spring loaded universal stand including bench clamp will make your daily work with your stereo microscope easier

Model	Description	
KERN		
OZB-A5201	Telescopic arm – Plate – excl. holder	
OZB-A5211	Telescopic arm – Clamp (Range: max. 62 mm) – excl. holder	
OZB-A5202 *	Jointed arm – Plate – excl. holder	
OZB-A5212	Jointed arm – Clamp (Range: max. 62 mm) – excl. holder	
OZB-A5203	Telescopic double arm with ball bearings – Plate – excl. holder	
OZB-A5213	Telescopic double arm with ball bearings – Clamp (Range: max. 62 mm) – excl. holder	
OZB-A6301	Pillar stand with "C"-shape base – excl. holder	
OZB-A6302	Spring loaded arm – Clamp (Range: max. 50 mm) – with holder	

! * ONLY WHILE STOCKS LAST



OZB-A5301



OZB-A5306

Individuality, variety and flexible working through our modular construction system ► Holders

Features

- There are two microscope head holders available for these flexible, modular systems. These brackets are suitable for all stereo microscope stands and universal stands (excluding spring loaded arm), to make focusing possible
- The first variant available is a holder with adjustable handwheel as well as adjustment of the torque for your configuration
- For professional applications you have the choice of a mount with coarse and fine focusing knob for the very best focusing operation
- Diameter of the connector for the microscope head: 76 mm
- Diameter of the connector for the stand: 25 mm

Model	Description	
KERN		
OZB-A5301	Holder with adjustable torque of the hand wheel. Suitable for all universal stands (except of spring loaded arm) and for all basic stands as possible accessories.	
OZB-A5306	Holder with coaxial coarse and fine focusing knob and adjustable torque of the hand wheel. Suitable for all universal stands (except of spring loaded arm) and for all basic stands as possible accessories.	

Stereo microscope modular system – Dust covers KERN OBB-C

Individuality, variety and flexible working through our modular construction system ► Dust covers

Features

- When working with microscopes, we offer dust covers to give greater ease of use. By using these, you can easily avoid the time-consuming cleaning work which is necessary with routine use of your microscope
- Depending on the size of your microscope set or your microscope configuration you can select between three different models
- Please find detailed information in the following model outfit list



Model	Description	Suitable for	
KERN			
OBB-A1387	Size 1: 485×440 mm	Stereo microscope heads	
OBB-A1388	Size 2: 600×600 mm	Stereo microscope heads in combination with basic stands	
OBB-A1389	Size 3: 650×750 mm	Stereo microscope sets, stereo microscope heads in combination with universal stands	

Stereo microscope modular system – Basic stands KERN OZB-S



OZB-A5121 with coarse and fine adjustment



OZB-A5123 with coarse and fine adjustment as well as incident and transmitted illumination



OZB-A5104 (Arm curved stand)



OZB-A5106 (Arm curved stand) with incident and transmitted illumination



OZB-A5107 with extra small stage



OZB-A5109 with extra small stage as well as incident and transmitted illumination



OZB-A5114 with rust protection iron stage



OZB-A5127 with coated steel stage as well as coarse and fine adjustment

A holder is included with every basic stand

Model	Stand style	Illumination	Description	Dimensions	
KERN				mm	
OZB-A5 121	Pillar style	-	With coaxial coarse and fine adjustment	283×292×271,5	
OZB-A5 123	Pillar style	3 W LED (incident + transmitted)	With coaxial coarse and fine adjustment	283×292×303,5	
OZB-A5 104	Arm curved	-	Coarse focusing knob	283×292×240	
OZB-A5 106	Arm curved	3 W LED (incident + transmitted)	Coarse focusing knob	283×292×272	
OZB-A5 107	Pillar style	-	Coarse focusing knob	170×245×271,5	
OZB-A5 109	Pillar style	3 W LED (incident + transmitted)	Coarse focusing knob	170×245×303,5	
OZB-A5 114	Pillar style	-	Coarse focusing knob	400×300×371,5	
OZB-A5 127	Pillar style	-	With coaxial coarse and fine adjustment	181×245×272	

7 External light sources for stereomicroscopes

Ring illumination and cold light sources



Professional illumination units guarantee outstanding, uniform and strong illumination

Features

- Choose your favourite external illumination here to achieve maximum flexibility and greatest possible ease of use in stereo microscopy
- These professional illumination units provide a quality of light at a high, constant intensity at all times
- Regardless of whether your choice is space-saving ring lights or cold light sources using optical fiber, our range is all you can wish for
- With the OZB-A7101 polarisation ring illumination unit, you also have an excellent component which has been specially optimised for observing shiny surfaces
- Naturally, these external illumination units also fit your standard stereo microscope
- Exception: The ring illumination units cannot be used in combination with the following ranges: OSE-1, OSF-4G, OZL-45R, OZC-5 and OZG-4

NEW



OZB-A7101



OZB-A4571



OZB-A4572



OBB-A6102

Model	Illuminance	Inner ϕ	Colour temperature	Brightness adjustable	Illumination by segments	Polarising filter	
KERN		mm	K				
OZB-A4571	3W-LED	60	7000 - 11000	✓			
OZB-A4572	3W-LED	60	6500 - 7000	✓	✓		
OBB-A6102	4,5W-LED	63	ca. 7600	✓			
OZB-A7101 NEW	4,5W-LED	62	6500 - 7000	✓		✓	

NEW New model

✓ = Included with delivery

O = Option

Fiber illumination KERN OZB-IF



OZB-A4515



OZB-A4512



OZB-A4531



OZB-A4532



OZB-A4533

Model	Description	Length	Illuminance	Colour temperature	Brightness adjustable	
KERN		mm		K		
OZB-A4515	Dual fiber unit LED	300	6W	5600 - 6300	✓	
OZB-A4512	Cold light source halogen	-	24V/150W	3150 - 3200	✓	
OZB-A4531	Single fiber	490	Usable for OZB-A4512			
OZB-A4532	Dual fiber	490				
OZB-A4533	Ring fiber	900				

✓ = Included with delivery

O = Option

8 Microscope cameras & Software



Specialists in microscopy for measurement, counting, documentation, archiving and image processing

Features

- A large selection of microscope cameras is available for your individual applications
- The universal microscope cameras can be used anywhere and can be connected to the microscope as well as to a laptop or PC using the USB cable (USB 2.0 or USB 3.0, see table)
- The power supply is through the USB cable, which means that no additional power supply is required
- Your daily work is made significantly easier with the very best synchronisation, a high frame rate as well as stable image performance together with our camera software microscope VIS KERN OXM 901 which we deliver with the product
- For details about our software please refer to the "Camera software microscope VIS KERN OXM 901" product group in the catalogue (page 89) or see on the internet
- These universal cameras can also be connected to all microscopes available on the market offering the appropriate C-mount adapter for the particular microscope

C-mount cameras – USB 2.0 KERN ODC-1



ODC 132



ODC 152



USB-cable with micrometer slide



Eyepiece adapters

Features

- These USB 2.0 cameras give particular good images in demanding applications, such as, for example, in darkfield, phase contrast and with fluorescence applications through improved light sensitivity of the sensors
- As well as the camera, the delivery includes our multi-lingual camera software Microscope VIS KERN OXM 901, a USB cable (Length: 1,8 m) and an object micrometer to calibrate the software
- Please order the appropriate C-Mount or eyepiece adapter to fit your KERN microscope

STANDARD



Model	Resolution	Interface	FPS	Sensor	Sensor size	Colour/ Monochrome	Supported operating system	
KERN								
ODC 132 *	3,1 MP	USB 2.0	5 – 30	CMOS	1/2"	colour	Win XP, Vista, 7, 8, 10	↓
ODC 152 *	5,1 MP	USB 2.0	3.5 – 30	CMOS	1/2,5"	colour	Win XP, Vista, 7, 8, 10	↓
OB-B-A14 14	1× Eyepiece adapter (∅ 23,2 mm) for cameras from the ODC-1							
OB-B-A14 16	1× Eyepiece adapter (∅ 30,0 mm) for cameras from the ODC-1							
OB-B-A14 17	1× Eyepiece adapter (∅ 23,2 + 30,0 mm) for cameras from the ODC-1							

■ *ONLY WHILE STOCKS LAST


↓ Price reduction



Features

- Through the proven CMOS technology, in connection with the USB 2.0 or USB 3.0 the images are shown quickly and clearly
- These cameras are also ideal for more demanding applications, such as, for example, darkfield, phase contrast and for fluorescence applications
- As well as the camera, the delivery includes our multi-lingual camera software Microscope VIS KERN OXM 901, a USB cable (Length: 2 m) various eyepiece adapters and an object micrometer to calibrate the software
- Please order the appropriate C-mount adapter to fit your KERN microscope now

STANDARD



Model	Resolution	Interface	FPS	Sensor	Sensor size	Colour/ Monochrome	Supported operating system	
KERN								
ODC 822	1,3 MP	USB 2.0	15 – 48	CMOS	1/3"	colour	Win XP, Vista, 7, 8, 10	↓
ODC 824	3,1 MP	USB 2.0	11,5 – 45	CMOS	1/2"	colour	Win XP, Vista, 7, 8, 10	↓
ODC 825	5,1 MP	USB 2.0	6,8 – 55	CMOS	1/2,5"	colour	Win XP, Vista, 7, 8, 10	↓
ODC 831	3,1 MP	USB 3.0	27,3 – 53,3	CMOS	1/3"	colour	Win XP, Vista, 7, 8, 10	↓
ODC 832	5,1 MP	USB 3.0	14,2 – 101,2	CMOS	1/2,5"	colour	Win XP, Vista, 7, 8, 10	↓

↓ Price reduction

C-mount camera – HDMI KERN ODC-85

08



Scope of supplies

Features

- The ODC-851 HDMI microscope camera has been specially developed for direct HDMI connection to your HDMI compatible display device. The images can also be stored directly onto the SD card delivered with the device
- As an alternative, a USB 2.0 connection is also still available to connect a laptop or PC
- Power supply is from an external 12 V power unit
- Scope of delivery: Camera, software, USB mouse, USB 2.0 cable (Length: 2 m), HDMI cable (Length: 2 m) and SD card (16 GB)
- Please order the appropriate C-mount adapter to fit your KERN microscope now

STANDARD



Model	Resolution	Interface	FPS	Sensor	Sensor size	Colour/ Monochrome	Supported operating system	
KERN								
ODC 851	2 MP	HDMI, USB 2.0, SD	30 – 60	CMOS	1/2,8"	colour	Win XP, Vista, 7, 8, 10	↓

↓



ODC-87, ODC-88




Eyepiece camera fixed into the tube

Features

- With the KERN eyepiece cameras you can convert your standard microscope to a digital microscope, by replacing one eyepiece of your non-digital microscope with an eyepiece camera and connect this to your computer via USB
- The universal eyepiece can be connected to the microscope as well as to a laptop or PC using the USB cable (2.0 or 3.0, see table)
- The power supply is through the USB cable, which means that no additional power supply is required
- Your daily work is made significantly easier with the very best synchronisation, a high frame rate as well as stable image performance together with our software
- As well as the camera, the delivery includes a simplified version of our multi-lingual camera software Microscope VIS KERN OXM 901, a USB cable (Length: 1,5 m) and an object micrometer to calibrate the software

STANDARD



Model	Resolution	Interface	FPS	Sensor	Sensor size	Colour/ Monochrome	Supported operating system	
KERN								
ODC 872	1,3 MP	USB 2.0	7,5 – 12,5	CMOS	1/3"	colour	Win XP, Vista, 7, 8, 10	↓
ODC 874	3 MP	USB 2.0	3 – 7,5	CMOS	1/2,7"	colour	Win XP, Vista, 7, 8, 10	↓
ODC 881	5 MP	USB 3.0	15 – 30	CMOS	1/2,5"	colour	Win XP, Vista, 7, 8, 10	↓

↓ Price reduction

USB microscope – USB 2.0 KERN ODC-89



ODC 894



ODC 895

The digital USB microscope for rapid testing or for hobby use

Features

- The USB hand-held microscope is designed for rapid and simple observations. Ideally suited for coins, plants, insects and skin samples for all hobby scientists, children and students
- With the USB microscope you can easily adjust the magnification to suit all conventional samples. The zoom range can be adjusted to a magnification of 10× as well as 200×
- The eight LEDs fitted in the ring shape ensure strong and effective illumination of your sample. Use the adjustment wheel on the cable to control the illumination setting
- As well as the camera, you will also find a simplified version of our multi-lingual camera software Microscope VIS KERN OXM 901 included with delivery
- There are two stands available for you to use as a column
- Cable length: 1,4 m

Stand with integrating coaxial focusing:

- Work area: 150×80 mm
- Focus range: 51 mm
- Overall dimensions: 150×80×147 mm

Stand with focus wheel:

- Work area: 150×80mm
- Focus range: 60 mm
- Overall dimensions: 150×80×135 mm

STANDARD



Model	Resolution	Interface	FPS	Sensor	Sensor size	Supported operating system	Magnification levels	Focusing stand	Illumination	
KERN										
ODC 894	2 MP	USB 2.0	15 – 30	CMOS	1/3,2"	Win XP, Vista, 7, 8, 10	10×, 200×	Coaxial	8× LED	↓
ODC 895	2 MP	USB 2.0	15 – 30	CMOS	1/3,2"	Win XP, Vista, 7, 8, 10	10×, 200×	Focus wheel	8× LED	↓

↓

NEW



Innovative hand-held microscope for mobile applications with immediate display of the image on a smartphone or tablet


Features

- The digital WLAN hand-held microscope is designed for rapid and simple surface observations. Ideally suited for coins, bank notes, stamps, circuit boards, plants, insects, gems and skin samples for industrial use, for all hobby scientists, children and students
- The KERN ODC 910 WLAN microscope has been specially developed for direct connection to your WLAN-enabled smartphone or tablet with iOS or android
- During the live transfer to your smartphone or tablet you can take photos and videos of the sample you are investigating, and these can also be stored on your device. For larger videos you can also insert a mini SD card directly into the microscope
- With the WLAN microscope you can easily adjust the magnification to suit all conventional samples. The focus can be adjusted to a magnification of 10× as well as 200×
- The six LEDs fitted in a ring shape ensure strong and effective illumination of your sample. Use the adjustment wheel on the microscope to control the illumination setting.
- You can download the app for the ODC 910 WLAN microscope from the Apple App Store or the Android Google Play Store free of charge and this app enables you to directly transfer images and videos from the microscope to your smartphone or tablet through a simple connection
- The scope of delivery includes the WLAN microscope with integrated rechargeable battery pack, a flexible column which is easy to adjust and which has a swan neck so that you can achieve the ideal height setting, as well as a mains adapter

STANDARD



Model	Resolution	Interface	FPS	Sensor	Sensor size	Supported operating system	Magnification levels	Focusing stand	Illumination	
KERN										
ODC 910	2 MP	WLAN, SD	15 – 30	CMOS	1/4"	Android, iOS	10×, 200×	Goose neck	6× LED	

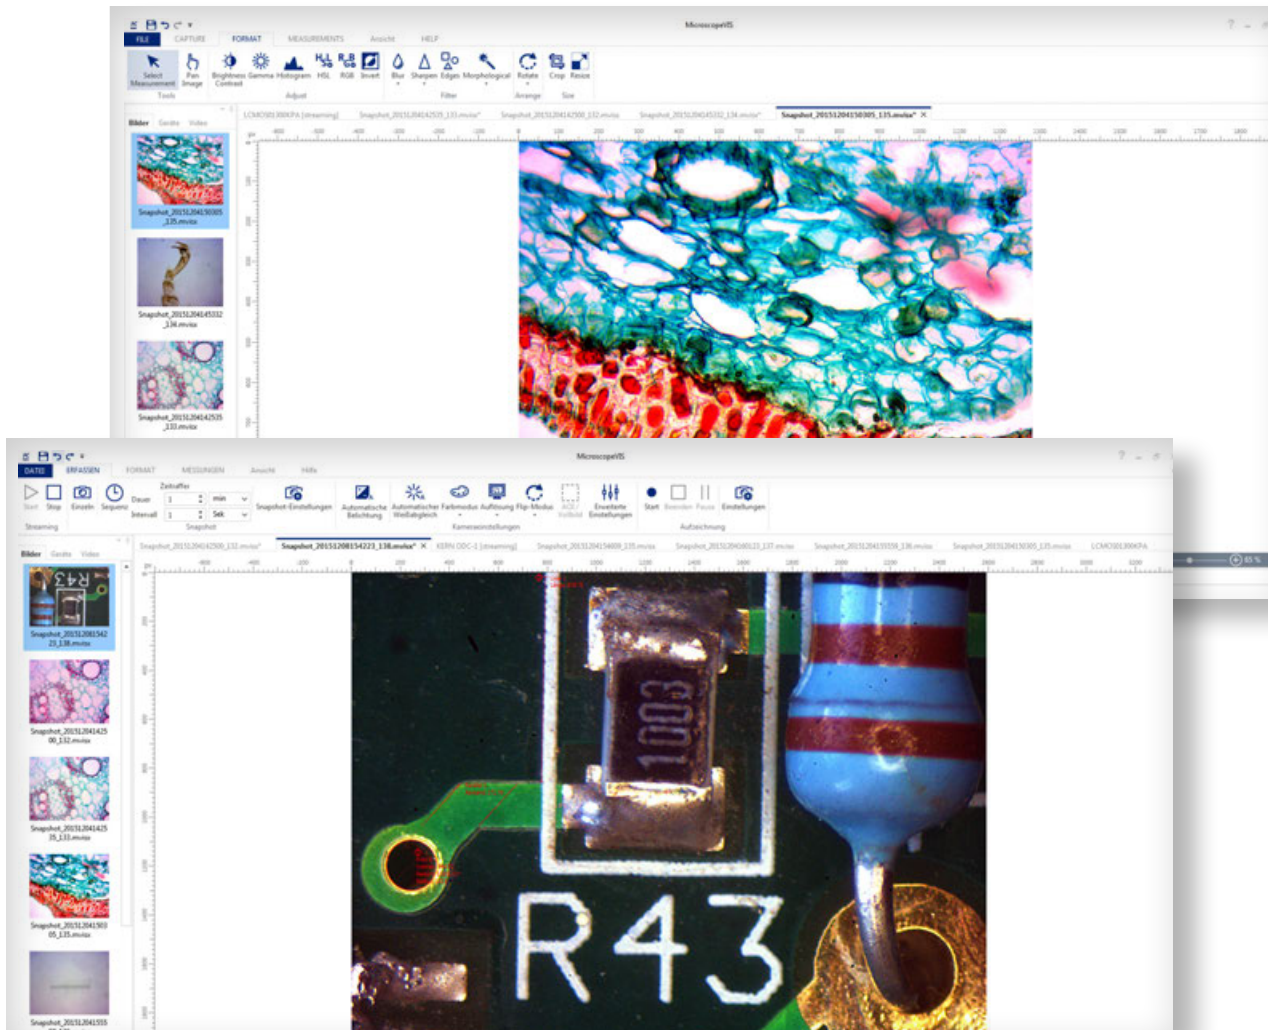

The digital specialist for measurement, counting and archiving – free of charge with all KERN microscope cameras

Features

- The camera software microscope VIS KERN OXM 901 is a multi-lingual software, which we have developed specially for all available Kern microscope cameras
- As well as the streaming function for the object to be viewed, the software also offers you an image snapshot function, as well as a video function
- Various measuring functions such as, for example, functions for measuring distance, surfaces and angles and a manual counting function are available. In addition there are extensive image processing and documentation functions available, and of course an exporting function to Microsoft Office applications Word® and Excel®
- With the display settings you can display different measurements, grid sizes, scales and rulers for the very best measuring procedure
- Automatic white balance and automatic contrast adjustment can be performed quickly and easily, which enables efficient working procedures
- As well as the software, a USB cable and an object micrometer are included with all KERN cameras as well as all digital microscopes
- Please refer to the documentation for the software in the download area on the internet.

Technical data

- Can be used for Microsoft Windows XP, Windows Vista, Windows 7, Windows 8, 8.1 and Windows 10
- Depending on the language setting of your Windows operating system the KERN VIS software will be identified and installed in the current language. This can be changed manually at any time
- The software is available in the following languages: German, English, Spanish, Italian French and Portuguese





Refractometers

9	Analogue refractometers – type: hand-held	92
10	Digital refractometers – type: hand-held	98
11	Abbe refractometers – type: desktop	103



Refractive index measurement for laboratories and the industry


Features

- The KERN ORA refractometers are universal, maintenance free analogue handheld refractometers
- The handy and robust design allows the easy, efficient and sustainable use in everyday life
- Manually calculated conversions and errors of the user are avoided by multiple selectable scales
- These scales are especially developed, exactly calculated and checked. They are also characterized by their thin and clear lines
- The optical system and the prism cover are made of special material which allows a low-tolerance measuring
- All ORA models are equipped with an eyepiece for easy and smooth setting for many different diopter strengths
- The models marked with "ATC" have an automatic temperature compensation which enables accurate measurement at different ambient temperatures (10 °C/30 °C)
- The following accessory-parts are included:
 - Storage box
 - Calibration liquid
 - Calibration block (if required)
 - Pipette
 - Small screwdriver
 - Cleaning tissue
- Further accessories are available optionally

Technical data

- Die-cast housing of copper-aluminium alloy, chrome coated
- Measurement temperature without ATC: 20 °C
- Measurement temperature range with ATC: 10 °C/30 °C
- Dimensions of the box: 205×75×55 mm (depending on the model)
- Product length: approx. 130 – 200 mm (depending on the model)
- Net weight approx. 135 – 600 g (depending on the model)

09



Scope of application: Sugar

The following models are particularly suitable for the measurement of the “BRIX” value. They are used to determine the sugar content in food, especially in fruit, vegetables, juice and soft drinks. In the same ideal way these refractometers serve for monitoring processes in the industry (coolant monitoring, oils, lubricants and fats).

The main scope of applications is:

- Industry: Monitoring of lubricants for process and quality control
- Food industry: Beverages, fruits and sweets
- Agriculture: Determination of the degree of ripeness of fruits for quality control in harvesting
- Restaurants and large-scale catering establishment



Model	Scales	Measuring range	Division	ATC	
KERN					
ORA 10BB	Brix	0 - 10 %	0,1 %		
ORA 10BA	Brix	0 - 10 %	0,1 %	✓	
ORA 18BB	Brix	0 - 18 %	0,1 %		
ORA 20BB	Brix	0 - 20 %	0,1 %		
ORA 20BA	Brix	0 - 20 %	0,1 %	✓	
ORA 32BB	Brix	0 - 32 %	0,2 %		
ORA 32BA	Brix	0 - 32 %	0,2 %	✓	
ORA 62BB	Brix	28 - 62 %	0,2 %		
ORA 62BA	Brix	28 - 62 %	0,2 %	✓	
ORA 82BB	Brix	45 - 82 %	0,5 %		
ORA 80BB	Brix	0 - 80 %	0,5 %		

Scope of application: Honey

The following models are particularly suitable for the measurement of the “BRIX” value, as well as the water content in honey and “degrees Baumé” to determine the relative density of liquids.

The main scope of applications is:

- Beekeeping
- Honey production



Model	Scales	Measuring range	Division	ATC	
KERN					
ORA 3HB	Brix Baumé Water content	58 - 92 % 38 - 43 °Bé 12 - 27 %	0,5 % 0,5 °Bé 1 %		
ORA 3HA	Brix Baumé Water content	58 - 92 % 38 - 43 °Bé 12 - 27 %	0,5 % 0,5 °Bé 1 %	✓	
ORA 6HB	Water content	12 - 30 %	0,1 %		
ORA 6HA	Water content	12 - 30 %	0,1 %	✓	

Scope of application: Salt

The following models are particularly suitable for the measurement and concentration control of the mass fraction of sodium chloride in water as well as of the content of NaCl (salt) in water. This is often used in the preparation and the cooking of sauces, bases for pastries, the production of brines (e.g. for white cheese) and the preparation of seafood and marinades for meat.

The main scope of applications is:

- Food industry
- Restaurants and large-scale catering establishment
- Aquaristic: Fishkeepers/Fishfarmers in sea and sweetwater



Model	Scales	Measuring range	Division	ATC	
KERN					
ORA 1SB	Salinity specific gravity	0 – 100 ‰ 1,000 – 1,070 sg	1 ‰ 0,001 sg		
ORA 1SA	Salinity specific gravity	0 – 100 ‰ 1,000 – 1,070 sg	1 ‰ 0,001 sg	✓	
ORA 2SB	Salt (NaCl)	0 – 28 %	0,2 %		
ORA 2SA	Salt (NaCl)	0 – 28 %	0,2 %	✓	
ORA 3SB	Salt (NaCl) Brix	0 – 28 % 0 – 32 %	0,2 % 0,2 %		
ORA 3SA	Salt (NaCl) Brix	0 – 28 % 0 – 32 %	0,2 % 0,2 %	✓	

Scope of application: Wine

The following models are particularly suitable for the measurement of the content of sugar in fruits. It indicates the expected °Alcohol of the fruit. The degree of ripeness of fruit (fruit-sugar) can also be determined, such as e.g. grapes.

The main scope of applications is:

- Agriculture: Wine-growing and fruit-growing
- Wine-production
- Must and alcohol production



°Oe = Degree Oechsle, °KMW = Klosterneuburger Must balance

Model	Scales	Measuring range	Division	ATC	
KERN					
ORA 1WB	Oechsle KMW (Babo) Brix	0 – 140 °Oe 0 – 25 °KMW 0 – 32 %	1 °Oe 0,25 °KMW 0,2 %		
ORA 1WA	Oechsle KMW (Babo) Brix	0 – 140 °Oe 0 – 25 °KMW 0 – 32 %	1 °Oe 0,25 °KMW 0,2 %	✓	
ORA 3WB	Oechsle Brix	30 – 140 °Oe 0 – 32 %	1 °Oe 0,2 %		
ORA 3WA	Oechsle Brix	30 – 140 °Oe 0 – 32 %	1 °Oe 0,2 %	✓	
ORA 7WB	Oechsle KMW (Babo) Brix	30 – 140 °Oe 0 – 25 °KMW 0 – 32 %	1 °Oe 0,2 °KMW 0,2 %		
ORA 7WA	Oechsle KMW (Babo) Brix	30 – 140 °Oe 0 – 25 °KMW 0 – 32 %	1 °Oe 0,2 °KMW 0,2 %	✓	
ORA 1AB <small>NEW</small>	Percentage by volume Percentage by volume	0 – 50 % (v/v) 50 – 80 % (v/v)	1 % (v/v) 2,5 % (v/v)		
ORA 2AB	Percentage by mass Percentage by mass	0 – 50 % (w/w) 50 – 80 % (w/w)	1 % (w/w) 2,5 % (w/w)		

Scope of application: Urine

The following models are particularly suitable for the measurement of the specific gravity (sg) in urine, the quantity of serum (serumproteine) in urine (doping control among athletes), and the refractive index.

The main scope of applications is:

- Hospitals
- Doctor's surgeries/Physicians
- Medical training institutions
- Nursing homes
- Sports medicine (doping test)
- Veterinary



Model	Scales	Measuring range	Division	ATC	
KERN					
ORA 2PB	Serum protein Urine (spec. gravity) Refractive index	0 - 12 g/dl 1,000 - 1,050 sgU 1,3330 - 1,3600 nD	0,2 g/dl 0,002 sgU 0,0005 nD		
ORA 2PA	Serum protein Urine (spec. gravity) Refractive index	0 - 12 g/dl 1,000 - 1,050 sgU 1,3330 - 1,3600 nD	0,2 g/dl 0,002 sgU 0,0005 nD	✓	
ORA 5PB	Serum protein Urine (s. g. dog) Urine (s. g. cat)	2 - 14 g/dl 1,000 - 1,060 sgU 1,000 - 1,060 sgU	0,1 g/dl 0,001 sgU 0,001 sgU		

Scope of application: Industry/Automotive

The following models are particularly suitable for the measurement and determination of AdBlue, glycol concentration (ethylene (EG) and propylene (PG)), battery fluid (BF), urea, the freezing point of fountain solution (CW). Furthermore these models are suitable for the measurement of thermal exchange systems.

The main scope of applications is:

- Automotive industry: Car-workshops and producers
- Chemical industry
- Solar industry: Antifreeze monitoring
- Geothermal industry: Brine-concentration-measurement for ground heat
- Forestry/Lumbermen




Model	Scales	Measuring range	Division	ATC	
KERN					
ORA 4FB	EG (G11/12) PG (G13) CW BF	-50 - 0 °C -50 - 0 °C -40 - 0 °C 1,10 - 1,40 kg/l	1 °C 1 °C 5 °C 0,01 kg/l		
ORA 4FA	EG (G11/12) PG (G13) CW BF	-50 - 0 °C -50 - 0 °C -40 - 0 °C 1,10 - 1,40 kg/l	1 °C 1 °C 5 °C 0,01 kg/l	✓	
ORA 1UB	Urea	0 - 40 %	0,2 %		
ORA 1UA	Urea	0 - 40 %	0,2 %	✓	
ORA 4UB	Urea EG (G11/12) PG (G13) CW BF	30 - 35 % -50 - 0 °C -50 - 0 °C -40 - 0 °C 1,10 - 1,40 kg/l	0,2 % 1 °C 1 °C 5 °C 0,01 kg/l		
ORA 4UA	Urea EG (G11/12) PG (G13) CW BF	30 - 35 % -50 - 0 °C -50 - 0 °C -40 - 0 °C 1,10 - 1,40 kg/l	0,2 % 1 °C 1 °C 5 °C 0,01 kg/l	✓	

Scope of application: Expert applications

The following models have a special large measuring range for the refractive index and large divided scales for the measurement and clear reading of Brix values.

The main scope of applications is:

- Universal application, especially when extra large measuring ranges are required

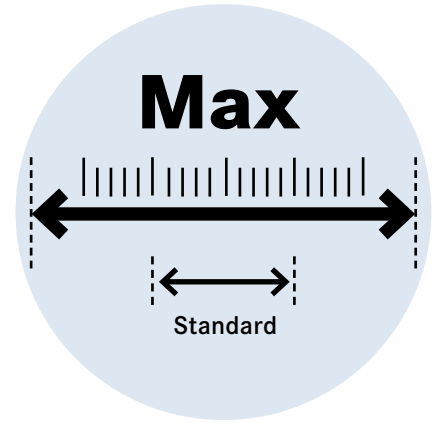

Model	Scales	Measuring range	Division	ATC	
KERN					
ORA 80BE	Brix	0 – 50 % 50 – 80 %	0,5 % 0,5 %		
ORA 90BE	Brix	0 – 42 % 42 – 71 % 71 – 90 %	0,2 % 0,2 % 0,2 %		
ORA 1RE	Refractive index	1,333 – 1,405 nD 1,405 – 1,468 nD 1,468 – 1,517 nD	0,005 nD 0,005 nD 0,005 nD		
ORA 4RR	Refractive index	1,440 – 1,520 nD	0,001 nD		




Scope of application: Gemmology/Jewellery

The Gem models have a special refracting-index range for jewellery. For this refractometer there is a nice leather bag in the scope of delivery included.

The main scope of applications is:

- Jewellers
- Training/Education
- Jewellery industry

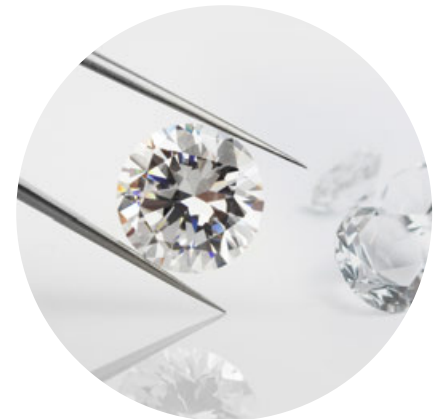

Model	Scales	Measuring range	Division	ATC	
KERN					
ORA 1GG	Refractive index	1,30 – 1,81 nD	0,01 nD		



Accessory parts: Analogue refractometer – ORA



Prism coverplate with LED
ORA-A1101



Calibration liquid/
Contact liquid



Leather bag
ORA-A2103



Calibration block

Model	Description	
KERN		
ORA-A1101	Prism coverplate with integrated LED illumination	
ORA-A2103	Leather bag for analog refractometers	
ORA-A1001	Calibration liquid – distilled water Volume: 2,5 ml	
ORA-A1002	Contact liquid – Clove oil (for Calibration value 19,6%) Volume: 2,5 ml	
ORA-A1003	Calibration liquid – saturated salt solution Volume: 2,5 ml	
ORA-A1004	Contact liquid – Clove oil (for Calibration value 78,8%) Volume: 2,5 ml	
ORA-A1005	Calibration block for models ORA 82BB, ORA 3HA, ORA 3HB, ORA 6HA, ORA 6HB , ORA 4RR	
ORA-A1007	Contact liquid – Diiodomethane “Standard” (Refractive index: 1,74 nD) Volume: 2,5 ml	
ORA-A3001	Contact liquid – Diiodomethane “Pro” (Refractive index: 1,79 nD) Volume: 2 ml	↓
ORA-A1008	Calibration block for model ORA 1GG	↓
ORA-A2001	Prism coverplate (spare part)	

↓ Price reduction

Relationship overview – refractometer calibration (analogue)

Model refractometer	Calibration value	Calibration liquid	Article number liquid	Calibration block	Article number calibration block
ORA 10BA; ORA 10BB; ORA 18BB; ORA 1WA; ORA 1WB; ORA 20BA; ORA 20BB; ORA 32BA; ORA 32BB; ORA 3SA; ORA 3SB; ORA 3WA; ORA 3WB; ORA 7WA; ORA 7WB; ORA 80BB; ORA 80BE	0 % Brix	distilled water	ORA-A1001	-	-
ORA 1UA; ORA 1UB	0 % Urea	distilled water	ORA-A1001	-	-
ORA 4FA; ORA 4FB; ORA 4UA; ORA 4UB	0 °C EG/PG/CW	distilled water		-	
ORA 1SA; ORA 1SB	0 ‰ Salinity	distilled water		-	
ORA 2SA; ORA 2SB	0 % Salt (NaCl)	distilled water		-	
ORA 2AB	0 % Vol (weight)	distilled water		-	
ORA 2PA; ORA 2PB; ORA 5PB	1,000 sg Urine	distilled water		-	
ORA 62BA; ORA 62BB	29,6 % Brix	saturated salt solution	ORA-A1003	-	-
ORA 3HA; ORA 3HB; ORA 82BB	78,8 % Brix	Clove oil CAS 8000-34-8	ORA-A1004	yes	ORA-A1005
ORA 4RR	1,4875 nD	Clove oil CAS 8000-34-8	ORA-A1004	yes	ORA-A1005
ORA 6HA; ORA 6HB	19,6 % Water content	Clove oil CAS 8000-34-8	ORA-A1002	yes	ORA-A1005
ORA 1GG	1,515 nD	Diiodomethane CAS 90-11-9	ORA-A1007	yes	ORA-A1008

NEW



Transport and storage case



Rear view

Digital refractive index measurement for laboratories and the industry for multi-application

Features

- The KERN ORF refractometers are accurate and universal maintenance free digital handheld refractometers
- The large display is easy to read. Mistakes in reading are avoided
- The typical and practical design is suitable for a quick and convenient everyday use and is characterized by its easy-using and robustness
- The KERN ORF range is protected to international IP65 protection class, against dust and water splashes. After use, you can rinse the refractometer under running water
- The large, easy-to-read TFT colour display with integrated temperature display supports the user to reliably determine the measurement
- A large selection of models is available with single or multiple scales. This allows the use in various applications
- The instrument comes with an optimized software that can show a result in different scales
- The integrated automatic temperature compensation (ATC), avoids the manual conversion of the measurement. This allows a quick and efficient usage of the instrument
- Due to the fact that the refractometer has been calibrated at the factory, this guarantees that it can be used immediately for accurately measuring your sample.
- The following accessory-parts are included:
 - Calibration liquid
 - Pipette
 - Storage box
 - 2 × AAA batteries
 - Leather bag
 - Small screwdriver
 - Cleaning tissue

Technical data

- Measurement temperature: 5 °C – 40 °C
- Overall dimensions W×D×H 133×65×38 mm
- Net weight approx. 200 g
- Power supply: 2 × AAA (1,5 V)
- Lifetime of the battery: approx. 3.750 measurements
- ATC (Automatic Temperature Compensation)
- Minimum sample volume: 2–3 drops
- Automatic energy management (AUTO-OFF after 90 seconds)

STANDARD



Scope of application: Sugar

The following models are particularly suitable for the measurement of the “BRIX” value. They are used to determine the sugar content in food, especially in fruit, vegetables, juice and sweet or soft drinks. In the same ideal way, these refractometers serve in monitoring processes in the industry (coolant monitoring, oils, lubricants and fats). Alternatively, the display can be switched to show the refractive index.

The main scope of applications is:

- Industry: Monitoring of lubricants in machines and quality control
- Food industry: Beverages, fruits and sweets
- Agriculture: Determination of the degree of ripeness of fruit for quality control in harvesting
- Restaurants and large-scale catering establishment



Model	Scales	Measuring range	Accuracy	Division	
KERN					
ORF 45BM	Brix Refractive index	0 - 45 % 1,3330 - 1,4098 nD	± 0,2 % ± 0,0003 nD	0,1 % 0,0001 nD	
ORF 92BM	Brix Refractive index	58 - 92 % 1,4370 - 1,5233 nD	± 0,2 % ± 0,0003 nD	0,1 % 0,0001 nD	
ORF 85BM	Brix Refractive index	0 - 85 % 1,3330 - 1,5100 nD	± 0,2 % ± 0,0003 nD	0,1 % 0,0001 nD	

Scope of application: Honey

The following models are particularly suitable for the measurement of the “BRIX” value, the water content in honey according to the International Honey Commission (IHC2002) and “degrees Baumé” to determine the relative density of liquids. Alternatively the display can be switched to show the refractive index.

The main scope of applications is:

- Beekeeping
- Honey production



Model	Scales	Measuring range	Accuracy	Division	
KERN					
ORF 92HM	Brix Baumé Water content Refractive index	58 - 92 % 38 - 43 °Bé 13 - 25 % 1,4370 - 1,5233 nD	± 0,2 % ± 0,2 °Bé ± 0,2 % ± 0,0003 nD	0,1 % 0,1 °Bé 0,1 % 0,0001 nD	

Scope of application: Salt

The following models are particularly suitable to determine the concentration of NaCl (salt) in water. This is often used for the preparation and for the cooking of sauces, bases for pastries, the production of brines (e.g. for white cheese) and the preparation of seafood and marinades for meat. Alternatively the display can be switched to show the refractive index.

The main scope of applications is:

- Food industry
- Restaurants, and large-scale catering establishment, canteens



Model	Scales	Measuring range	Accuracy	Division	
KERN					
ORF 3SM	Brix Salt (NaCl) Refractive index	0 - 45 % 0 - 28 % 1,3330 - 1,4100 nD	± 0,2 % ± 0,2 % ± 0,0003 nD	0,1 % 0,1 % 0,0001 nD	

Scope of application: Wine

The following models are particularly suitable for the measurement of the sugar content in fruit. It indicates the expected °Alcohol of the fruit. The degree of ripeness of fruit (fruit-sugar) can also be determined, such as e.g. grapes.

The main scope of applications is:

- Agriculture: Wine-growing (viticulture) and fruit-growing
- Wine-production
- Must and alcohol production



°Oe = Degree Oechsle, °KMW = Klosterneuburger Most Waage

Model	Scales	Measuring range	Accuracy	Division	
KERN					
ORF 2WM	Mass SW Vol. AP Oechsle KMW (Babo)	0 - 35 % 0 - 22 % 0 - 150 °Oe 0 - 25 °KMW	± 0,2 % ± 0,2 % ± 1 °Oe ± 0,2 °KMW	0,1 % 0,1 % 1 °Oe 0,1 °KMW	

Scope of application: Urine

The following models are particularly suitable for the measurement of the specific gravity (sg) in urine, the quantity of serum (serumproteine) in urine (doping control among athletes), and the refractive index.

The main scope of applications is:

- Hospitals
- Doctor's surgeries/Physicians
- Medical training institutions
- Nursing homes
- Sports medicine (doping test)



Model	Scales	Measuring range	Accuracy	Division	
KERN					
ORF 1PM	Serum protein Urine (spec. gravity) Refractive index	0 - 12 g/dl 1,000 - 1,050 sgU 1,3330 - 1,3900 nD	± 0,1 g/dl ± 0,001 sgU ± 0,0003 nD	0,1 g/dl 0,001 sgU 0,001 nD	

Scope of application: Industry/Automotive

The following models are particularly suitable for the measurement and determination of AdBlue, glycol concentration (ethylene (EG) and propylene (PG)), battery fluid (BF), urea, the freezing point of fountain solution (CW). Furthermore these models are suitable for the measurement of thermal exchange systems.

The main scope of applications is:

- Automotive industry: Car-workshops and producers
- Chemical industry
- Solar industry: Antifreeze monitoring
- Geothermal industry: Brine-concentration-measurement for ground heat
- Forestry/Lumbermen



Model	Scales	Measuring range	Accuracy	Division	
KERN					
ORF 2UM	EG PG BF CW	-50 - 0 °C -50 - 0 °C 1,00 - 1,50 kg/l -40 - 0 °C	± 0,5 °C ± 0,5 °C ± 0,01 kg/l ± 0,5 °C	0,1 °C 0,1 °C 0,01 kg/l 0,1 °C	
ORF 5UM	EG PG Urea CW	-50 - 0 °C -50 - 0 °C 0 - 40 % -40 - 0 °C	± 0,5 °C ± 0,5 °C ± 0,2 % ± 0,5 °C	0,1 °C 0,1 °C 0,1 % 0,1 °C	
ORF 6US <small>NEW</small>	Urea Refractive index	0 - 40 % 1,3330 - 1,4100 nD	± 0,2 % ± 0,0003 nD	0,1 % 0,0001 nD	


NEW New model

Scope of application: Expert applications

The following model has a special large measuring range for the refractive index.

The main scope of applications is:

- Universal measuring instrument, especially for applications with extra large measuring ranges

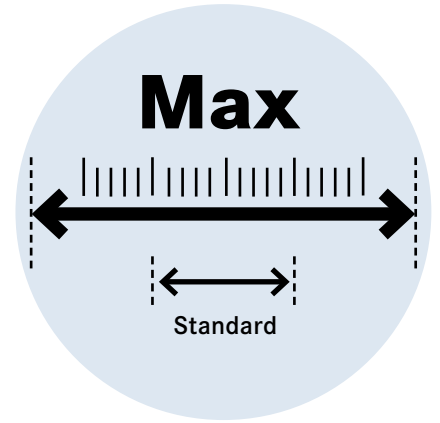

Model	Scales	Measuring range	Accuracy	Division	
KERN					
ORF 1RS	Refractive index	1,3330 - 1,5400 nD	± 0,0005 nD	0,0001 nD	

Accessory parts: Digital refractometer – ORF

Model	Description	
KERN		
ORF-A1005	Prism cover for digital refractometers	
ORA-A1001	Calibration liquid – distilled water Volume: 2,5 ml	
ORA-A1006	Calibration liquid – Triethyl citrate Volume: 2,5 ml	
ORD-A2104	Leather bag for digital refractometer (Spare part)	↓

↓ Price reduction



Calibration liquid/
Contact liquid

Relationship overview – refractometer calibration (digital)					
Model refractometer	Calibration value	Calibration liquid	Article number liquid	Calibration block	Article number calibration block
ORF 45BM; ORF 85BM; ORF 3SM	0 % Brix	distilled water	ORA-A1001	-	-
ORF 2WM	0 °KMW	distilled water	ORA-A1001	-	-
ORF 1PM; ORF 1RS	1,3330 nD	distilled water	ORA-A1001	-	-
ORF 2UM; ORF 5UM	0 °C EG/PG/CW	distilled water	ORA-A1001	-	-
ORF 6US	0 % Urea	distilled water	ORA-A1001	-	-
ORF 92BM; ORF 92HM	60 % Brix	Triethyl citrate CAS 77-93-0	ORA-A1006	-	-



Refractive index measurement for pharmacy, laboratories and industry

Features

- The KERN ORT refractometers are universal analog Abbe refractometers
- The handy and robust design allows the easy, efficient and sustainable use in everyday life
- The integrated scale allows the use in different applications and provides the best possible security to read the measurement results accurately
- The scope of delivery includes:
 - Calibration solution
 - Calibration block
 - Pipette
 - Small screwdriver
 - Cleaning tissue
 - Digital thermometer
- Accessories are available as options

Technical data

- Measurement temperature: 20 °C
- Overall dimensions W×D×H
180×90×240 mm
- Net weight approx. 1950 g

STANDARD



Scope of application: Industry/Pharmacy/Laboratory


The following model is a simple yet highly reliable Abbe refractometer with a digital thermometer. Liquid, solid and pasty samples can be evaluated. This refractometer is robust, accurate and easy to use. Optionally a solide aluminium case for transport and storage is available. It measures the refractive index (nD).

The main scope of applications is:

- Sugar industry: for example cane sugar
- Pharmacy
- Beverage industry
- Food industry
- Chemical industry
- Oil industry/Refinery
- Laboratories
- Training

Model	Scales	Measuring range	Accuracy	Division	
KERN					
ORT 1RS	Brix Refractive index	0 – 95 % 1,3000 – 1,7000 nD	± 0,1 % ± 0,0002 nD	0,25 % 0,0005 nD	↓

↓ Price reduction

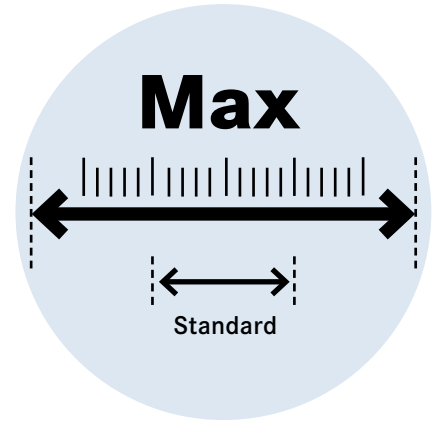

ORT 1RS

Accessory parts: Abbe refractometer – ORT

Model	Description	
KERN		
ORA-A1102	Aluminium suitcase Dimension: 310×120×240 mm, weight: 1300 g	↓
ORA-A2266	Digital thermometer (0 °C/50 °C) (Spare part)	
ORA-A2267	Calibration block for ORT 1RS	
ORA-A1107	Contact liquid – Alpha-Bromonaphthalene (Refractive index: 1,65 nD) Volume: 2,5 ml	
ORA-A3001	Contact liquid – Diiodomethane “Pro” (Refractive index: 1,79 nD) Volume: 2 ml	↓

↓ Price reduction




Transport and storage case
ORA-A1102



Calibration block
ORA-A2267

Relationship overview – refractometer calibration (Abbe)

Model refractometer	Calibration value	Calibration liquid	Article number liquid	Calibration block	Article number calibration block
ORT 1RS	engraved on the block (nD value)	Alpha-Bromnaphthalene CAS 90-11-9	ORA-A1107	yes	ORA-A2267

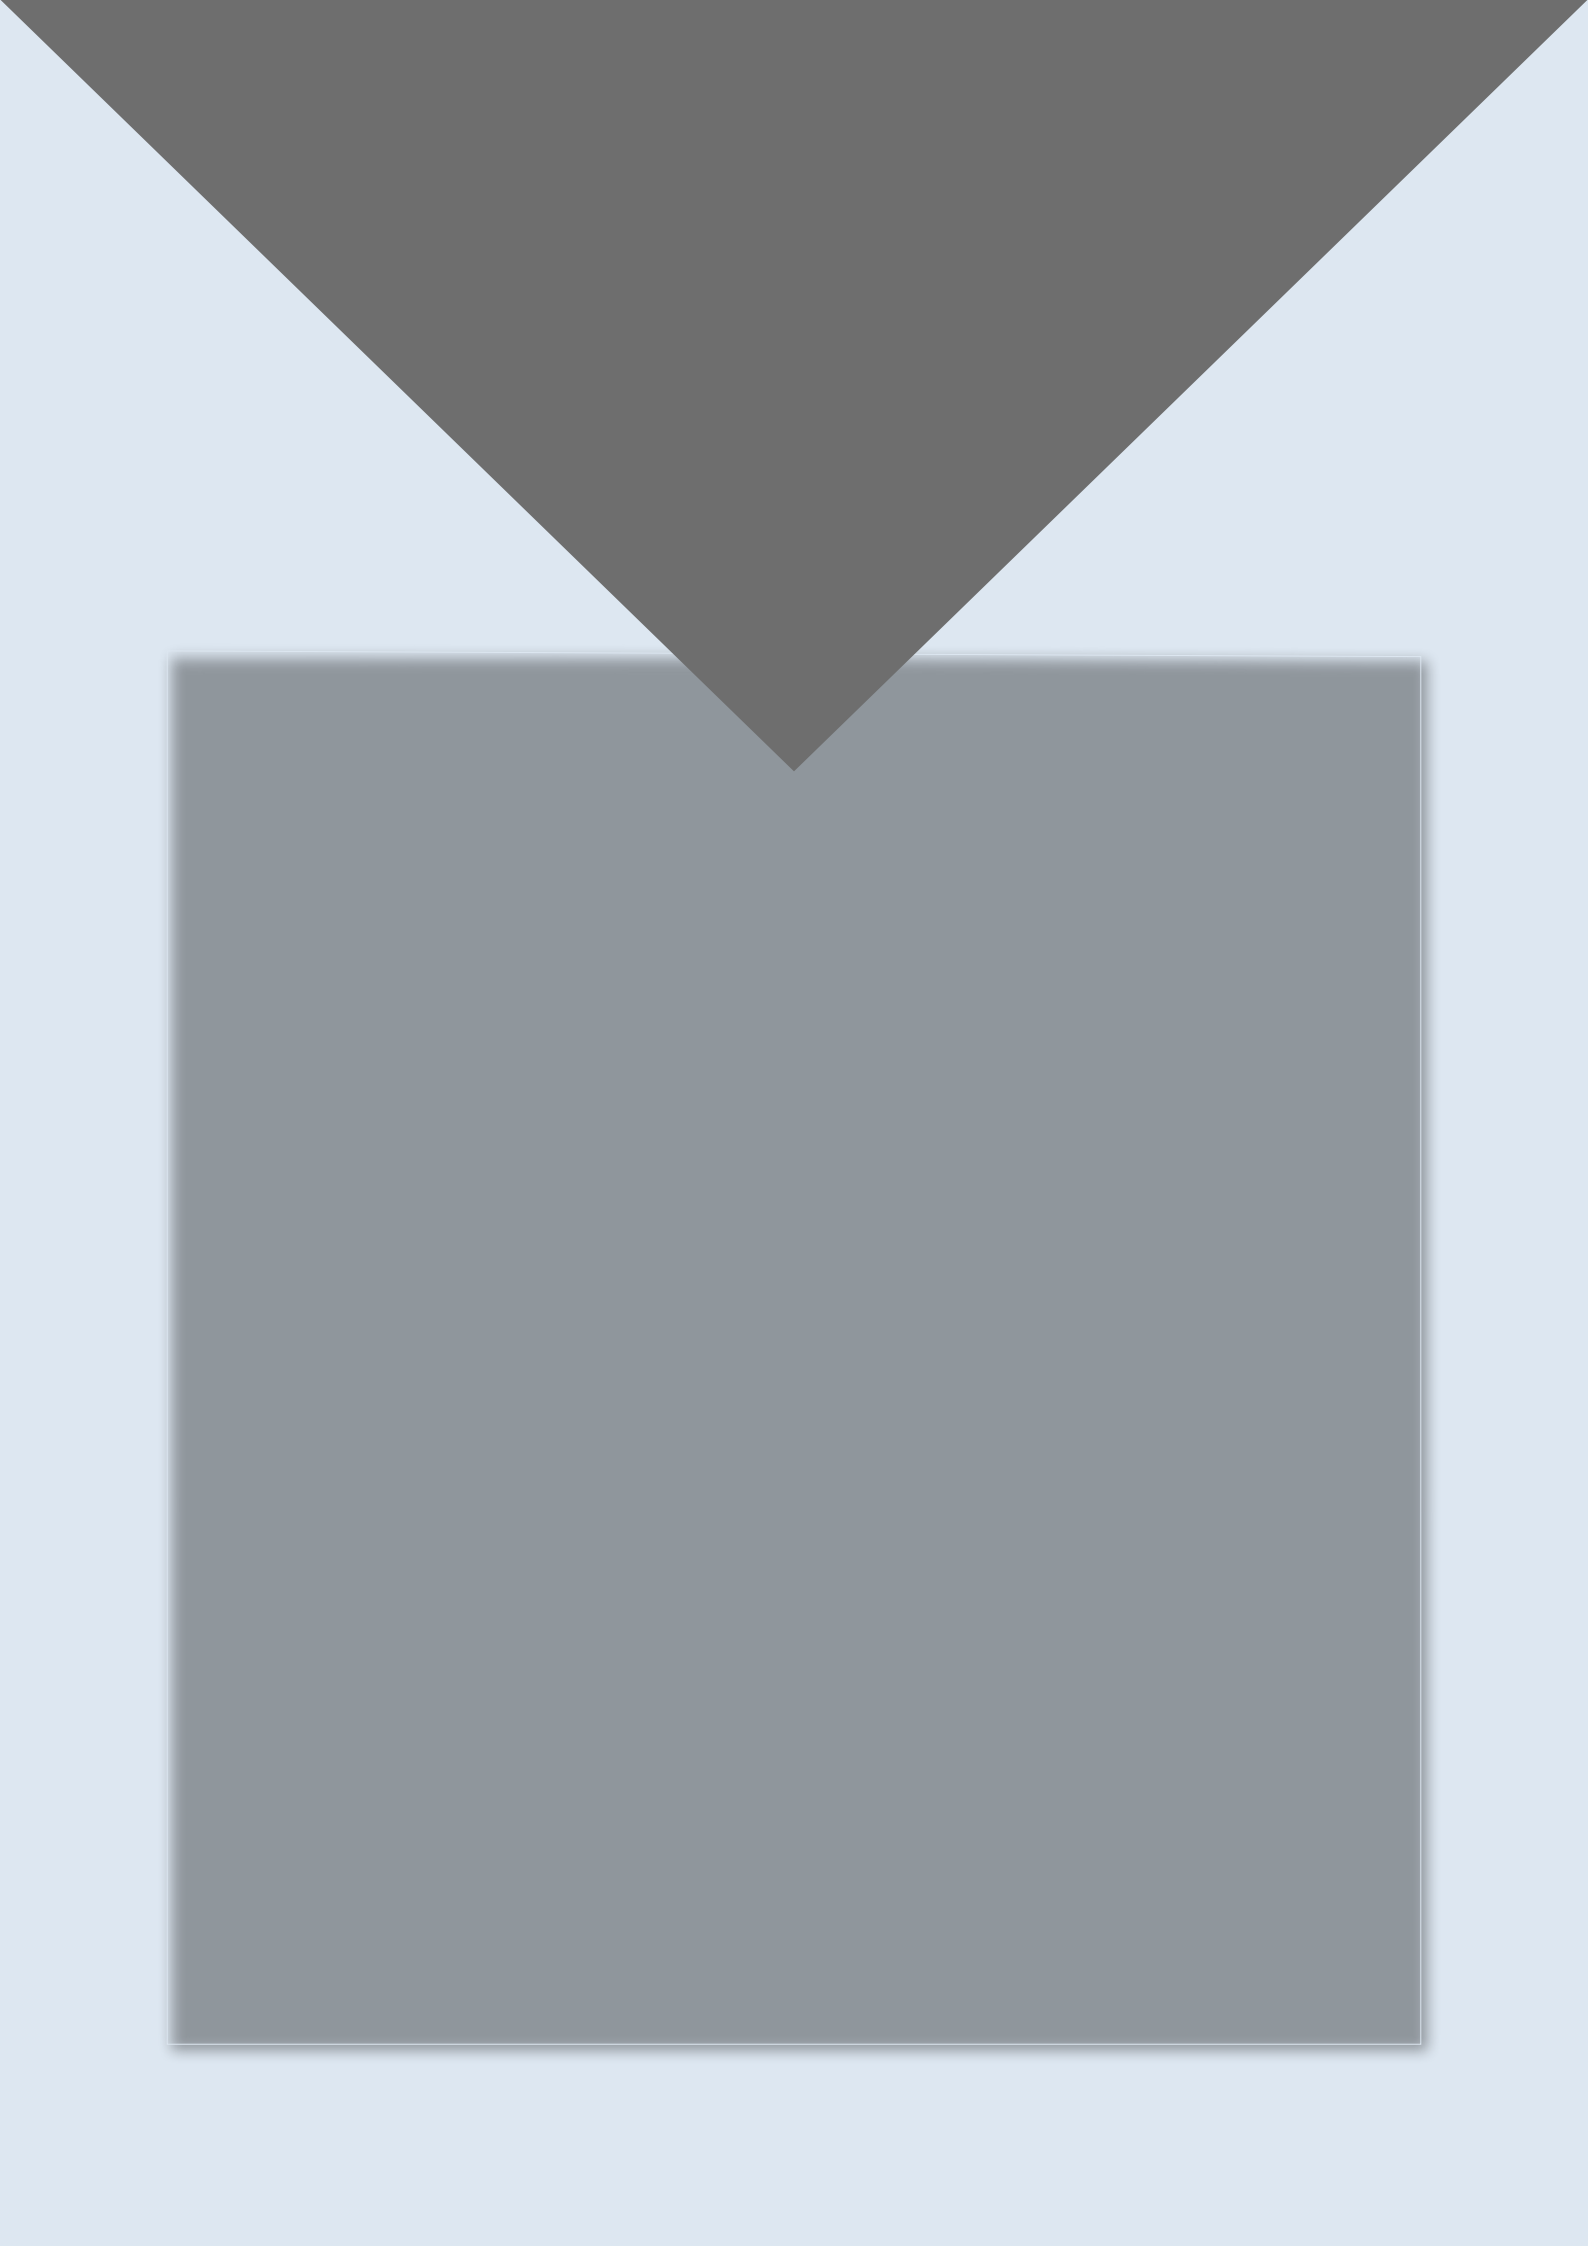

Blowout sale

These products relate to the new products in their original packaging, which are being discontinued. You can buy these products at significantly reduced prices, while stocks last. Before making your purchase please check the availability of the product you require.

Microscopes						
Model	Product description	School microscope	Laboratory microscope	Industrial microscope		
OBE 108	Compound microscope, binocular Achromatic; 4/10/20/40; WF 10×18; 3W LED	x	x			
OBE 109	Compound microscope, (rechargeable battery pack), binocular Achromatic; 4/10/20/40; WF 10×18; 3W LED	x	x			
OBE 110	Compound microscope, trinocular Achromatic; 4/10/20/40; WF 10×18; 3W LED	x	x			
OCO 255	Compound microscope (inverted), binocular Inf Plan; 10/20/40/20PH; HWF 10×20; 30W Hal		x			
OCO 256	Compound microscope (inverted), binocular Inf Plan; 10/20/40/20PH; HWF 10×20; 30W Hal		x			
OLE 161	Metallurgical microscope (Inverted), monocular Achromat; 10/20/40; WF 10×18; 3W LED (IL)	x		x		
OLF 162	Metallurgical microscope (inverted), binocular Achromat; 10/20/40; WF 10×18; 3W LED (IL)	x		x		
ODC 132	Microscope cameras 3MP CMOS; 1/2"; USB 2.0; Colour	x	x	x		
ODC 152	Microscope cameras 5MP CMOS; 1/2,5"; USB 2.0; Colour	x	x	x		
OSE 410	Stereomicroscope; binocular Greenough; 1/3×; WF 10×20	x	x	x		
OSE 411	Stereomicroscope; binocular Greenough; 2/4×; WF 10×20	x	x	x		
OSE 413	Stereomicroscope; binocular Greenough; 1/3×; WF 10×20; 0,21W LED	x	x	x		
OSE 414	Stereomicroscope; binocular Greenough; 2/4×; WF 10×20; 0,21W LED	x	x	x		
OSF 430	Stereomicroscope; binocular Greenough; 1/3×; WF 10×20; 0,21W LED	x	x	x		
OSF 434	Stereomicroscope; binocular Greenough; 1/2/3×; WF 10×20; 0,21W LED	x	x	x		
OSF 512	Stereo microscope head, binocular 1/2×; series OSF-5		x	x		
OSF 514	Stereo microscope head, binocular 1/2×; series OSF-5		x	x		

Note

Your personal KERN customer advisor will be pleased to put together an attractive package of discontinued models at special purchasing conditions, please just ask!

Microscopes						
Model	Product description	School microscope	Laboratory microscope	Industrial microscope		
OSF 516	Stereo microscope head, binocular 2/4×; series OSF-5		x	x		
OSF 522	Stereomicroscope; binocular Greenough; 1/2×; HSWF10×23	x	x	x		
OSF 524	Stereomicroscope; binocular Greenough; 1/3×; HSWF10×23		x	x		
OSF 525	Stereomicroscope; binocular Greenough; 1/3×; HSWF10×23; 3W LED		x	x		
OSF 526	Stereomicroscope; binocular Greenough; 2/4×; HSWF10×23		x	x		
OZG 497	Stereo zoom microscope (Gem), trinocular 220V Greenough; 0,75-5,0×; HSWF10×23; 10W Hal		x	x		
OZL 441	Stereo zoom microscope, trinocular Greenough; 1-4×; WF10×22; 0,35W LED	x		x		
OZL 453	Stereo zoom microscope, binocular Greenough; 0,75-5,0×; HSWF10×23	x	x	x		
OZO 551	Stereo zoom microscope, binocular Greenough; 0,8-7,0×; HSWF10×23		x	x		
OZO 552	Stereo zoom microscope, binocular Greenough; 0,8-7,0×; HSWF10×23; 3W LED		x	x		
OZO 553	Stereo zoom microscope, trinocular Greenough; 0,8-7,0×; HSWF10×23		x	x		
OZP 555	Stereo zoom microscope, binocular Greenough; 0,6-5,5×; HSWF10×23		x	x		
OZP 557	Stereo zoom microscope, trinocular Greenough; 0,6-5,5×; HSWF10×23		x	x		
OZC 583	Stereo zoom microscope (coaxial), trinocular Parallel; 1,8-6,5×; HSWF10×23; 2W LED			x		
OZR 563	Stereo zoom microscope, trinocular Parallel; 0,8-5,0×; HSWF10×22		x	x		
OZR 564	Stereo zoom microscope, trinocular Parallel; 0,8-5,0×; HSWF10×22; 3W LED		x	x		
OZS 573	Stereo zoom microscope, trinocular Parallel; 0,8-8,0×; HSWF10×22		x	x		

Checklist for your microscope – your requirements

1 Which kind of microscope do you need?

- | | | |
|---|--|----------------|
| <input type="checkbox"/> Compound microscope | primarily used for transparent/translucent preparation | Page 108 – 110 |
| <input type="checkbox"/> Stereo microscope | surface observation with 3-dimensional optic with slow/medium magnification | Page 111- 113 |
| <input type="checkbox"/> Phase contrast microscope | Preparations with minimal contrast/very translucent | Page 108 – 110 |
| <input type="checkbox"/> Fluorescence microscope | fluorescent structures, which are specific coloured or auto coloured | Page 108 – 110 |
| <input type="checkbox"/> Polarisation microscope | Preparations with refraction (anisotropic) for example Crystal | Page 108 – 110 |
| <input type="checkbox"/> Metallurgical microscope | surface observation of components, materials and minerals | Page 108 – 110 |
| <input type="checkbox"/> Inverted microscope | used primarily for culture fessel from cell culture/for very thick preparation | Page 108 – 110 |

State your intended use/
Describe your application: _____

State your previous
model/manufacturer: (if available) _____

State your min. and max.
magnification: _____

2 What type of eyepiece tube do you need for your application?

- | | |
|--|---|
| <input type="checkbox"/> Monocular eyepiece tube | view with one eye = 1 eyepiece available |
| <input type="checkbox"/> Binocular eyepiece tube | view with both eyes = 2 eyepieces available |
| <input type="checkbox"/> Trinocular eyepiece tube | view with both eyes + additional option to adapt a camera |
| <input type="checkbox"/> Digital eyepiece tube | view with both eyes + integrated camera |

Attention: look also at point 20 – Do you need a camera?

Additional comments: _____

3 Which illumination do you need for your application?

- | | |
|--|---|
| <input type="checkbox"/> Halogen transmitted illumination | very good illumination/also suitable for dark field and phase contrast |
| <input type="checkbox"/> LED transmitted illumination | extremely long life time/no heat generation |
| <input type="checkbox"/> Halogen reflecting illumination | additional illumination, e.g. for Polarisation and metallurgical microscopes |
| <input type="checkbox"/> LED incident illumination | only for stereo microscopes |
| <input type="checkbox"/> External illumination | external illumination could be ordered additionally, for example ring illumination unit, swan neck (cold light source), as Accessories) |

Interesting facts

- ▶ Halogen bulbs are still the standard in light microscopy, because they have a better brightness.
- ▶ The LED illumination have a much longer life time and the advantage that there is no heat generation. For this reason, we use LED illumination in our stereo microscopes as standard illumination.

Additional comments: _____

4 Do you need Koehler illumination?

- no
- fixed, pre-centred Koehler illumination** condenser is centred, can be height-adjusted and focussed, field diaphragm/aperture diaphragm available.
- full Koehler illumination** condenser can be fully centred and focussed, field diaphragm/aperture diaphragm available.

State your intended use/
Describe your application:

5 How many objectives would you like to use?

- 4 objectives** Quadplex nosepiece
- 5 objectives** Quintuple nosepiece

6 What magnification (objectives) do you need?

- 4× objective (40× magnification)** when using the 10× magnification eyepiece
- 20× objective (200× magnification)** when using the 10× magnification eyepiece
- 40× objective (400× magnification)** when using the 10× magnification eyepiece
- 60× objective (600× magnification)** when using the 10× magnification eyepiece
- 100× objective (1000× magnification)** when using the 10× magnification eyepiece

Interesting facts

► Magnification formula: objective magnification × eyepiece magnification = Total magnification

State the magnification you require

Additional phase contrast objective

7 What quality do you need for the objective?

- Achromatic** DIN standard objectives
- Plan achromatic** DIN standard objectives
- Infinity E-Plan/Semi Plan** infinitely corrected objectives for professional methods
- Achromatic Infinity Plan** infinitely corrected objectives for professional methods

Additional comments:

8 What eyepiece diameter (visual field) and what eyepiece magnification do you need?

10× magnification

- \varnothing 18 mm
- \varnothing 18 mm with pointer needle
- \varnothing 18 mm with 0.1 mm scale
- \varnothing 20 mm
- \varnothing 20 mm with 0.1 mm scale

Dioptre adjustment

- Yes, on one side
- Yes, on both sides
- No

Further magnifications possible:
(State the magnification you require:)

9 Do you need a camera to save the documents?

- yes
- no

Interesting facts

▶ With a trinocular microscope, you always have to use a C-mount adapter to adapt a camera!

Additional comments:
(e.g. required number of Mpx etc.)

10 Do you need any further functions?

- Dark field unit
- Polarisation unit
- Fluorescent unit
- Phase-contrast unit
- Colour filter
- Additional objectives

Additional comments:

Statement of phase contrast magnification:

Statement Fluorescence-channel
(colour UV/V/B/G):

11 Further technical characteristics:

State your requirements:

Technical requirements of stereo microscope

12 What type of eyepiece tube do you need for your application?

- Binocular eyepiece tube** view with both eyes, two eyepieces
- Trinocular eyepiece tube** view with both eyes and additional option to adapt a camera

Attention: look also at point 20 – Do you need a camera?

Additional comments:

13 Please select the required optical system?

- Greenough** beam paths which are completely separate from each other
- Parallel/ABBE** beam paths which are completely separate from each other which run parallel

Additional comments:

14 Which illumination do you need for your application?

- None** stereo microscope without illumination
- Incident illumination** incident illumination e.g. LED or halogen
- Transmitted illumination** additional illumination for translucent samples
- Coaxial illumination** integrated coaxial illumination for selective depth of focus
- External illumination** external illumination could be ordered additionally, for example ring illumination unit, swan neck (cold light source), as Accessories

Additional comments:

15 What type of magnification do you need?

- Rotation objective** changing the magnification by rotating the objective
- Zoom** continuous magnification

Additional comments:

16 What magnification do you need?

Minimum: _____ Maximum: _____

Additional comments: _____

Interesting facts

► Magnification formula: Eyepiece magnification × objective magnification (zoom) = Total magnification

17 What eyepiece diameter (visual field) and what eyepiece magnification do you need?

10× magnification

∅ 20 mm

∅ 22 mm

∅ 23 mm

Dioptre adjustment

Yes, on one side

Yes, on both sides

Further magnifications possible:
(State the magnification you require:)

18 What working distance do you need?

Minimum: _____ mm Maximum: _____ mm

Additional comments: _____

Interesting facts

► The working distance is the distance between the objective and the sample.

19 What size of field of view do you need?

Minimum: _____ mm Maximum: _____ mm

Additional comments: _____

Interesting facts

► The field of view is the section which is shown through the magnification. If the magnification (Zoom) is very high, the field of view will be reduced. By magnifying and focussing a specific section, it is not possible to capture the whole sample.

20 Do you need a camera to save the documents?

- yes
- no

Interesting facts

▶ With a trinocular microscope, you always have to use a C-mount adapter to adapt a camera!

Additional comments:
(e.g. required number of Mpx etc.)

21 Do you need any further functions?

- Dark field unit
- Stand inlays (preparation-background) e.g. glass, opaque glass, black, white
- Universal stand
- Mechanical bench

Additional comments:

22 Further technical characteristics:

State your requirements:

Please fill in your contact, that we could make you an offer for a suitable microscope

Customer number:

Company:

Surname, first name:

Street:

Postcode/Area:

Country:

Tel.:

Fax:

E-Mail:

Checklist for your refractometer – your requirements

1 Which kind of refractometer do you need?

- Analogue refractometer** hand-held device for rapid analysis/can be used for mobile applications
- Digital refractometer** digital, hand-held device for rapid analysis/can be used for mobile applications
- Analogue ABBE refractometer** stand benchtop device/refraction index & Brix – Measuring for all applications

State your intended use/
Describe your application:

2 State your area of application

- Sugar/lubricants** determining the sugar content in e.g. fruit, vegetables, juice, drinks which contain sugar, lubricants for drills, milling machines and lathes
- Honey** determining the sugar content, water content and relative density of liquids
- Salt** determining the sodium chloride in water (salinity) and determining the salt in water
- Wine** determining the alcohol content, degree of ripeness through fruit sugar
- Urine** Determination of specific urine weight (density), the serum content (serum protein in urine) and the refraction index
- Industry/motor vehicles** Determination of glycol concentration (ethylene, propylene), of battery fluid, screen wash
- Refractive index** determining the refraction index of different substances

What sort of results are you expecting:
(to determine the scale)

3 Do you need automatic temperature compensation?

- yes** ATC allows you take measurements with different environmental, device and sample temperatures between 10 °C and 30 °C
- no** without ATC the environmental, device and sample temperatures must be 20° C in order to get a precise measuring result. If the table is different, the result must be corrected manually.

Please fill in your contact, that we could make you an offer for a suitable refractometer

Customer number:

Company:

Surname, first name:

Street:

Postcode/Area:

Country:

Tel.:

Fax:

E-Mail:
