


# PRODUKT DATABLAD

449117804




## LIGELØBSFILTER MUF/MUF

KOMPONENT	MATERIALE	STANDARD
KROP	Messing CW617N	EN 12165
MØTRIK	Messing CW617N	EN 12165
FILTER	Rustfrit stål AISI 304	6900-71
PAKNING	NBR gummi	
GEVIND		EN-ISO 228

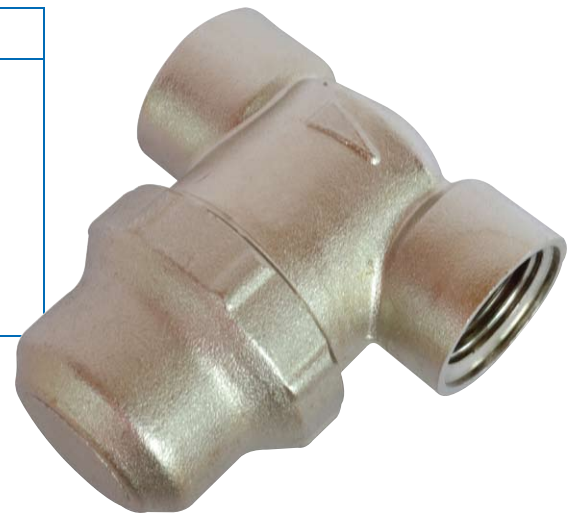

FILTER MICRON	STR.	VARENR.	A MM	B MM	C MM	D MM	KV M <sup>3</sup> /H
800	3/8"	449117803	50	25	51	42	2.60
	1/2"	449117804	56	28	53.5	42	3.40
	3/4"	449117806	67	33.5	51.5	47.5	5.00
	1"	449117808	80	40	55.5	58	8.70
	1 1/4"	449117810	92	46	68.5	70	14.10
	1 1/2"	449117811	110	55	93.5	80	26.50
	2"	449117812	110	55	93.5	80	26.50
	2 1/2"	-	180	90	193	186	104.70
	3"	-	188	94	193	186	108.20
4"	-	202	101	193	186	111.80	
300	3/8"	-	50	25	51	42	2.00
	1/2"	-	56	28	53.5	42	3.30
	3/4"	-	67	33.5	51.5	47.5	4.90
	1"	-	80	40	55.5	58	8.40
	1 1/4"	-	92	46	68.5	70	13.70
	1 1/2"	-	110	55	93.5	80	24.40
	2"	-	110	55	93.5	80	24.40
	2 1/2"	-	180	90	193	186	100.10
	3"	-	188	94	193	186	101.70
4"	-	202	101	193	186	108.00	
100	3/8"	-	50	25	51	42	2.00
	1/2"	-	56	28	53.5	42	3.30
	3/4"	-	67	33.5	51.5	47.5	4.90
	1"	-	80	40	55.5	58	8.20
	1 1/4"	-	92	46	68.5	70	13.40
	1 1/2"	-	110	55	93.5	80	23.60
	2"	-	110	55	93.5	80	23.60
	2 1/2"	-	180	90	193	186	-
	3"	-	188	94	193	186	-
4"	-	202	101	193	186	-	
50	3/8"	-	50	25	51	42	1.60
	1/2"	-	56	28	53.5	42	1.90
	3/4"	-	67	33.5	51.5	47.5	3.50
	1"	-	80	40	55.5	58	4.30
	1 1/4"	-	92	46	68.5	70	6.60
	1 1/2"	-	110	55	93.5	80	11.20
	2"	-	110	55	93.5	80	11.20
	2 1/2"	-	180	90	193	186	-
	3"	-	188	94	193	186	-
4"	-	202	101	193	186	-	

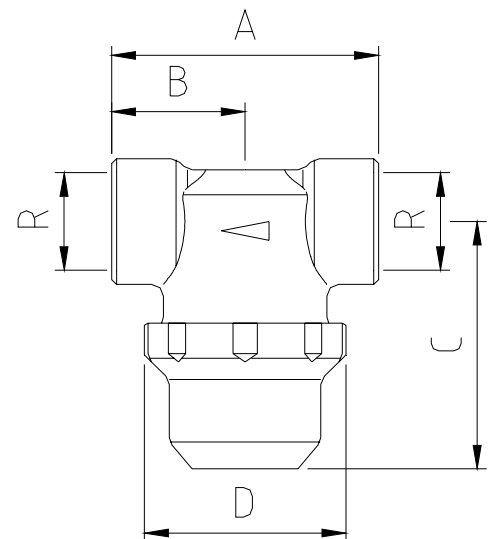

MAKSIMALT DRIFTSTRYK

16 BAR

MAX ARBEJDSTEMPERATUR

100 °C

WWW.ROYKON.COM


ROYKON A/S

Navervej 8 · 7000 · Fredericia

# PRODUKT DATABLAD



## TRYKTAB DIAGRAM

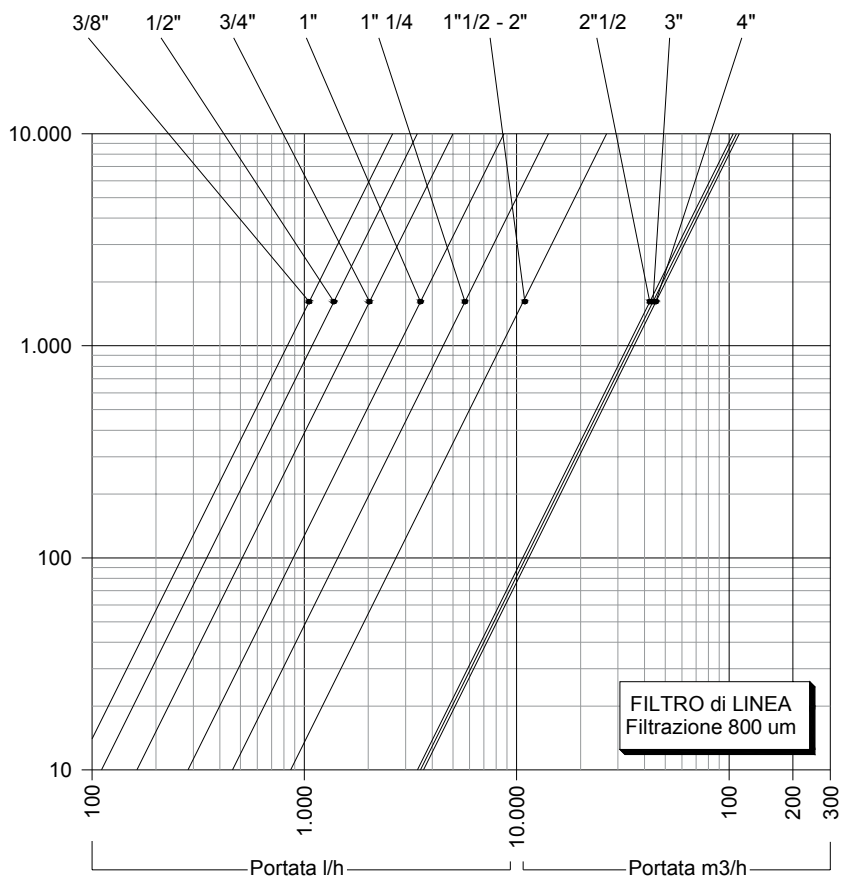

## MONTERING

