

Manufactured to a high standard, this product will, if used according to these instructions and properly maintained, give you years of trouble free performance.

1. SAFETY INSTRUCTIONS

IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS AND CAUTIONS. USE THIS PRODUCT CORRECTLY AND WITH CARE, FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY.

1.1 GENERAL SAFETY INSTRUCTIONS

Remove all packaging and store it away from children, check the package and contents for visible damage or tampering.

Familiarise yourself with the applications and limitations.

Ensure the equipment is in good order and condition before use. If in any doubt, do not use the unit and contact your supplier.

Only use recommended attachments and parts. To use unauthorised parts may be dangerous and will invalidate your warranty.


X **DO NOT** use this unit to perform a task for which it has not been designed.

2. INTRODUCTION & INSTALLING

The HLWPARARM is a arm used for the mounting of a single HLW heater to large professional parasols. The arm allows the HLW to be mounted to the parasol on the centre flange bracket as per illustration below. The simple lift and twist action allows the HLW to be lowered on to the centre mast enabling the parasol to be closed without the need to remove the heaters. Usually 3 or 4 heaters are used per parasol.



- 2.1. Decide on where your HLWPARARM's are to be mounted on the parasol mast flange and mark the hole positions for drilling.
- 2.2. Drill the 3 holes using a Ø6.5mm bit at 26mm spacing. Touch up the drilled paint work to ensure adequate corrosion protection.
- 2.3. Offer up the HLWPARARM to the mast flange, inserting the three studs into the holes just drilled. Fit the M6 Stainless Nylock nuts and tighten up well.
- 2.4. On the other end of the HLWPARARM, you can now mount your HLW Outdoor Heater using the bolts and star washers provided.
- 2.5. Adjust the mounted angle of the heater by adjusting the long screw on the flanged end of the HLWPARARM, using the Allen key supplied.
- 2.6. Cable tie the HLW wiring to the parasol arms in such a way so as not to trap the cable when folding, eliminating any electrical problems in the future. Always wire the Heater in accordance with the supplied heater instructions.
- 2.7. By lifting and with a twist action, the assembly can be folded downwards so that the parasol can be closed.
VERY IMPORTANT WARNING: Before closing the parasol, ensure that the heater is turned off and has cooled down. In addition, isolate the power supply to the heater so that it cannot be accidentally turned on, as this could result in the parasol canvas material catching fire.

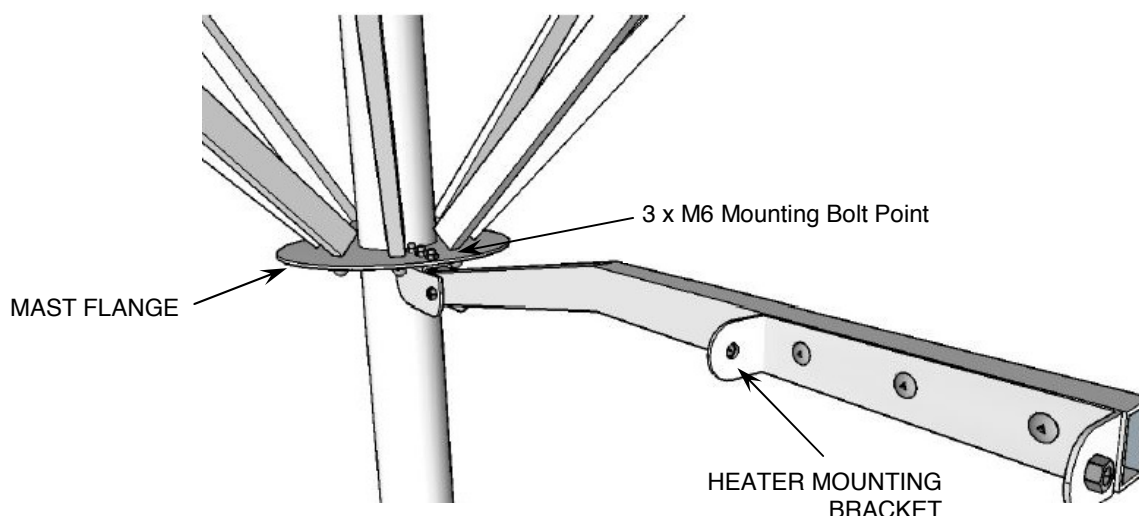

Victory Lighting Ltd

www.victorylighting.co.uk

e3light ApS
Møgelgaardsvej 19
8520 Lystrup

tlf. +45 87776687
mail: sales@e3light.com
www.e3lightpro.dk

NOTE: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

IMPORTANT: No liability is accepted for incorrect use of this product.