




1320 DIGI-MET® Pocket calipers



1320 416

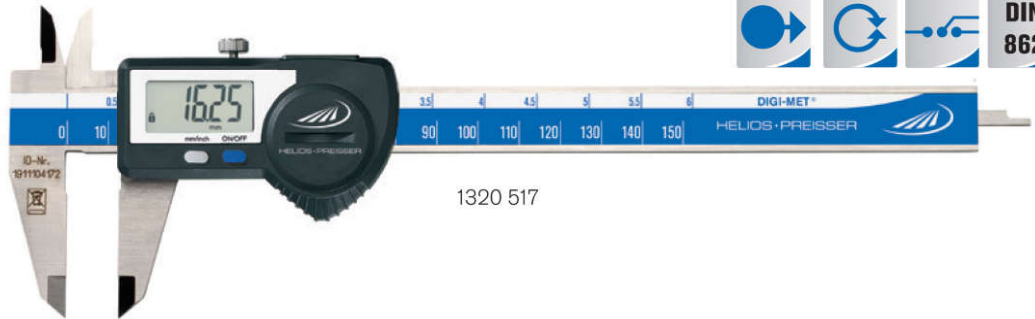

1320 517



Model

- Inductive measuring system, resistant to moisture and sweat
- Stainless steel
- LCD display 11 mm without data output, 7.5 mm with data output
- DIN 862
- Locking screw
- Inside cross points

- Four way measurement with measuring ranges 150 and 200 mm
- Three way measurement with measuring range 300 mm

Functions

- ON / OFF
- **Quick-Start**
- **Quick-Lock** (key lock)
- Set to zero at any point
- mm / inch switching
- **PRESET-Function** (setting a numerical value)

Delivery

- Plastic case



Video electronic

✕	Measuring range		Jaw length		Reading		Error limit	Depth gauge	Order no.
	mm	inch	mm	inch	mm	inch			
Without data output									
▪	0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	round 1.5	1320 416
▪	0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	rectangular	1320 417
With DATA VARIABLE									
▪	0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	round 1.5	1320 516
▪	0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	rectangular	1320 517
▪	0 - 200	0 - 8	50	2.0	0.01	.0005	0.03	rectangular	1320 519
▪	0 - 300	0 - 12	65	2.5	0.01	.0005	0.03	none	1320 522
With DATA VARIABLE, with extra long cross points (40 mm)									
▪	0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	round 1.5	1320 518

More information on 1320 518 on page 58



Accessories

	Order no.
Battery, 3V-Lithium, CR 2032	0220 704
Data cable DATA VARIABLE to digimatic	1998 501
Data cable DATA VARIABLE to RS232	1997 501
Data cable DATA VARIABLE to USB	1998 720