

Stellwinkel Normalstahl, verzinkt

S264

Joiner's adjustable bevels, zinc plated

- verzinkt
- rostgeschützt
- mit Flügelmutter

- made of carbon steel
- zinc plated
- with fixing screw



| Bestell-Nr. Order-No. | Schienenlänge Size mm |
|--------------------------|--------------------------|
| 03044010 | 150 |
| 03044011 | 200 |
| 03044012 | 250 |
| 03044013 | 300 |
| 03044014 | 400 |
| 03044015 | 500 |


Digitaler Gradmesser und Stellwinkel, direkte Ablesung 0 - 360°, Anzeige 0,1°

S265

Digital protractor, joiners adjustable bevel, 0 - 360°, 0,1°

- direkte Digitalablesung
- Schiene 27,2 x 1,2 mm, Ablesung mm/cm

- direct reading 0 - 180°
- rule 27.2 x 1.2 mm, reading mm/cm

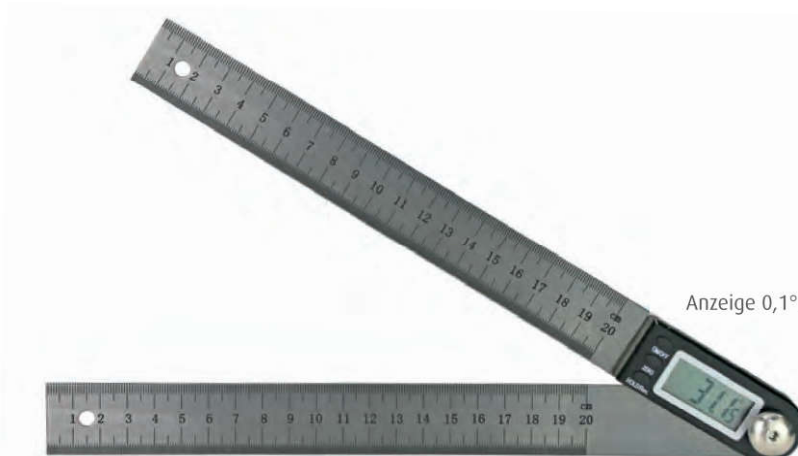

Anzeige 0,1° / Display 0,1°

Schiene 27,2 x 1,2 mm / rule 27,2 x 1,2 mm
Ablesung mm/cm / reading mm/cm

| | |
|------------------|-------------------------------------|
| ON / OFF | <input checked="" type="checkbox"/> |
| mm / inch (Unit) | <input type="checkbox"/> |
| HOLD-Funktion | <input checked="" type="checkbox"/> |
| ABS-Funktion | <input type="checkbox"/> |
| Absolut-System | <input type="checkbox"/> |
| PRESET | <input type="checkbox"/> |
| Datenausgang | <input type="checkbox"/> |
| Stromversorgung | 3 V CR 2032 |

| Bestell-Nr. Order-No. | Schiene Blade mm | Ablesung Reading |
|--------------------------|---------------------|---------------------|
| 05060017 | 200 | 0,1° |
| 05060018 | 300 | 0,1° |