
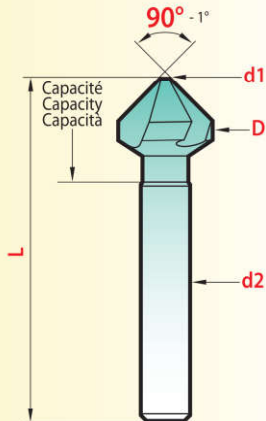


TRI-DENT

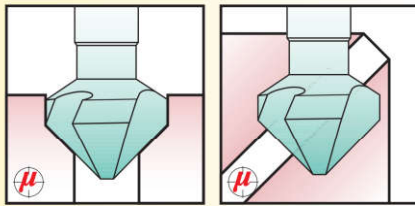

FRAISES À NOYER
Trois dents
90° - HSS - HSS-Co

Three flute
COUNTERSINKS

AVELLANADORES
De tres labios
90° - HSS - HSS-Co

FRESE CONICHE
con tre denti

90°

DIN 335 - C



D z9 mm (inch)	d1 maxi	d2 h9	L ± 1	Classic 4307	magafor 431	TiN 4831	Red'X 4931
4,0	1,3	4	40				
4,3	1,3	4	40				
5,0	1,5	4	40				
5,3	1,5	4	40				
5,8	1,5	5 (1)	45				
5,8	1,5	6 (1)	45				
6,0	1,5	5 (1)	45				
6,0	1,5	6 (1)	45				
6,3	1,5	5 (1)	45				
6,3	1,5	6 (1)	45				
6,35 (1/4")	1,5	6,35	45				
7,0	1,8	6	50				
7,3	1,8	6	50				
7,93 (5/16")	2,0	6,35	45				
8,0	2,0	6	50				
8,3	2,0	6	50				
9,0	2,2	6	50				
9,4	2,2	6	50				
9,52 (3/8")	2,5	6,35	50				
10,0	2,5	6	50				
10,4	2,5	6	50				
11,5	2,8	8	56				
12,0	2,8	8	56				
12,4	2,8	8	56				
12,70 (1/2")	2,9	6,35	50				
13,4	2,9	8	56				
14,4	2,9	8	56				
15,0	3,2	8 (1)	56				
15,0	3,2	10 (1)	60				
15,87 (5/8")	3,2	9,52	60				
16,5	3,2	8 (1)	56				
16,5	3,2	10 (1)	60				
19,0	3,5	10	63				
19,05 (3/4")	3,5	9,52	60				
20,5	3,5	10	63				
23,0	3,8	10	67				
25,0	3,8	10	67				
25,4 (1")	3,8	9,52	70				
26,0	3,8	10	67				
28,0	4,0	12	71				
30,0	4,2	12	71				
31,0	4,2	12	71				




(1) Préciser le Ø de queue sur vos commandes Please mention the shank Ø when ordering.
Precisar el diámetro del mango en el pedido. Precisare nei vostri ordini il Ø del codolo.



performances

Vc = vitesse speed velocidad velocidad = m/min.
 Vf = avance feed avance avanzamento = mm/min.
 $\frac{Vc \times 1000}{\pi \times \varnothing} =$ Tours par min. Rev. / min.
 Giri / min. revoluciones por minuto.

ÉBAVURAGE - CHANFREINAGE DEBURRING - COUNTERSINKING DESBARBADO - AVELLANADO SVASATURA - SBAVATURA



Recommandation
 Recomendación
 Suggestimento

N° 1

N° 2

Autres
 Otros

Others

Altre soluzioni

MATIÈRE MATERIAL MATERIALE		HSS-Co	HSS-Co + TiN	HSS 8% Co	HSS 8% Co + Red'X	Carbure Carbide Metallo Duro	Carbure Carbide + Hard'X	HSS-Co	HSS-Co + TiN	HSS-Co	HSS-Co + TiN
Pages Páginas Page		47 ~ 57		49		49 ~ 56		60 - 61		62 - 63	
Aciers Steels Aceros Acciai ≤ 500 N/mm ²	Vc Ø 10 Vf Ø 30	17~22 85 45 30	17~22 85 45 30	35~45 165 85 55	35~45 165 85 55	40~80 250 125 85	40~80 250 125 85	35~45 165 85 55	35~45 165 85 55	35~45 165 85 55	35~45 165 85 55
Aciers Steels Aceros Acciai 500 ~ 800 N/mm ²	Vc Ø 10 Vf Ø 30	10~15 60 30 20	10~15 60 30 20	20~30 110 55 35	20~30 110 55 35	30~60 170 85 60	30~60 170 85 60	20~30 110 55 35	20~30 110 55 35	20~30 110 55 35	20~30 110 55 35
Aciers Steels Aceros Acciai 800 ~ 1000 N/mm ²	Vc Ø 10 Vf Ø 30	8~12 35 25 15	8~12 35 25 15	16~20 55 35 25	16~20 55 35 25	20~40 100 60 45	20~40 100 60 45	15~20 55 35 25	15~20 55 35 25	15~20 55 35 25	15~20 55 35 25
Inox Stainless steel Aceros Inoxidables 1000 ~ 1300 N/mm ²	Vc Ø 10 Vf Ø 30	6~10 30 15 10	6~10 30 15 10	12~15 45 25 20	12~15 45 25 20	20~40 100 60 40	20~40 100 60 40	12~15 45 25 20	12~15 45 25 20	12~15 45 25 20	12~15 45 25 20
Acier anti-abrasion Abrasive tough Steel < 420 HB Acero resistente a la abrasión	Vc Ø 10 Vf Ø 30			12~15 40 30 20	12~15 40 30 20	15~20 55 35 25	15~20 55 35 25				
Bronze dur Inconel, Nimonic Hard bronze Bronze/Bronzo duro	Vc Ø 10 Vf Ø 30			4~6 16 8 6	4~6 16 8 6	10~12 30 16 10	10~12 30 16 10				
Acier traité Treated steel ≥ 60 HRC Acero tratado Acciai trattati	Vc Ø 10 Vf Ø 30					8~10 20 10 8	10~12 30 16 10				
Fonte Cast iron Fundición Ghisa	Vc Ø 10 Vf Ø 30	15~25 70 40 30	15~25 70 40 30	20~40 125 75 50	20~40 125 75 50	40~80 250 150 100	40~80 250 150 100	20~40 125 75 50	20~40 125 75 50	20~40 125 75 50	20~40 125 75 50
Aluminium Alluminio	Vc Ø 10 Vf Ø 30	35~45 200 130 110	35~45 200 130 110	50~60 255 180 150	50~60 255 180 150	40~100 350 230 200	40~100 350 230 200	50~60 255 180 150	50~60 255 180 150	50~60 255 180 150	50~60 255 180 150
Laiton Brass Bronze Latòn - Bronce Bronzo	Vc Ø 10 Vf Ø 30	20~30 120 85 70	20~30 120 85 70	30~40 150 110 90	30~40 150 110 90			30~40 150 110 90	30~40 150 110 90	30~40 150 110 90	30~40 150 110 90
Cuivre Copper Cobre Rame	Vc Ø 10 Vf Ø 30	15~25 95 60 45	15~25 95 60 45	20~30 120 80 65	20~30 120 80 65	50~80 300 200 175	50~80 300 200 175	20~30 120 80 65	20~30 120 80 65	20~30 120 80 65	20~30 120 80 65
Stratifié Laminated Laminados Laminati	Vc Ø 10 Vf Ø 30	35~70 300 200 150	35~70 300 200 150	35~70 300 200 150	35~70 300 200 150			50~100 400 300 250	50~100 400 300 250	50~100 400 300 250	50~100 400 300 250
Nylon PVC Plastics / Plásticos Plastiche	Vc Ø 10 Vf Ø 30	35~70 400 300 250	35~70 400 300 250	35~70 400 300 250	35~70 400 300 250			50~100 450 350 300	50~100 450 350 300	50~100 450 350 300	50~100 450 350 300