


quality DIN 866 form A

- mm graduation on bottom edge
- 5 mm protection space on both ends
- flat side finely ground
- vertical edges finely ground, can be used as a rule
- stainless or carbon steel quality available

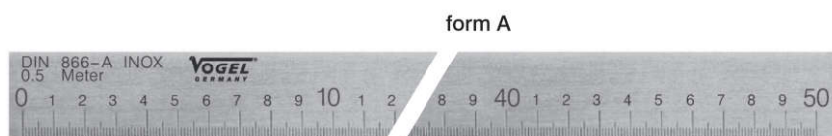

quality DIN 866 form B

- mm graduation on bottom edge
- without protection-space end, at left side
- flat side finely ground
- vertical edges ground
- stainless or carbon steel quality available



Notice
We charge transport- and packing-costs for article marked with *!



| ART NO | ART NO | | | KG | ART NO CC graduation only DIN 2014/32/EU | ART NO CC acc. to DIN 866 | ART NO wooden case |
|------------------|-------------|------|---------|------|---|------------------------------------|-----------------------|
| DIN 866 / A INOX | DIN 866 / A | | | | | | |
| 1691000050 | 1691010050 | 500 | 30 x 6 | 0.8 | 1694005 | 1694005/866 | 1699050-A |
| 1691000100 | 1691010100 | 1000 | 40 x 8 | 2.5 | 1694010 | 1694010/866 | 1699100-A |
| 1691000150 | 1691010150 | 1500 | 40 x 8 | 3.7 | 1694015 | 1694015/866 | 1699150-A |
| 1691000200* | 1691010200* | 2000 | 50 x 10 | 7.5 | 1694020 | 1694020/866 | 1699200-A* |
| 1691000300* | 1691010300* | 3000 | 50 x 10 | 12.0 | 1694030 | - | - |
| 1691000400* | 1691010400* | 4000 | 60 x 12 | 25.6 | 1694040 | - | - |
| 1691000500* | 1691010500* | 5000 | 70 x 15 | 33.5 | 1694050 | - | - |
| DIN 866 / B INOX | DIN 866 / B | | | | | | |
| 1692000050 | 1692010050 | 500 | 25 x 5 | 0.5 | 1694005 | 1694005/866 | 1699050-B |
| 1692000100 | 1692010100 | 1000 | 30 x 6 | 1.5 | 1694010 | 1694010/866 | 1699100-B |
| 1692000150 | 1692010150 | 1500 | 30 x 6 | 2.1 | 1694015 | 1694015/866 | 1699150-B |
| 1692000200* | 1692010200* | 2000 | 40 x 8 | 4.8 | 1694020 | 1694020/866 | 1699200-B* |
| 1692000300* | 1692010300* | 3000 | 40 x 8 | 7.5 | 1694030 | - | - |
| 1692000400* | 1692010400* | 4000 | 50 x 10 | 15.0 | 1694040 | - | - |
| 1692000500* | 1692010500* | 5000 | 60 x 12 | 32.0 | 1694050 | - | - |

Tolerances according to DIN 866

| total length graduation mm | 500 | 1000 | 1500 | 2000 | 3000 | 4000 | 5000 |
|----------------------------|-------|------|-------|------|------|------|------|
| tolerance form A | 0.030 | 0.04 | 0.05 | 0.06 | 0.08 | 0.10 | 0.12 |
| tolerance form B | 0.075 | 0.10 | 0.125 | 0.15 | 0.20 | 0.25 | 0.30 |