


Flens tabel

DIN EN 1092-2

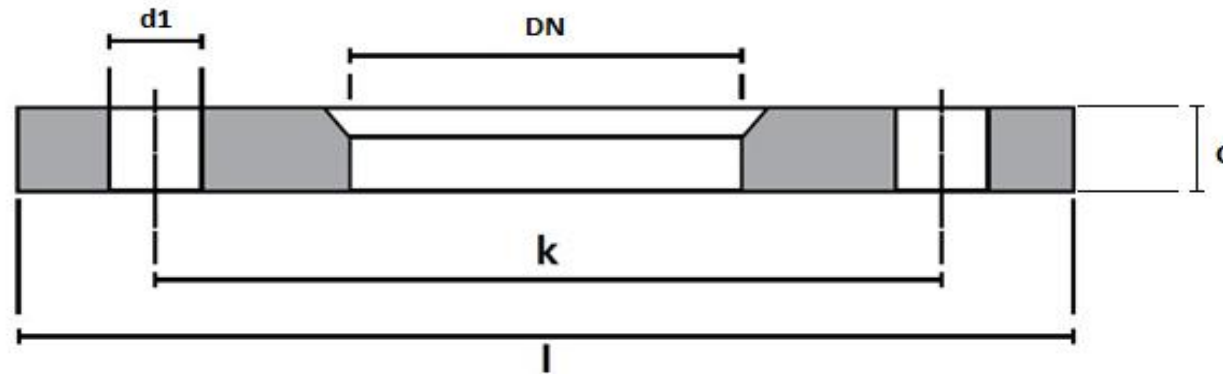

Standaard

DN	PN6				PN10					PN16					PN25					PN40				
	I	K	d1	No.	I	K	C	d1	No.	I	K	C	d1	No.	I	K	C	d1	No.	I	K	C	d1	No.
40	130	100	14	4	150	110	19	19	4	150	110	19	19	4	150	110	19	19	4	150	110	19	19	4
50	140	110	14	4	165	125	19	19	4	165	125	19	19	4	165	125	19	19	4	165	125	19	19	4
65	160	130	14	4	185	145	19	19	4	185	145	19	19	4	185	145	19	19	8	185	145	19	19	8
80	190	150	18	4	200	160	19	19	8	200	160	19	19	8	200	160	19	19	8	200	160	19	19	8
100	210	170	18	4	220	180	19	19	8	220	180	19	19	8	235	190	19	23	8	235	190	19	23	8
125	240	200	18	8	250	210	19	19	8	250	210	19	19	8	270	220	19	28	8	270	220	23,5	28	8
150	265	225	18	8	285	240	19	23	8	285	240	19	23	8	300	250	20	28	8	300	250	26	28	8
200	320	280	18	8	340	295	20	23	8	340	295	20	23	12	360	310	22	28	12	375	320	30	31	12
250	375	335	18	12	400	350	22	23	12	400	355	22	28	12	425	370	24,5	31	12	450	385	34,5	34	12
300	440	395	22	12	455	400	24,5	23	12	455	410	24,5	28	12	485	430	27,5	31	16	515	450	39,5	34	16
350	490	445	22	12	505	460	24,5	23	16	520	470	26,5	28	16	555	490	30	34	16	580	510	44	37	16
400	540	495	22	16	565	515	24,5	28	16	580	525	28	31	16	620	550	32	37	16	660	585	48	40	16
450	595	550	22	16	615	565	25,5	28	20	640	585	30	31	20	670	600	34,5	37	20	685	610	49	40	20
500	645	600	22	20	670	620	26,5	28	20	715	650	31,5	34	20	730	660	36,5	37	20	755	670	52	43	20
600	755	705	26	20	780	725	30	31	20	840	770	36	37	20	845	770	42	40	20	890	795	58	49	20
700	860	810	26	24	895	840	32,5	31	24	910	840	39,5	37	24	960	875	46,5	43	24					
800	975	920	30	24	1015	950	35	34	24	1025	950	43	40	24	1085	990	51	49	24					
900					1115	1050	37,5	34	28	1125	1050	46,5	40	28	1185	1090	55,5	49	28					
1000					1230	1160	40	37	28	1255	1170	50	43	28	1320	1210	60	56	28					
1200					1455	1380	45	40	32	1485	1390	57	48	32	1530	1420	69	56	32					

K = Bout cirkel diameter

Tot en met DN150 PN10 en PN16 hebben dezelfde doelen.