

Product design features:

- EUROBAT specification Long Life 12+ years
- Extremely high float life performance
- Low self discharge rates
- Low internal resistance
- Wide range of operating temperature -20°C to +55°C
- Compact design with high energy density
- ETSI Rack integration
- One-way valve regulated system with flame-arrestor
- Internal gas recombination efficiency 98% - 99%
- Low installation cost, maintenance free product
- Delivered ready for use
- Shock resistant FR ABS container and lid
- Sealed for leak-free operation, inline automatic tested
- Female M8 brass terminals with no need for retightening
- Non-hazardous cargo for ground, sea and air transport
- Fully recyclable product


ISO 9001, ISO 14001, OHSAS 18001, AQAP 2110



All VRLA batteries are fully compliant with IEC 60 896 - 21/22, EN 60 896 - part 2, BS 6290 - part 4

Specifications:

- | | |
|---|---|
| <ul style="list-style-type: none"> • Nominal Voltage: 12V • Terminal type: Front • Grid alloy: Lead-Calcium-Tin alloy • Plates: Flat Pasted • Separators: AGM • Active material: Very high purity lead • Case and cover: FR ABS class V0 • Carrying Handles: Yes • Terminal torque: 8 Nm | <ul style="list-style-type: none"> • Electrolyte: Sulphuric acid, Analytical grade purity • Venting Valve: One way, self resealing, <ul style="list-style-type: none"> - Opening pressure 120 mBar - Resealing pressure 105 mBar • Central degassing system: Available • Terminal sealing: Mechanical + epoxy double sealing • Connectors: Supplied as standard • Shelf life: Up to 1 year |
|---|---|

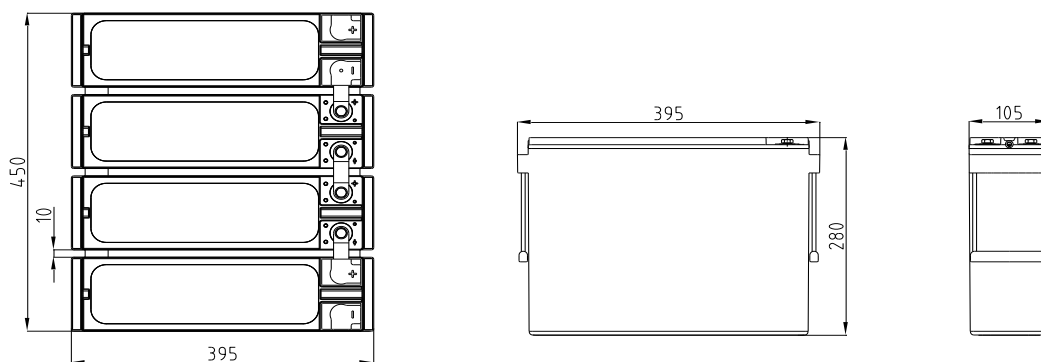

Mechanical Characteristics

	SI Units	US Units
Length	395 mm	15.55 inches
Width	105 mm	4.13 inches
Height	280 mm	11.02 inches
Typical Weight	27.5 kg	60.63 lbs
Terminal Torque	8.0 Nm	70.8 in.lbs

Performance characteristics:

- Charging voltage: Float 2.27 – 2.29 Vpc at (20-25°C)
Boost charge 2.40 Vpc at 20°C
- Temperature compensation: -3mV/°C
- Short Circuit Current: 1910 A (IEC 60 896 -21/22)
- Internal resistance: 6.51 mOhms (IEC 60 896 -21/22)
- Recommended End of Discharge voltage:
 - From 5 min to 1 hour: 1.65 Vpc
 - From 1 to 5 hours: 1.70 Vpc
 - From 5 to 8 hours: 1.75 Vpc
 - From 8 to 20 hours: 1.80 Vpc
- Self discharge: Less than 2.5% per month at 20°C
- Storability without recharging: Up to 6 months at 20°C

Performance and characteristics at different temperatures (capacity correction)

Discharge time	0 °C	5 °C	10 °C	15 °C	20 °C	25 °C	30 °C	35 °C	40 °C
From 5 to 59 minutes	0.77	0.83	0.87	0.92	0.96	1	1.02	1.05	1.06
From 1 to 24 hours	0.83	0.87	0.91	0.94	0.97	1	1.02	1.03	1.04

Battery capacity at constant current discharge (Ah) for battery 12MVR100TA at 25 °C

Uf, Vpc	5 min	15 min	30 min	1 h	2 h	3 h	4 h	5 h	6 h	8 h	10 h	20 h
1.60	22.5	40.5	50.6	60.6	72.2	78.0	82.6	85.7	88.5	93.2	94.9	98.5
1.65	21.6	39.3	49.7	58.9	70.8	76.6	81.4	84.8	87.9	92.5	94.1	97.7
1.70	20.0	37.7	47.8	57.5	69.5	75.0	80.4	83.5	86.8	91.7	93.5	96.8
1.75	17.8	35.6	45.1	56.1	67.8	74.2	78.8	82.0	85.6	90.9	93.0	95.9
1.80	15.4	33.1	41.4	54.3	66.2	72.7	77.7	81.0	84.2	89.7	92.0	95.0
1.85	13.6	29.2	39.0	52.4	65.4	71.6	76.5	79.7	82.8	88.3	90.9	94.3

Discharge performance at constant current discharge (A) for battery 12MVR100TA at 25 °C

Uf, Vpc	5 min	15 min	30 min	1 h	2 h	3 h	4 h	5 h	6 h	8 h	10 h	20 h
1.60	270.3	161.9	101.2	60.6	36.1	26.0	20.7	17.1	14.8	11.7	9.5	4.9
1.65	259.5	157.1	99.4	58.9	35.4	25.5	20.4	17.0	14.6	11.6	9.4	4.9
1.70	240.4	150.9	95.7	57.5	34.7	25.0	20.1	16.7	14.5	11.5	9.3	4.8
1.75	213.7	142.4	90.2	56.1	33.9	24.7	19.7	16.4	14.3	11.4	9.3	4.8
1.80	184.6	132.5	82.5	54.3	33.1	24.2	19.4	16.2	14.0	11.2	9.2	4.8
1.85	162.6	116.7	78.0	52.4	32.7	23.9	19.1	15.9	13.8	11.0	9.1	4.7

Discharge performance at constant power discharge (W per cell) for battery 12MVR100TA at 25 °C

Uf, Vpc	5 min	15 min	30 min	1 h	2 h	3 h	4 h	5 h	6 h	8 h	10 h	20 h
1.60	473.8	450.7	191.7	116.8	70.8	51.4	41.1	34.1	29.6	23.5	19.1	9.9
1.65	453.1	290.6	188.0	113.3	69.3	50.3	40.5	33.9	29.2	23.3	18.9	9.9
1.70	416.7	278.0	180.4	110.3	67.8	49.4	39.8	33.2	28.9	23.1	18.7	9.7
1.75	366.3	260.9	169.0	107.4	66.1	48.6	39.0	32.6	28.5	22.9	18.7	9.7
1.80	312.0	241.1	153.9	103.6	64.4	47.5	38.3	32.1	27.9	22.4	18.5	9.7
1.85	271.6	209.8	144.2	99.6	63.5	46.8	37.7	31.5	27.4	22.0	18.2	9.5