


PB BP 23 3100

START BOOSTER




LED CHARGE INDICATOR

The test button allows users to easily check the charge level of the booster and test the alternator of a vehicle.




ULTRA HIGH GRADE CABLES

Full copper woven cables are extremely durable and allow for very limited losses providing the highest starting power.



P27 CHARGING STATION

Easy to use charging station keeps the booster ready for action. Can also be used to charge external batteries

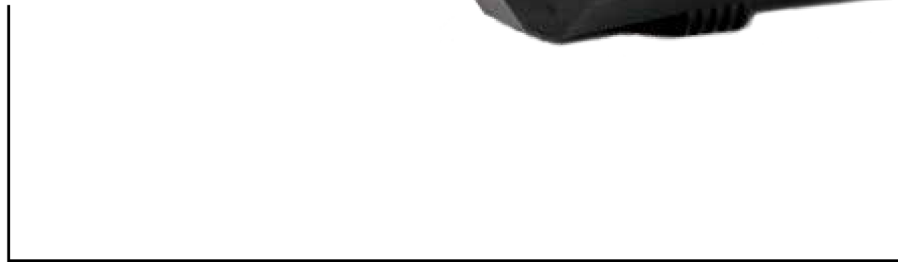

Your supplier



The right battery

GACELL A/S · Sletten 17 · 7500 Holstebro · DK
+45 961 02 961 · www.gacell-power.dk



Model	Volts	Peak Amps (A)	Starting Amps (A)	# Of Batteries	Location of Fuse	Fuse (A)	Dimensions (cm)	Cable Diameter (mm²)	Cable Length (cm)	Unit Weight (KG)	Charger Voltage (V)	Charger Amps (A)	Vehicle Types
P23-3100	12V	3100A	1170A	1	Clamp	500	33x15x31	25	84	10	230	2	
P27-Charger	12V	NA	NA	0	NA	NA	40x18x31	NA	NA	4	230	3.8	