

MODEL	TRL-GC2-36-M
VOLTAGE	38.4V
NOMINAL CAPACITY	45Ah (1,751Wh)
CASE	Maroon Colored ABS/FR
BATTERY	Deep-Cycle Lithium Iron Phosphate
CYCLE LIFE	>4000 cycles @70% DoD (to 70% of initial capacity) at 25°C*
INTELLIGENCE	Internal battery disconnect, redundant protections using three levels of fusing, state of charge indicator with aging compensation, CAN-Bus communication



PHYSICAL SPECIFICATIONS

BCI	MODEL	TERMINAL TYPE ¹	TERMINAL TORQUE IN-LBS (NM)	DIMENSIONS INCHES (MM)			WEIGHT ² LBS. (KG)	HANDLES	INSTALLATION ORIENTATION
GC2	TRL- GC2-36-M	M8-1.25 x 15mm Stud	80-90 (9-10)	LENGTH	WIDTH	HEIGHT	37 (16.8)	Removable	Vertical
				10.4 (264)	7.1 (180)	10.9 (278)			


ELECTRICAL SPECIFICATIONS

VOLTAGE	CAPACITY AMP-HR (AH) @ 77°F (25°C)			ENERGY (WH)
38.4V	5-Hr (9A)	10-Hr (4.5A)	20-Hr (2.25A)	20-Hr
	45	45	45	1,751

OPERATIONAL SPECIFICATIONS

OPERATING TEMPERATURE RANGE	STORAGE TEMPERATURE RANGE
-4°F to 113°F (-20°C to 45°C)	-40°F to 140°F (-40°C to 60°C)

CHARGER INSTRUCTIONS

CHARGER SETTINGS (USING LITHIUM-ION CHARGER)			
Lithium-ion Charger Compatibility Guide			
Recommended Charging Voltage		41.0V to 42.0V	
Maximum Charging Current @ Temperature			
< 32°F (< 0°C)		0A	
32°F to 50°F (0°C to 10°C)		13A	
50°F to 68°F (10°C to 20°C)		23A	
68°F to 113°F (20°C to 45°C)		45A	
> 113°F (> 45°C)		0A	

SAFETY/AGENCY INFORMATION

CERTIFIED TO THE FOLLOWING		
UN/DoT 38.3	Cells: IEC 62133-2, UL 1642, UN38.3	FCC Part 15
ROHS Compliant	UL 2271, UL 1998, UL 991 (Pending)	CE

OTHER SPECIFICATIONS

PERFORMANCE AND SYSTEM SPECIFICATIONS @ 77°F (25°C)	
Maximum Continuous Discharge Current	60A
Maximum Pulse Discharge Current (30 sec)	100A
Maximum Instantaneous Discharge Current (0.4 sec)	160A
Reserve Capacity @ 25A	108 Min
Battery Internal Protection	Short Circuit Current Temperature Over Voltage Under Voltage Over-current
Battery Functions	Cell Balancing State of Charge CAN-Bus Communication
Safety Systems	Fuse, hardware, BMS
Discharge Voltage Cutoff	30.36V
Environmental Protection	IP67
Shipping Classification	UN3480, Class 9
Case Flame Rating	UL94 V-0



Do not mix with lead-acid batteries when recycling

*At C/2 rate and depending on application/user conditions


Your supplier

GACELL
 The right battery


GACELL A/S · Sletten 17 · 7500 Holstebro · DK
 +45 961 02 961 · www.gacell-power.dk

CYCLE LIFE

To 70% INITIAL CAPACITY

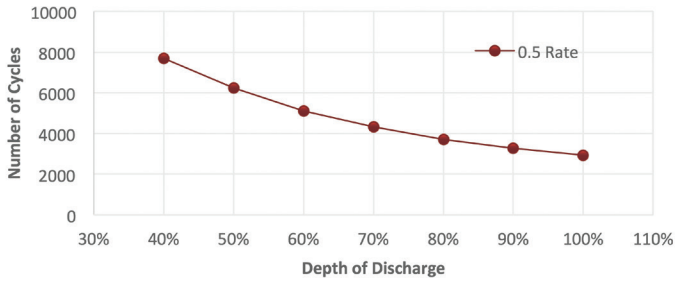

DISCHARGE PROFILE

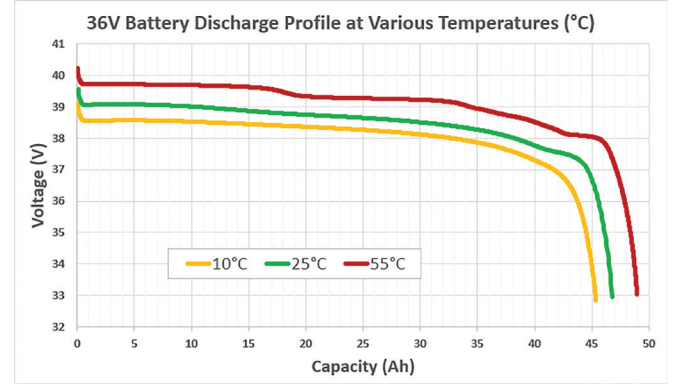

STATUS INDICATOR GUIDE


LED COLOR INDICATION	BATTERY CONDITION	INDICATOR VISUAL
4 Blue LEDs	76% to 100% Capacity Remaining	
3 Blue LEDs	51% to 75% Capacity Remaining	
2 Blue LEDs	26% to 50% Capacity Remaining	
1 Blue LED	0% to 25% Capacity Remaining	
Red LED	Active Alarm / Fault Condition in the Battery	
Green LED	Normal Operation	

The Trojan® GC2 36V Lithium-Ion features include a battery status push button and indicator light on the top of the case. A momentary press of the button displays the battery's State of Charge and operating status.

NOTE: Consult Trojan® GC2 Series Lithium-Ion Batteries User's Guide for more information at trojanbattery.com.

BATTERY DIMENSIONS

Dimensions: inches (mm)

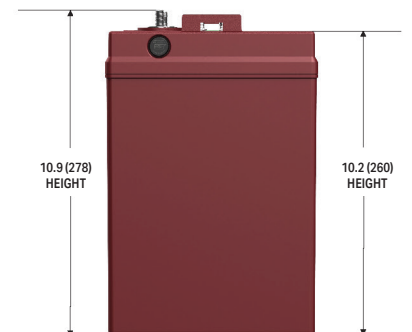

TECHNICAL SUPPORT

Call Trojan Battery Technical Support:

United States and Canada: 800-423-6569, dial ext. 3045

International: +1-562-236-3045

Email: technical@trojanbattery.com

On the web: trojanbattery.com/resources/technical-support

UN38.3 PASSED
TRANSPORTATION
SAFETY
CERTIFIED



TROJAN BATTERY
COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV
= ISO 9001:2015 =

A. Terminal images are representative only
B. Weight may vary

