



HF2-UI-PFC

Main features:

Fan less design

IP66

External charging indicator

Power from 360W up to 720W

Current from 15A to 25A

Available in 24V, 36V or 48V

Din forhandler




GACELL®

The right battery

GACELL A/S - Sletten 17 - DK 7500 Holstebro - 961 02 961

APPLICATIONS



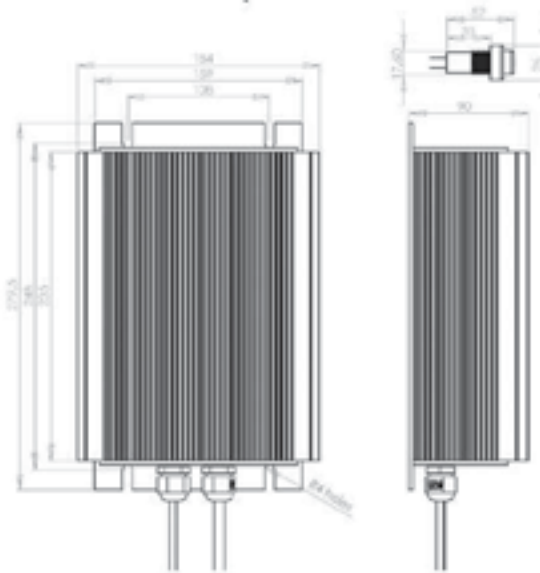

DIMENSIONS (LxWxH): 279,50x184x90 mm – 11x7.24x3.54 in

WEIGHT: 4,50 Kg - 9.92 lbs

PROTECTION GRADE IP66

INPUT VOLTAGE: Universal 100 ÷ 240 Vac – 50-60 Hz

Battery Voltage	Battery Range		Charging Current	Model
	5h	20h		
24	175 ÷ 270 Ah	210 ÷ 315 Ah	25A	24-25
	100 ÷ 150 Ah	130 ÷ 180 Ah	15A	36-15
36	120 ÷ 195 Ah	150 ÷ 235 Ah	20A	36-20
	85 ÷ 135 Ah	105 ÷ 165 Ah	12A	48-12
48	100 ÷ 150 Ah	130 ÷ 180 Ah	15A	48-15
	110 ÷ 180 Ah	140 ÷ 220 Ah	17A	48-17

Din forhandler



GACELL A/S - Sletten 17 - DK 7500 Holstebro - 961 02 961