

Specifications

Nominal Voltage		12 V
Capacity (25°C)	20HR(10.5V)	18Ah
	10HR(10.5V)	16.7Ah
	1HR(9.60V)	11.7Ah
Dimension	Length	181 ± 2mm (7.13inch)
	Width	77 ± 1mm (3.03inch)
	Height	167 ± 2mm (6.57inch)
	Total Height	167 ± 2mm (6.57inch)
Approx. Weight		5.5kg (12.1 lbs) ± 5%
Terminal type		T3/T8
Internal resistance (Fully charged, 25°C)		Approx. 16m Ω
Capacity affected by temperature (20HR)	40°C	102%
	25°C	100%
	0°C	85%
	-15°C	65%
Self-discharge (25°C)	3 month	Remaining Capacity: 91%
	6 month	Remaining Capacity: 82%
	12 month	Remaining Capacity: 65%
Nominal operating temperature		25°C ± 3°C (77°F ± 5°F)
Operating temperature range	Discharge	-15°C ~ 50°C (5°F ~ 122°F)
	Charge	-10°C ~ 50°C (14°F ~ 122°F)
	Storage	-20°C ~ 50°C (-4°F ~ 122°F)
Float charging voltage(25°C)		13.60 to 13.80V Temperature compensation: -18mV/°C
Cyclic charging voltage(25°C)		14.50 to 14.90V Temperature compensation: -30mV/°C
Maximum charging current		5.4A
Terminal material		Copper
Maximum discharge current		270A(5 sec.)
Designed floating life(20°C)		10years

- ◆ Absorbent glass mat technology;
- ◆ Recognized by UL/ CE& VDS;
- ◆ ABS container.



Constant Current Discharge Characteristics (A, 25°C)

F.V/TIME	10min	15min	30min	60min	90min	2h	3h	4h	5h	8h	10h	20h
9.60V	43.2	34.2	19.1	11.7	8.59	6.39	4.59	3.67	3.12	2.02	1.70	0.91
9.90V	41.9	33.4	18.7	11.5	8.48	6.36	4.56	3.65	3.10	2.01	1.69	0.91
10.2V	40.2	32.1	18.1	11.2	8.31	6.30	4.53	3.63	3.08	1.99	1.68	0.91
10.5V	38.4	31.1	17.7	11.0	8.17	6.21	4.50	3.60	3.06	1.98	1.67	0.90
10.8V	36.3	29.4	17.0	10.7	7.96	6.05	4.37	3.49	2.97	1.92	1.64	0.88

Constant Power Discharge Characteristics (Watt, 25°C)

F.V/TIME	10min	15min	30min	60min	90min	2h	3h	4h	5h	8h	10h	20h
9.60V	487	390	219	135	99.7	74.8	54.5	43.7	37.3	24.2	20.4	11.0
9.90V	473	381	214	133	98.5	74.4	54.2	43.5	37.0	24.1	20.3	10.9
10.2V	453	366	208	130	96.8	73.7	53.8	43.2	36.8	23.9	20.2	10.9
10.5V	434	354	203	127	94.8	72.6	53.5	42.9	36.5	23.8	20.1	10.8
10.8V	409	335	195	124	92.5	70.8	51.9	41.6	35.4	23.0	19.7	10.6


Note: The above characteristics data can be obtained within three charge/discharge cycles.

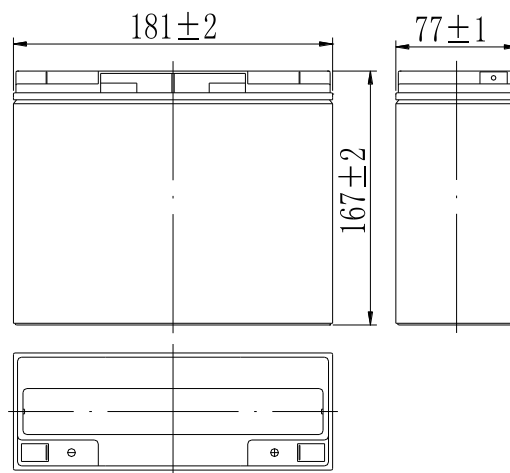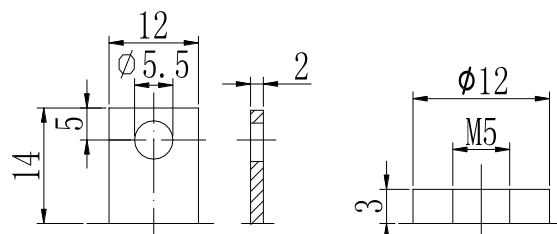**Dimensions****Terminal**


Terminal T3

Terminal T8


Discharge Characteristics(25°C)

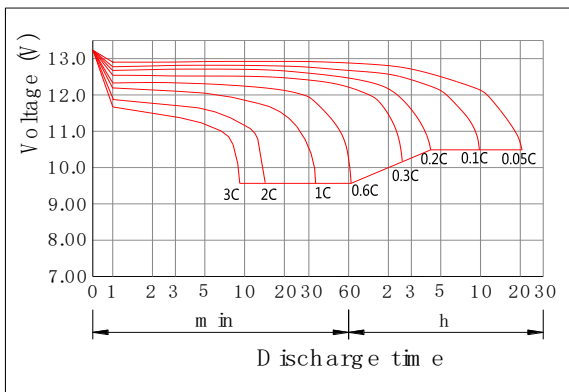


Charging Characteristics(25°C)

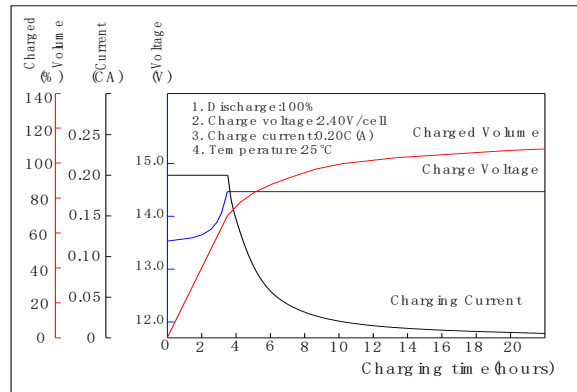


Effect of Temperature on Capacity

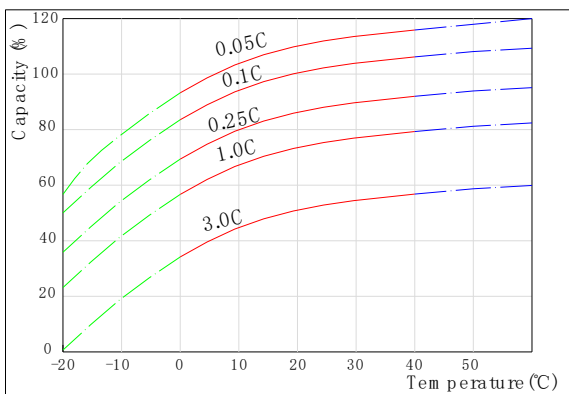


Self-discharge Characteristics

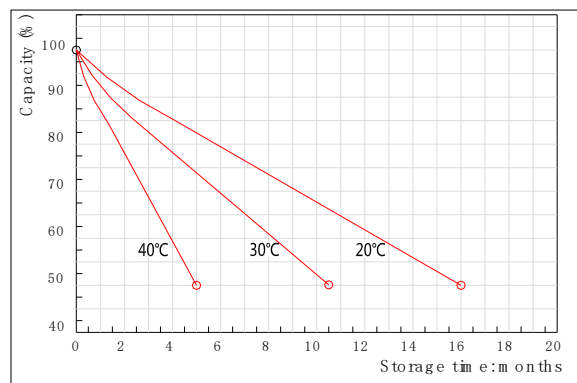


The Relationship for Open Circuit Voltage and Residual Capacity (25°C)

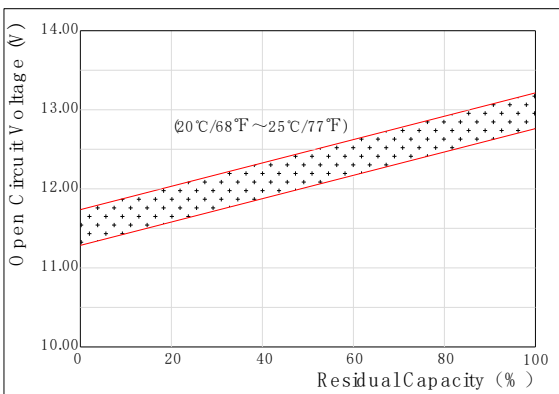

The Relationship for Charging Voltage and Temperature

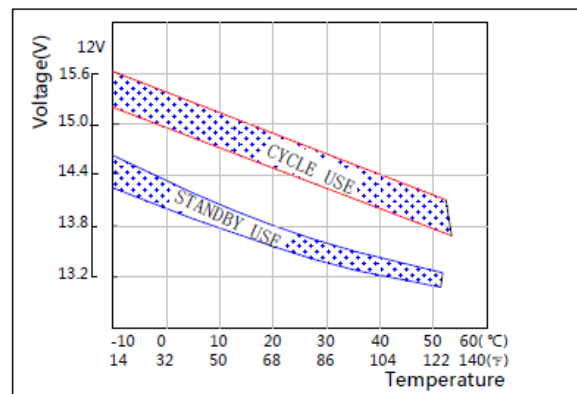

Floating Life on Temperature

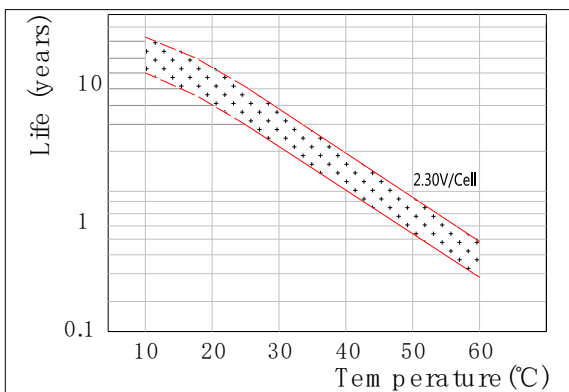

Cycle Life on D.O.D.(25°C)

