


# Power on Demand



The advanced design of the Armasafe Plus delivers outstanding performance. The battery's specially formulated alloy gives an impressive 2 year shelf-life when stored under normal conditions\*, far exceeding standard battery storage times.

## ARMASAFE PLUS A POWERFUL PERFORMER

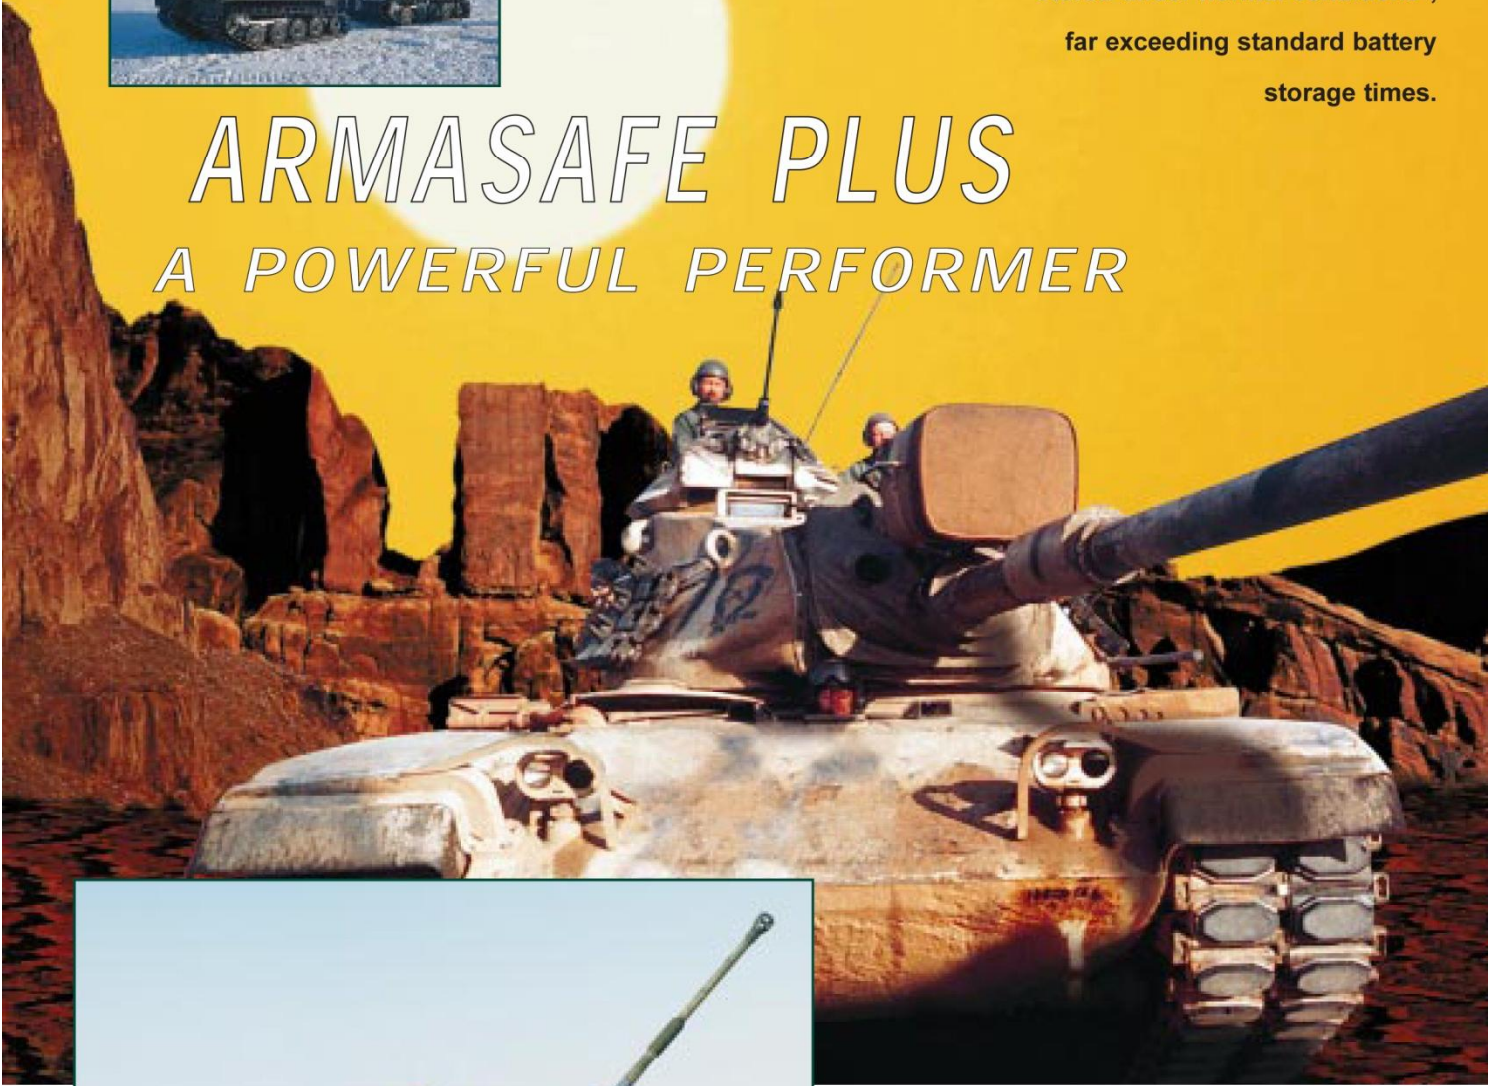


Additionally, the high CCA rating of 1225 Amps leads to improved engine starting capacity, putting Armasafe Plus in a different class.

The unit also incorporates a dramatically improved charge-acceptance capability. This built-in 'deep discharge \*(at an average temperature 25°C)

resistance' allows the battery to be fully recharged, even following a prolonged period of disuse.

- Extended life
- Superior starting capacity
- Deep discharge resistance



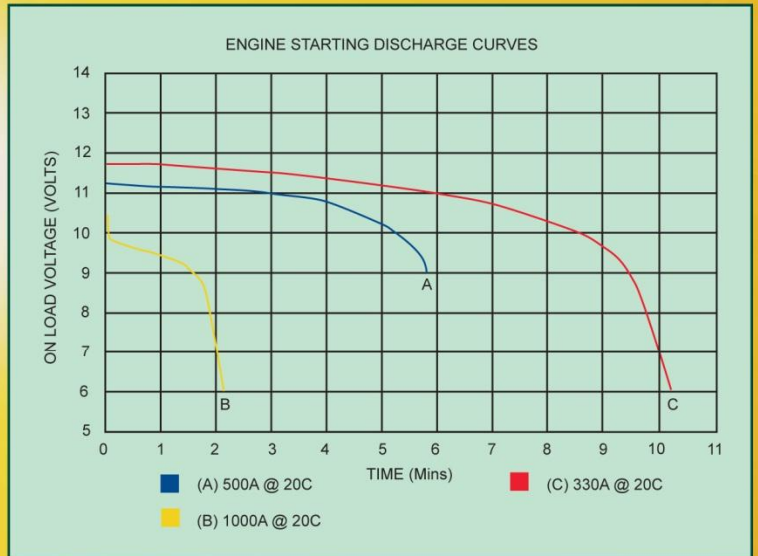

### TECHNICAL DATA

Nominal Voltage:	12 volts
Charging Voltage:	14.25 ± 0.25v (20°C)
Nominal Capacity:	120Ah (20 hour) 110Ah (10 hour) 100Ah (5 hour) 80Ah (1 hour)
Operating Temperature:	Continuous -30°C to +40°C Intermittent -40°C to +55°C
Storage Temperature:	-40°C to +55°C
Weight:	40Kg
CCA (S.A.E.):	1225 Amps

