



UK6G40

Maintenance-free
AGM TPPL
Rechargeable VRLA
battery for military
applications



THE HAWKER ARMASAFE PLUS BATTERY KEEPS YOUR ARMY ON THE MOVE

ARMASAFE *plus*

The **ARMASAFE Plus** series utilises the proven EnerSys® Thin Plate Pure Lead valve regulated technology, to meet the diverse and demanding energy storage needs of the modern world. Today over 2 million batteries have been installed on a wide range of combat and tactical vehicles throughout the world.

EnerSys TPPL technology packs more power into the same space as a conventional battery, as well as reducing the corrosion and water losses through the purity of the materials used in construction, providing extended storage and service life as well as increasing the resistance to abusive deep discharges.



The inherent design of the VRLA Armasafe battery minimises gas evolution and eliminates the need to top up periodically with water. The electrolyte is fully absorbed into the glass mat separators between the positive and negative plates, which mean there is no free acid within the battery case; this gives increased flexibility in mounting position.



UK6G40

Part number: 9750N7020
NSN:6140-99-665-3648



SPECIFICATIONS:

Technical Data:

Technology	*TPPL / *AGM / *VRLA
Nominal Voltage	12 V
Charging Voltage	14.4 V @ 20 °C
Float Voltage	13.74 V @ 20 °C
Nominal Capacity C ₂₀	42 Ah
Reserve Capacity	TBA
**CCA	570A
Internal Resistance	1.6 mΩ
Temperature Performance Range	-40°C to +80°C
Cycle life at 20% of DoD	3500 Cycles
Cycle life at 50% of DoD	1650 Cycles
Cycle life at 80% of DoD	680 Cycles
Weight	17.5 kg
Storage	60 Months
Storage at 25°C without recharge	30 Months
Terminals	EN60095-2

*TPPL: Thin Plate Pure Lead

*AGM: Absorbed Glass Mat

*VRLA: Valve Regulated Lead Acid


** According DEF. STAN. 61-21 Supp. 023

Features & Benefits:

Fully compliant with UK MoD specification Defence Standard 61-21 Supplement 023.

- Installation orientation: can be mounted in any orientation except inverted
- Recombination efficiency 99%
- UN Transportation classification UN2800-Class 8 exempt
- 97% Recyclability
- Flame retardancy V0
- Shock resistant
- Maintenance-free
- Long shelf life
- Resistant to abusive discharges
- Superior cold cranking performance
- Excellent cyclic capability
- Superb charge acceptance

Dimensions:

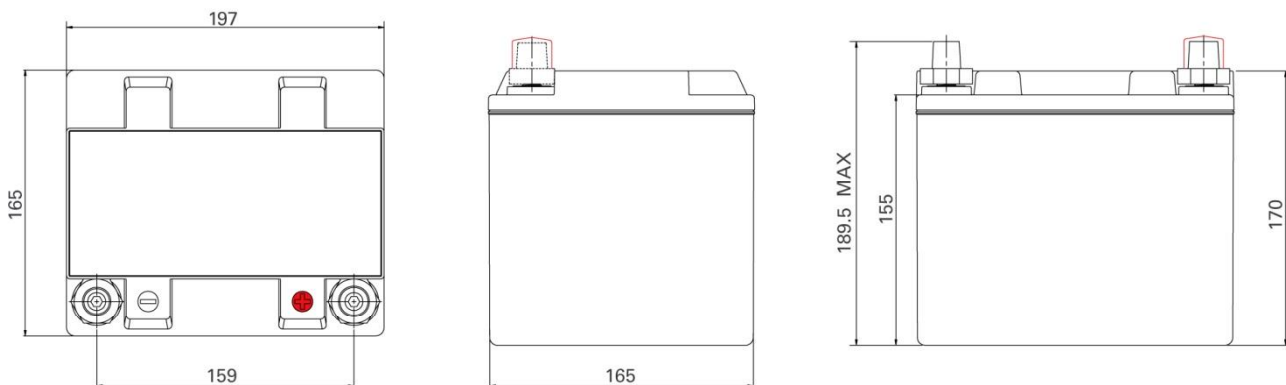

Energys_ArmaSafe_Plus_UK6G40_Jan-2012_V01_EN