


Data Sheet

Type Number	6117	
Designation IEC	---	
System	Li-Manganese dioxide / Organic Electrolyte	
UL Recognition:	MH 13654 (N)	
Nominal Voltage	3 V	
Typical Capacity C	2000 mAh	
Load 1.0 kOhm, at 20°C down to 2 V		
Weight (approx.)	21,5 g	
Volume	8,5 ccm	
Coding	Date of Manufacturing Quarter/Year	
Temperature Ranges		
Storage	min	max.
	-55°C	75 °C
Discharge	-30°C	75°C
Dimensions		
	min	max.
Diameter (A)	14,45	14,75
Height (B)	49,5	50,5
Shoulder Diameter[E].....	7	
Shoulder Height [C].....	0,6	
Segment	Electronic	
Main Applications	Electronic	

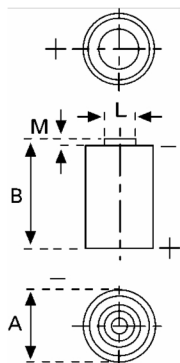

Typical Capacities (at 20°C)

Discharge Type	Load	End Voltage:	2.0 V
Continuous 24h/d, 7d/w Current [μA]:	1000 Ω	Time:	745 h
		Capacity [mAh]:	2000
		Energy [mWh]:	5600
Discharge Type	Load	End Voltage:	2.0 V
Continuous 24h/d, 7d/w Current [μA]:	620 Ω	Time:	430 h
		Capacity [mAh]:	1850
		Energy [mWh]:	5000