




GACELL A/S · Sletten 17 · 7500 Holstebro · DK
+45 961 02 961 · www.gacell-power.dk

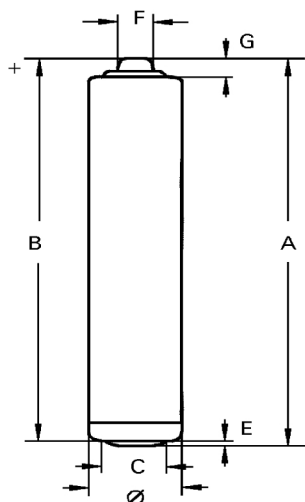

Type Designation	6106
System	Lithium / Iron Disulfide (Li/FeS ₂)
Shelf Life (Coding)*	10 years
Nominal Voltage [V]	1.5
Typical Capacity C [mAh]	2900
Permissible Temperature Range	- 40 °C ... 60 °C
Weight, approx. [g]	15

Dimensions [mm] min: max:

∅	13.5	14.5
A	-	50.5
B	49.5	-
E	-	0.5
F	-	5.5
G	1.0	-

Typical Capacities (at 20°C):



Discharge Type	Load	End Voltage[V]	1.05
2S/28S, 5M/H Digital Still Camera	1500 mW/650mW	Pulse [n]	485
Discharge Type	Load	End Voltage[V]	0.9
10S/M, 1H/D, 7D/W Photo Flash	1000 mA	Pulse [n]	876
Discharge Type	Load	End Voltage[V]	0.9
1H/D, 7D/W CD / MD / Electronic game	250 mA	Time [h]	9,95

No publication or circulation of data to third parties without consent of VARTA Consumer Batteries

* In consideration of typical loss of capacity at storage and application.