

MONBAT Premium SMF A167B2X0_1 63 Ah

According to EN 50342


Premium

SEALED MAINTENANCE FREE


Electrical specification

Voltage:	12V
Capacity C²⁰:	63 Ah
Cold cranking current:	600 A [EN]
Cold cranking current:	360 A [DIN]

Mechanical specification

Dimensional group:	LB2
ETN reference:	563 078 060 SMF
DIN reference:	56378
Dimensions^A in mm (LxWxH):	242x175x175
Cell Layout:	0
Terminal Type:	1

Container

Case	Material	Polypropylene
	Bottom hold-down	B14
	Colour	Grey

Lid	Material	Polypropylene
	Cover design	SMF
	Colour	Grey

Vent caps	Material	Polypropylene
	Type	SMF
	Colour	Grey

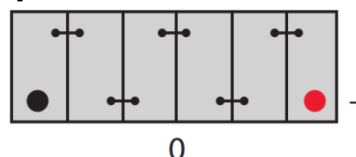
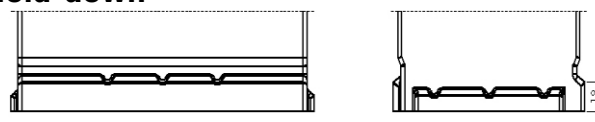
Handles	Material	Polypropylene
	Position	Top - on lid
	Colour	Grey

Battery classification as per EN 50342-6

Water consumption	Charge retention	Vibration resistance	Endurance Level
W4	C2	V2	E2

Weight^B

Battery weight in kg:	11.80
Acid weight in kg:	4.20
Total battery weight in kg:	16.00

Layout

Hold-down

Separator

Type	PE
-------------	-----------

^{A.} Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.

^{B.} Weight may vary ±5%.