

MONBAT Premium ASIA NP77J7X0_1 75 Ah

According to EN 50342 / JIS D 5301



Premium

SEALED MAINTENANCE FREE



Your supplier
GACELL®
The right battery

GACELL A/S · Sletten 17 · 7500 Holstebro · DK
+45 961 02 961 · www.gacell-power.dk

Electrical specification

Voltage:	12V
Capacity C²⁰:	75 Ah
Cold cranking current:	700 A [EN]
Cold cranking current:	415 A [DIN]

Mechanical specification

Dimensional group:	D26
ETN reference:	575 027 070 SMF
DIN reference:	-
Dimensions^A in mm (LxWxH):	260x170x220
Cell Layout:	0
Terminal Type:	1

Container

Case	Material	Polypropylene
	Bottom hold-down	B1
	Colour	Grey

Lid	Material	Polypropylene
	Cover design	SMF
	Colour	Grey

Vent caps	Material	Polypropylene
	Type	SMF
	Colour	Grey

Handles	Material	Polypropylene
	Position	Top - on lid
	Colour	Grey


Battery classification as per EN 50342-6

Water consumption	Charge retention	Vibration resistance	Endurance Level
W4	C2	V2	E2

Weight^B

Battery weight in kg:	12.70
Acid weight in kg:	5.40
Total battery weight in kg:	18.10

Layout

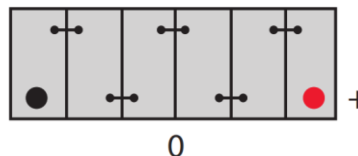

Hold-down



Separator

Type	PE
-------------	-----------

^{A.} Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.

^{B.} Weight may vary ±5%.