

MONBAT HD EC78M1K0_1 125 Ah

According to EN 50342



HD series
HEAVY-DUTY VEHICLES



Your supplier
GACELL[®]
The right battery
GACELL A/S · Sletten 17 · 7500 Holstebro · DK
+45 961 02 961 · www.gacell-power.dk

Electrical specification

Voltage:	12V
Capacity C²⁰:	125 Ah
Cold cranking current:	800 A [EN]
Cold cranking current:	490 A [DIN]

Mechanical specification

Dimensional group:	MAC110
ETN reference:	625 087 080
DIN reference:	62587
Dimensions^A in mm (LxWxH):	514x175x210
Cell Layout:	3
Terminal Type:	1

Container

Case	Material	Polypropylene
	Bottom hold-down	B3
	Colour	Black

Lid	Material	Polypropylene
	Cover design	Kamina
	Colour	Black

Vent caps	Material	Polypropylene
	Type	Kamina
	Colour	Black

Handles	Material	Polypropylene
	Position	Sides - on container
	Colour	Black


Battery classification as per EN 50342-6

Water consumption	Charge retention	Vibration resistance	Endurance Level
W3	C2	V2	E1

Weight^B

Battery weight in kg:	19.80
Acid weight in kg:	10.85
Total battery weight in kg:	30.65

Layout

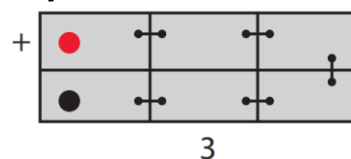

Hold-down



Separator

Type	PE
-------------	-----------

A. Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
B. Weight may vary ±5%.