



AGM DEEP CYCLE

SEALED MAINTENANCE FREE

PHYSICAL CHARACTERISTICS		
	SI Units	US Units
Length	518 mm	20,2 inch
Width	274 mm	10,7 inch
Height ^A	242 mm	9,5 inch
Typical weight ^B	56,20 kg	123,90 lbs

AGM 195C-180 Ah (C₂₀)



Your supplier
GACELL
The right battery

GACELL A/S · Sletten 17 · 7500 Holstebro · DK
+45 961 02 961 · www.gacell-power.dk

Specifications:

- Nominal voltage: 12 V
- Rated capacity: 180 Ah (at C₂₀ and 25 °C)
- Plate technology: Calcium - Calcium
- Separator: AGM
- Electrolyte: Sulphuric acid; analytical grade
- Standards: IEC 61056; IEC 61427; IEC 60896
- Case / Lid material: Polypropylene
- Lid type: Kamina
- Terminal type: Conical
- Carrying Handles: Available
- Cycles at 50% DoD: up to 500 cycles
- PVES applications: up to 1000 cycles

Performance characteristics:



BATTERY DISCHARGE PERFORMANCE AT 25°C					
Discharge rate	C ₅ (5 h)	C ₁₀ (10 h)	C ₂₀ (20 h)	C ₁₀₀ (100 h)	Capacity at 25 A
End of discharge voltage	10.20 V	10.80 V	10.50 V	10.80 V	10.50 V
Discharge capacity	145 Ah	165 Ah	180 Ah	195 Ah	350 min

Temperature correction factor of discharge C₅ (5 h) capacity

Temperature	-20 °C	-10 °C	0 °C	10 °C	20 °C	40 °C
Correction factor	0.50	0.70	0.83	0.91	0.97	1.04

BATTERY CHARGE CONDITIONS

Charging profiles: WaW0 and IU1a Charge factor: 1.10 – 1.20

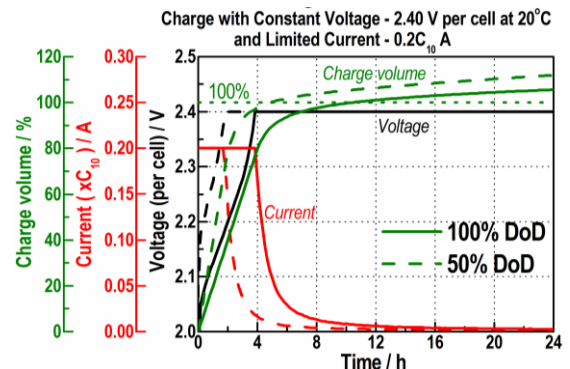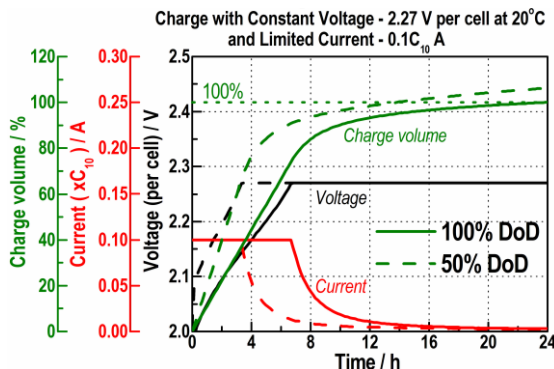

- A. Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
- B. Weight may vary ±5%.