

MONBAT Formula A78L3P0_1 75 Ah

According to EN 50342



Formula

SEALED MAINTENANCE FREE



Your supplier
GACELL
The right battery

GACELL A/S · Sletten 17 · 7500 Holstebro · DK
+45 961 02 961 · www.gacell-power.dk

Electrical specification

Voltage:	12V
Capacity C ²⁰ :	75 Ah
Cold cranking current:	680 A [EN]
Cold cranking current:	420 A [DIN]

Mechanical specification

Dimensional group:	L3
ETN reference:	575 012 068 SMF
DIN reference:	57512
Dimensions ^A in mm (LxWxH)	278x175x190
Cell Layout:	0
Terminal Type:	1

Container

Case	Material	Polypropylene
	Bottom hold-down	B13
	Colour	Black

Lid	Material	Polypropylene
	Cover design	SMF
	Colour	Black

Vent caps	Material	Polypropylene
	Type	SMF
	Colour	Black

Handles	Material	Polypropylene
	Position	Top - on lid
	Colour	Black


Battery classification as per EN 50342-6

Water consumption	Charge retention	Vibration resistance	Endurance Level
W4	C2	V1	E1



Weight^B

Battery weight in kg:	11.60
Acid weight in kg:	6.00
Total battery weight in kg:	17.60

Layout

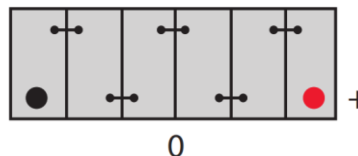

Hold-down



Separator

Type	PE
------	----

A. Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.

B. Weight may vary ±5%.