

MONBAT Formula A90B5P0_1 100 Ah

According to EN 50342


Formula

SEALED MAINTENANCE FREE


Your supplier
GACELL®
The right battery

GACELL A/S · Sletten 17 · 7500 Holstebro · DK
+45 961 02 961 · www.gacell-power.dk

Electrical specification

Voltage:	12V
Capacity C ²⁰ :	100 Ah
Cold cranking current:	840 A [EN]
Cold cranking current:	500 A [DIN]

Mechanical specification

Dimensional group:	LB5
ETN reference:	600 130 084 SMF
DIN reference:	60030
Dimensions ^A in mm (LxWxH)	353x175x175
Cell Layout:	0
Terminal Type:	1

Container

Case	Material	Polypropylene
	Bottom hold-down	B4
	Colour	Black

Lid	Material	Polypropylene
	Cover design	SMF
	Colour	Black

Vent caps	Material	Polypropylene
	Type	SMF
	Colour	Black

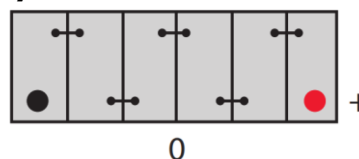


Handles	Material	Polypropylene
	Position	Top - on lid
	Colour	Black

Battery classification as per EN 50342-6

Water consumption	Charge retention	Vibration resistance	Endurance Level
W4	C2	V1	E1

Weight^B

Battery weight in kg:	14.60
Acid weight in kg:	7.10
Total battery weight in kg:	21.70

Layout

Hold-down

Separator

Type	PE
------	-----------

^{A.} Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.

^{B.} Weight may vary ±5%.