

MONBAT Formula A99L5P0_1 95 Ah

According to EN 50342



Formula

SEALED MAINTENANCE FREE



Your supplier
GACELL[®]
The right battery

GACELL A/S · Sletten 17 · 7500 Holstebro · DK
+45 961 02 961 · www.gacell-power.dk

Electrical specification

Voltage:	12V
Capacity C²⁰:	95 Ah
Cold cranking current:	800 A [EN]
Cold cranking current:	490 A [DIN]

Mechanical specification

Dimensional group:	L5
ETN reference:	595 038 080 SMF
DIN reference:	59538
Dimensions^A in mm (LxWxH)	353x175x190
Cell Layout:	0
Terminal Type:	1

Container

Case	Material	Polypropylene
	Bottom hold-down	B13
	Colour	Black

Lid	Material	Polypropylene
	Cover design	SMF
	Colour	Black

Vent caps	Material	Polypropylene
	Type	SMF
	Colour	Black

Handles	Material	Polypropylene
	Position	Top - on lid
	Colour	Black


Battery classification as per EN 50342-6

Water consumption	Charge retention	Vibration resistance	Endurance Level
W4	C2	V1	E1


Weight^B

Battery weight in kg:	14.10
Acid weight in kg:	7.70
Total battery weight in kg:	21.80

Layout

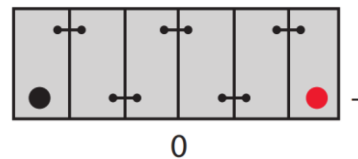

Hold-down



Separator

Type	PE
-------------	-----------

A. Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
B. Weight may vary ±5%.