

HydroFill battery watering cart

Water where you want it, when you want it



Easy to manoeuvre: Handles like a hand truck

Easy to use

Easy to fill: Large opening

ON/OFF switch located on the rear of the unit

Sealed rechargeable battery is included. Charge the unit from any 230V AC outlet with the provided charger

Sturdy 37.8 litre tank

3 meter hose

Providing an adequate supply of water to your battery topping system is often problematic and expensive. The HydroFill is a mobile water carrier with an inbuilt pump and battery, that enables you to transport water to anywhere in your facility. It is designed to be used with Battery Watering Guns or a float based system, making it an ideal addition to your battery room.

The HydroFill's simple, but rugged design makes it easy to use and reliable. Simply fill the cart with a suitable source of deionised water, wheel it to your battery, attach to the filling system and switch on.


As standard the HydroFill is supplied with a quick connect fitting. Adapters are available if other types of fittings are required.

HydroFill battery watering cart

Water where you want it, when you want it.



HydroFill topping Golf Buggy

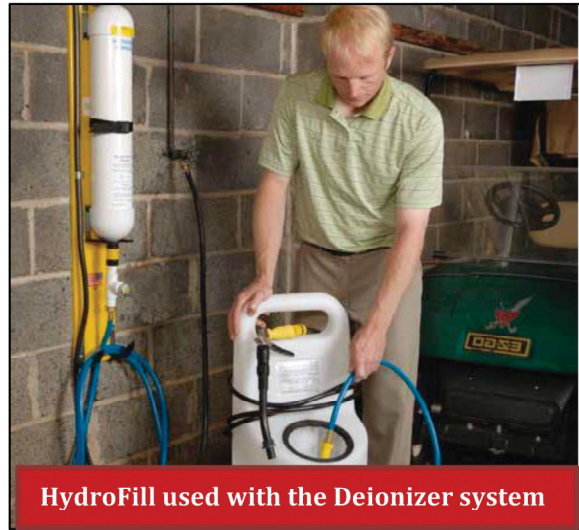

HydroFill used with the Deionizer system

Features

- Large Capacity, Sturdy 37.8 litre tank
- Compact size
- 2 wheel configuration
- Built-in 12 volt sealed rechargeable battery
- Fully automatic battery charger
- Shipped ready to use

Benefits

- Easy to use
- Robust
- Transport water to where you want
- No assembly required

As standard the HydroFill is supplied with a quick connect fitting. Adapters are available if other types of fittings are required.

If used with a floating system we recommend the use of a filling adapter (WCA-FA-ACC003C) (output 0.65 bar)

When combined with the Philadelphia Scientific Water Deionizer System, the HydroFill forms part of the most effective battery maintenance programme available, reducing waste and saving you time and money.

Specifications Electrical

Cart Operating voltage	12V
Current Consumption	7.5A
Nominal Power Consumption	90W
Onboard Power	12V 7Ah Maintenance free battery
Charger Operating Voltage	Europe wide 230V 50HZ 2-pin plug

Specifications General

Capacity	37.8 Litres
Minimum pressure	15 psi (1 bar)
Maximum pressure	25 psi (1.7 bar)
Max flow	7 Litres per min (1.5imp. Gallons per min)
Output hose length	3 Meters

Specifications Controls

Cart ON/OFF	Rocker Switch- pump turns on and off by demand on failing or rising line pressure
-------------	--

WCA-FA-ACC003C

Filling Adapter

