



## CBHD2

Main features:

Reduced weight and dimensions

Power from 180W up to 480W

Current from 15A to 20A

Available with Led on side or Led on top


Din forhandler



**GACCELL A/S - Sletten 17 - DK 7500 Holstebro - 961 02 961**

APPLICATIONS



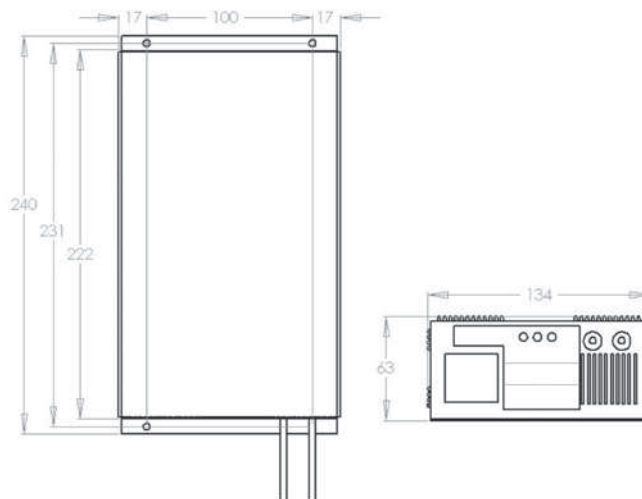

DIMENSIONS (LxWxH): 134x240x63 mm – 5.28x9.45x2.48 in  
 WEIGHT: 2,20 Kg - 4.85 lbs  
 PROTECTION GRADE IP30  
 INPUT VOLTAGE: Universal 100 ÷ 240 Vac – 50-60 Hz

Battery Voltage	Battery Range		Charging Current	Model
	5h	20h		
12V	100 ÷ 150 Ah	130 ÷ 180 Ah	15A	12-15
	120 ÷ 195 Ah	150 ÷ 235 Ah	20A	12-20
24V	100 ÷ 150 Ah	130 ÷ 180 Ah	15A	24-15
	120 ÷ 195 Ah	150 ÷ 235 Ah	20A	24-20

**Din forhandler**



**GACELL A/S - Sletten 17 - DK 7500 Holstebro - 961 02 961**

