



CBHF1-SM

Main features:

Compact & lightweight

Power from 48W up to 290W

Current from 4A to 12A


Din forhandler



GACELL A/S - Sletten 17 - DK 7500 Holstebro - 961 02 961

APPLICATIONS



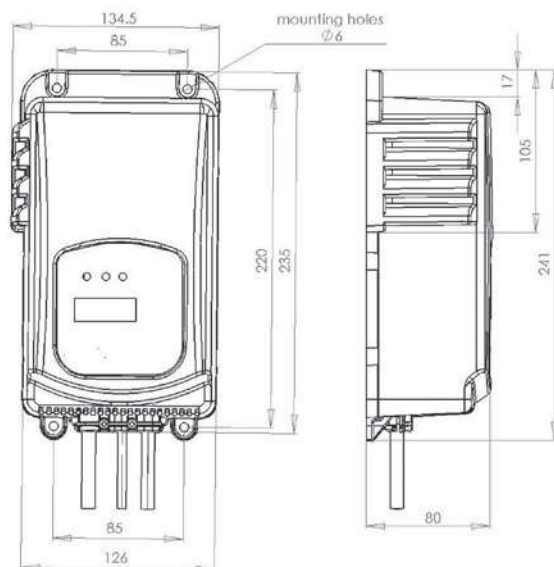

DIMENSIONS (LxWxH): 134,5x241x80 mm – 5.30x9.49x3.15 in
 WEIGHT: 1,80 Kg – 3.97 lbs
 PROTECTION GRADE IP30
 INPUT VOLTAGE: 208 ÷ 240 Vac – 50-60 Hz

Battery Voltage	Battery Range		Charging Current	Model
	5h	20h		
12V	20 ÷ 40 Ah	30 ÷ 50 Ah	4A	12-4
	40 ÷ 80 Ah	60 ÷ 105 Ah	8A	12-8
	60 ÷ 100 Ah	70 ÷ 130 Ah	10A	12-10
	90 ÷ 120 Ah	120 ÷ 160 Ah	12A	12-12
24V	20 ÷ 40 Ah	30 ÷ 50 Ah	4A	24-4
	40 ÷ 80 Ah	60 ÷ 105 Ah	8A	24-8
	60 ÷ 100 Ah	70 ÷ 130 Ah	10A	24-10
	90 ÷ 120 Ah	120 ÷ 160 Ah	12A	24-12

Din forhandler



GACELL A/S - Sletten 17 - DK 7500 Holstebro - 961 02 961

