



GACELL A/S · Sletten 17 · 7500 Holstebro · DK
+45 961 02 961 · www.gacell-power.dk

DEEP CYCLE



LDC12-120

FEATURES&BENEFITS

- True deep cycle AGM-GEL technology-GREEN SOLUTION
- Over 99.99% virgin lead for grid plate
- Carbon active material
- Electrolyte + Gel for longer cycle life
- Heavy duty grid/paste design for deep cycle application
- Maintenance free, non-spillable, valve-regulated
- Double separator configuration :long cycle life &High energy density and super anti-vibration design
- Low self-discharge for longer shelf life



ELECTRICAL SPECIFICATIONS

Voltage (V)	Capacity(Ah)					Reserve Capacity(min)		
	100HR	20HR	10HR	5HR	3HR	25A	56A	75A
12	/	120.0	114.0	106.0	100.0	240	/	68

PHYSICAL SPECIFICATIONS

Dimensions(mm/inches)				Weight (kg/lbs)	Terminal Type (Standard)	Case Material
Length	Width	Height	Total Height			
330/12.99	173/6.81	213/8.39	220/8.66	32.8/73.3	M8	ABS

Operating Temperature Range		
Discharge	Charge	Storage
-15°C~50°C(5°F~122°F)	0C~40°C(32°F-104°F)	-15°C~40°C(5°F~104°F)




IATF16949

ISO14001

ISO9001

LDC12-120


DIMENSIONS

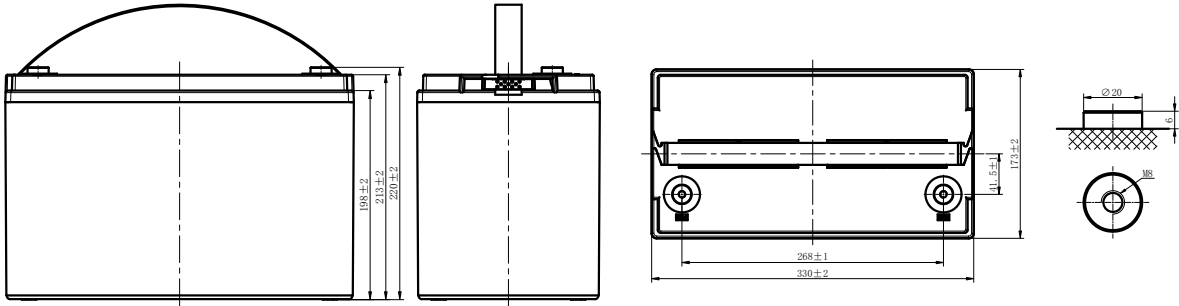


Note: Terminal Torque Values in-lb(Nm):97.28-130.0(11.0-14.7)

PERFORMANCE CHARACTERISTICS


Charging Profile

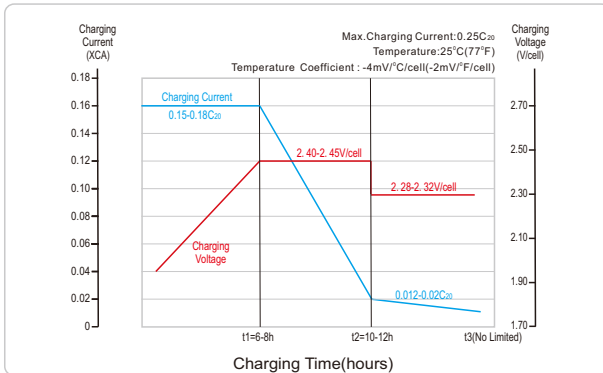


Relationship of OCV and State Of Charge(25°C,77°F)

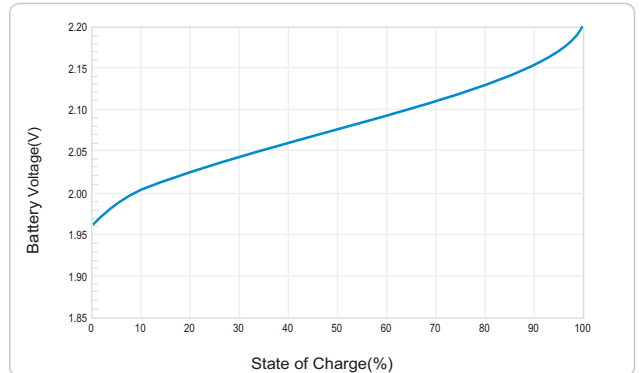

Cycle Life in Relation to Depth Of Discharge

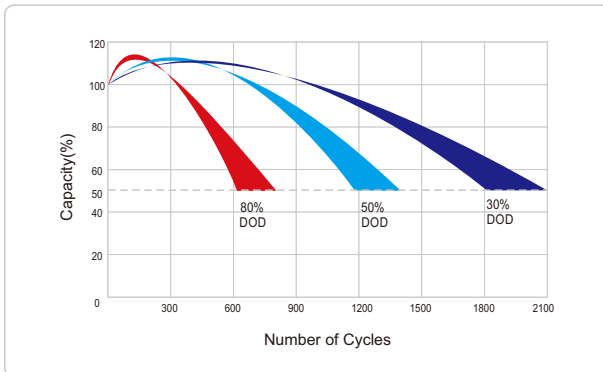

Self-discharge Characteristic

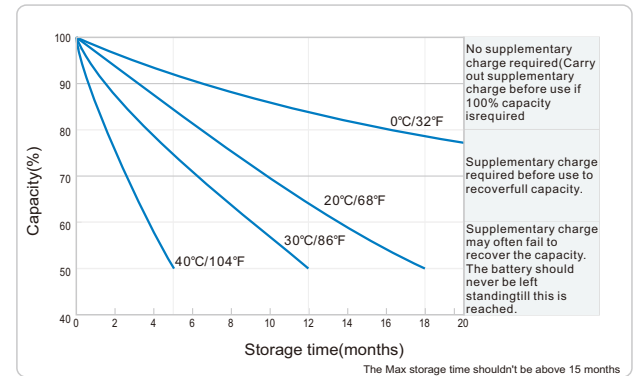

LEOCH INTERNATIONAL SALES OFFICE:

Add:14th Floor, Block A, Building 6,
Zhonggang Plaza, Exhibition Bay, Shenzhen, China.
Tel:+86-755-86036060(100 lines)
E-mail: export@leoch.com
web: www.leoch.com