



DEEP CYCLE AGM TECHNOLOGY

DEEP CYCLE AGM BATTERY

LDC8-180-GC8



GACELL A/S · Sletten 17 · 7500 Holstebro · DK
+45 961 02 961 · www.gacell-power.dk

FEATURES&BENEFITS

- True deep cycle AGM technology-GREEN SOLUTION
- Over 99.99% virgin lead for grid plate and active material
- Heavy duty grid/paste design for deep cycle application
- Maintenance free, non-spillable, valve-regulated
- Double separator configuration: long cycle life & High energy density and super anti-vibration design
- Low self-discharge for longer shelf life



ELECTRICAL SPECIFICATIONS

Voltage (V)	Capacity(Ah)					Reserve Capacity(min)		
	100HR	20HR	10HR	5HR	3HR	25A	56A	75A
8	200	182	170	153	135	365	155	/


PHYSICAL SPECIFICATIONS

Dimensions(mm/inches)				Weight (kg/lbs)	Terminal Type (Standard)	Case Material
Length	Width	Height	Total Height			
260/10.24	180/7.09	252/9.92	274/10.79	30.8/67.9	MT	PP

Operating Temperature Range		
Discharge	Charge	Storage
-15°C~50°C(5°F~122°F)	0C~40°C(32°F-104°F)	-15°C~40°C(5°F~104°F)

LDC8-180-GC8


DIMENSIONS

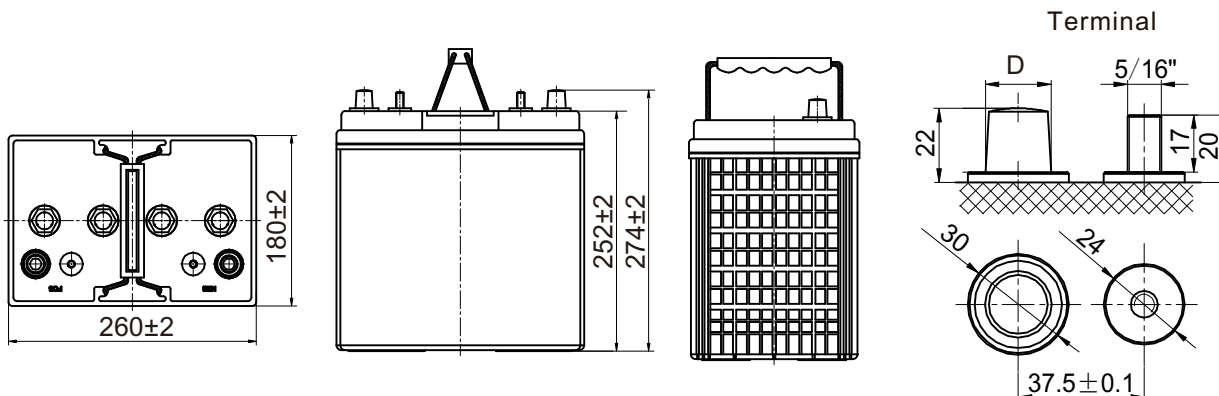


Note: D: Positive $19.5_{-0.3}^0$, D: Negative $17.9_{-0.3}^0$; Terminal Torque Values in-lb(Nm): 176-203(20-23)

PERFORMANCE CHARACTERISTICS


Charging Profile

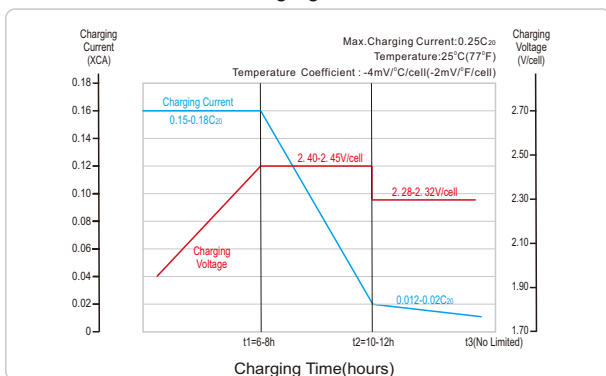


Relationship of OCV and State Of Charge (25°C, 77°F)

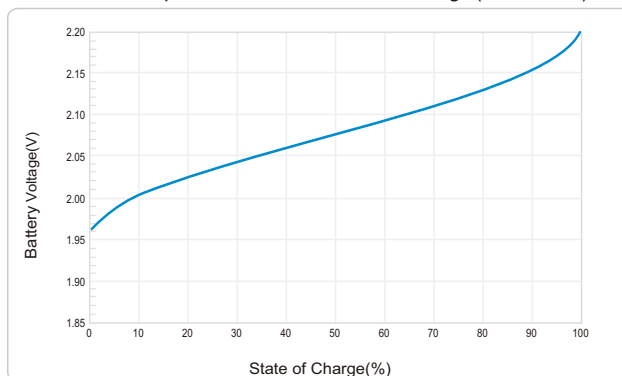

Cycle Life in Relation to Depth Of Discharge

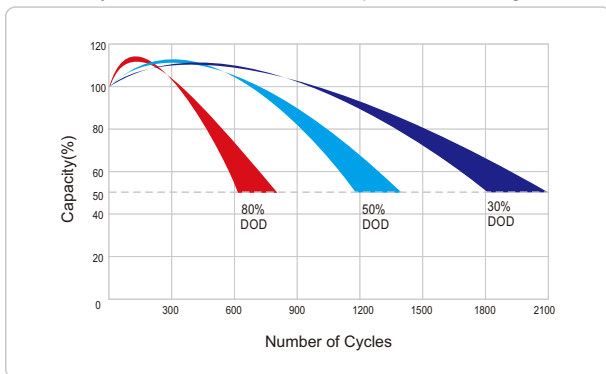

Self-discharge Characteristic

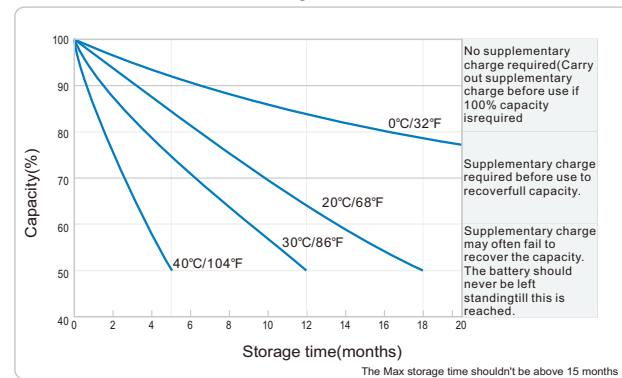

LEOCH INTERNATIONAL SALES OFFICE:

Add: 14th Floor, Block A, Building 6,
Zhonggang Plaza, Exhibition Bay, Shenzhen, China.
Tel: +86-755-86036060 (100 lines)
E-mail: export@leoch.com
web: www.leoch.com

DEEP CYCLE AGM BATTERY